




IO引出排针

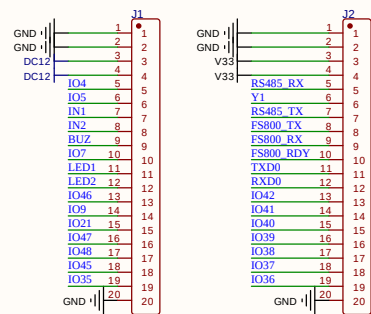


输入输出






485

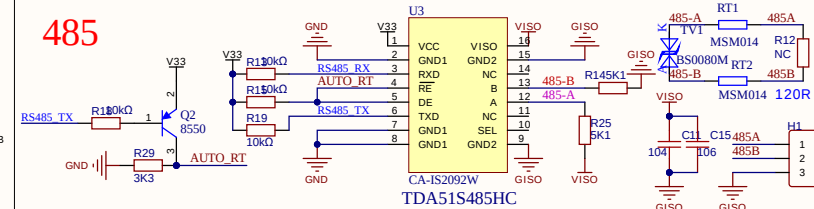

温湿度

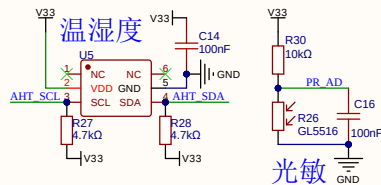


NAND FLASH


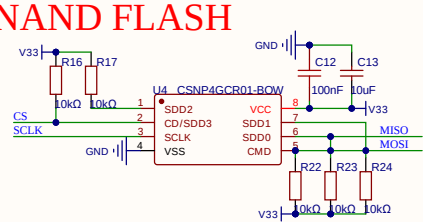


继电器


LCD + KEY



ESP32-S3

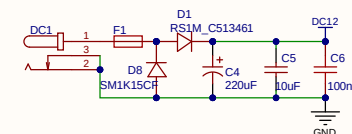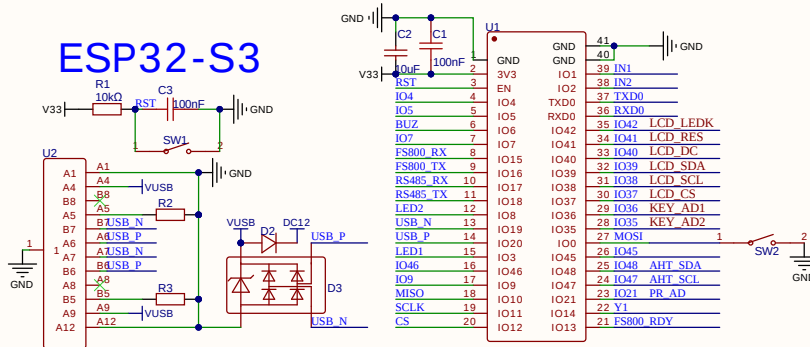

4G 模块

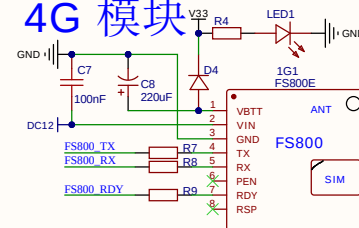

DCDC 电源

5~16V输入, 10W

3.3V电源从4G模块获取!!!

Board Stack Report