TLE9471-3ES

Lite CAN SBC Family

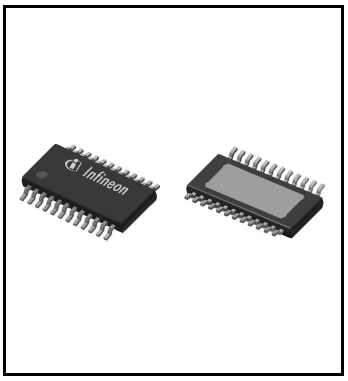

1 Overview

Quality Requirement Category: Automotive

Key Features

- Very low quiescent current consumption in Stop- and Sleep Mode
- Periodic Cyclic Wake in SBC Normal-, Stop- and Sleep Mode
- Periodic Cyclic Sense in SBC Normal-, Stop- and Sleep Mode
- Low-Drop Buck DC/DC Voltage Regulator 5V, 500mA for main supply with integrated spread spectrum modulation feature for optimum EMC performance
- Low-Drop Linear Voltage Regulator 5V, 100mA, protected features for off-board usage
- High-Speed CAN transceiver supporting FD communication up to 5 Mbit/s and featuring CAN Partial Networking & CAN FD tolerant mode according to ISO 11898-2:2016 & SAE J2284
- Fully compliant to “Hardware Requirements for LIN, CAN and FlexRay Interfaces in Automotive Applications” Revision 1.3, 2012-05-04
- Charge pump-Output for N-channel MOSFET reverse-polarity protection with integrated spread spectrum modulation feature for optimum EMC performance
- Universal High-Voltage Wake Input for voltage level monitoring and wake detection
- General Purpose High-Voltage In- and Output (GPIO) configurable as Fail Output, Wake Input, Low-Side switch or High-Side switch
- HIgh-Voltage Measurement Function as alternate pin assignment
- Fail Outputs for Fail-Safe signalization
- Configurable wake-up sources
- Reset Output & Interrupt Output
- Configurable timeout and window watchdog
- Overtemperature and short circuit protection feature
- Dedicated TEST pin for SBC Development Mode entry (watchdog counter stopped)
- Software compatible to all SBC families TLE926x and TLE927x
- Wide supply input voltage and temperature range
- Optimized for Electromagnetic Compatibility (EMC)
- Optimized for low Electromagnetic Emission (EME)
- Optimized for high immunity against Electromagnetic Interference (EMI)
- Green Product (RoHS compliant)

Confidential for ALRT Only

www.infineon.com
Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Overview

- AEC Qualified

Scalable System Basis Chip Family

- Product family for complete scalable application coverage
- Optimized feature set for optimum system design
- Dedicated Data Sheets are available for different product variants
- Complete compatibility (hardware- and software across the family
- PG-TSDSO-24-1 package product variants with exposed pad (EP)
- CAN Partial Networking variants (-3ES)
- Supporting chokeless CAN communication
- Product variants for 5V (TLE94xxyy) and 3.3V (TLE94xxyyV33) output voltage for main regulator
- Software compatible to all SBC families TLE926x and TLE927x

Type	Package	Marking
TLE9471-3ES	PG-TSDSO-24-1	TLE9471-3ES

Device Description

The TLE9471-3ES is a monolithically integrated circuit in an exposed pad PG-TSDSO-24-1 (150mil) power package. The device is designed for various CAN automotive applications as main supply for the microcontroller and as interface for a CAN bus network including the CAN Partial Networking feature.

To support these applications, the System Basis Chip (SBC) provides the main functions, such as a 5V low-dropout voltage regulator (Buck SMPS) for e.g. a microcontroller supply, another 5V low-dropout voltage regulator with off-board protection for e.g. sensor supply, a HS-CAN transceiver supporting CAN FD and CAN Partial Networking (incl. FD tolerant mode) for data transmission, a high-voltage GPIO with embedded protective functions and a 16-bit Serial Peripheral Interface (SPI) to control and monitor the device. Also implemented are a configurable timeout / window watchdog circuit with a reset feature, one Fail Output and an undervoltage reset feature.

The device offers low-power modes in order to minimize current consumption on applications that are connected permanently to the battery. A wake-up from the low-power mode is possible via a message on the buses, via the bi-level sensitive monitoring/wake-up input as well as via cyclic wake.

The device is designed to withstand the severe conditions of automotive applications

Confidential for ALRT Only

Table of Contents

1 Overview ... 1
2 Block Diagram ... 7
3 Pin Configuration ... 8
3.1 Pin Assignment ... 8
3.2 Pin Definitions and Functions ... 8
3.3 Hints for Unused Pins ... 10
3.4 Hints for Alternate Pin Functions ... 10
4 General Product Characteristics ... 11
4.1 Absolute Maximum Ratings ... 11
4.2 Functional Range ... 13
4.3 Thermal Resistance ... 14
4.4 Current Consumption ... 15
5 System Features ... 19
5.1 Block Description of State Machine ... 20
5.1.1 Device Configuration and SBC Init Mode ... 21
5.1.1.1 Device Configuration ... 21
5.1.1.2 SBC Init Mode ... 24
5.1.2 SBC Normal Mode ... 25
5.1.3 SBC Stop Mode ... 26
5.1.4 SBC Sleep Mode ... 27
5.1.5 SBC Restart Mode ... 28
5.1.6 SBC Fail-Safe Mode ... 29
5.1.7 SBC Development Mode ... 30
5.1.8 Electrical Characteristics for Pin TEST ... 32
5.2 Wake Features ... 33
5.2.1 Cyclic Sense ... 33
5.2.1.1 Configuration and Operation of Cyclic Sense ... 34
5.2.1.2 Cyclic Sense in Low-Power Mode ... 37
5.2.2 Cyclic Wake ... 38
5.2.3 Internal Timer ... 39
5.3 Charge Pump Output for Reverse Polarity Protection ... 40
5.3.1 Electrical Characteristics for Charge Pump ... 41
5.4 High-Voltage Measurement Interface ... 42
5.4.1 Block Description ... 42
5.4.2 Functional Description ... 42
5.4.3 Electrical Characteristics for Measurement Interface ... 44
5.5 Spread Spectrum Modulation Frequency Function ... 45
5.6 Partial Networking on CAN ... 46
5.6.1 CAN Partial Networking - Selective Wake Feature ... 46
5.6.2 SBC Partial Networking Function ... 47
5.6.2.1 Activation of SWK ... 48
5.6.2.2 Wake-up Pattern (WUP) ... 49
5.6.2.3 Wake-up Frame (WUF) ... 49
5.6.2.4 CAN Protocol Error Counter ... 50
5.6.3 Diagnoses Flags ... 51

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

5.6.3.1 PWRON/RESET-FLAG ... 51
5.6.3.2 BUSERR-Flag ... 51
5.6.3.3 TXD Dominant Time-out flag ... 51
5.6.3.4 WUP Flag ... 51
5.6.3.5 WUF Flag (WUF) ... 51
5.6.3.6 SYSERR Flag (SYSERR) ... 51
5.6.3.7 Configuration Error ... 51
5.6.3.8 CAN Bus Timeout-Flag (CANTO) ... 52
5.6.3.9 CAN Bus Silence-Flag (CANSIL) ... 52
5.6.3.10 SYNC-FLAG (SYNC) ... 52
5.6.3.11 SWK_SET FLAG (SWK_SET) ... 52
5.6.4 SBC Modes for Selective Wake (SWK) ... 54
5.6.4.1 SBC Normal Mode with SWK ... 54
5.6.4.2 SBC Stop Mode with SWK ... 55
5.6.4.3 SBC Sleep Mode with SWK ... 56
5.6.4.4 SBC Restart Mode with SWK ... 57
5.6.4.5 SBC Fail-Safe Mode with SWK ... 58
5.6.5 Wake-up ... 58
5.6.6 Configuration for SWK ... 58
5.6.7 CAN Flexible Data Rate (CAN FD) Tolerant Mode ... 60
5.6.8 Clock and Data Recovery ... 61
5.6.8.1 Configuring the Clock Data Recovery for SWK ... 61
5.6.8.2 Setup of Clock and Data Recovery ... 62
5.6.9 Electrical Characteristics ... 63

6 Voltage Regulator 1 ... 65
6.1 Block Description ... 65
6.2 Functional Description ... 66
6.2.1 Pulse With Modulation (PWM) and Spread Spectrum Modulation ... 66
6.2.2 Low-Power Mode Operation ... 66
6.2.3 PWM to Low-Power Mode Handover ... 66
6.2.4 External Components Selection ... 67
6.3 Electrical Characteristics ... 68

7 Voltage Regulator 2 ... 70
7.1 Block Description ... 70
7.2 Functional Description ... 71
7.2.1 Short to Battery Protection ... 71
7.3 Electrical Characteristics ... 72

8 High Speed CAN Transceiver ... 75
8.1 Block Description ... 75
8.2 Functional Description ... 75
8.2.1 CAN OFF Mode ... 77
8.2.2 CAN Normal Mode ... 77
8.2.3 CAN Receive Only Mode ... 78
8.2.4 CAN Wake Capable Mode ... 78
8.2.5 CAN Bus termination ... 79
8.2.6 TXD Time-out Feature ... 79

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

8.2.7 Bus Dominant Clamping ... 80
8.2.8 Undervoltage Detection ... 80
8.3 Electrical Characteristics ... 81

9 High-Voltage Wake and Voltage Monitoring Input ... 88
9.1 Block Description ... 88
9.2 High-Voltage Wake Function ... 89
9.2.1 Functional Description ... 89
9.2.2 Wake Input Configuration ... 90
9.2.3 Wake configuration for Cyclic Sense ... 91
9.2.4 High-Voltage Sensing as Alternate Function ... 91
9.3 Electrical Characteristics ... 92

10 Interrupt Function ... 93
10.1 Block and Functional Description ... 93
10.2 Electrical Characteristics ... 95

11 Fail Output and General Purpose I/O (GPIO) ... 96
11.1 Block and Functional Description ... 96
11.1.1 Fail-Output Function ... 97
11.1.2 General Purpose I/O Function as Alternate Function ... 98
11.1.3 WK and FO/GPIO HV-Sensing Function as Alternative Function ... 100
11.2 Electrical Characteristics ... 102

12 Supervision Functions ... 104
12.1 Reset Function ... 104
12.1.1 Reset Output Description ... 104
12.1.2 Soft Reset Description ... 105
12.2 Watchdog Function ... 105
12.2.1 Time-Out Watchdog ... 107
12.2.2 Window Watchdog ... 108
12.2.3 Watchdog Setting Check Sum ... 108
12.2.4 Watchdog during SBC Stop Mode ... 110
12.2.5 Watchdog Start in SBC Stop Mode due to Bus Wake ... 110
12.3 VS Power On Reset ... 111
12.4 VS Under- and Overvoltage ... 111
12.4.1 VS Undervoltage ... 111
12.4.2 VS Overvoltage ... 112
12.5 VCC1 Over-/ Undervoltage and Undervoltage Prewarning ... 112
12.5.1 VCC1 Undervoltage and Undervoltage Prewarning ... 112
12.5.2 VCC1 Overvoltage ... 113
12.6 VCC1 Short Circuit Diagnostics ... 113
12.7 VCC2 Undervoltage and VCAN Undervoltage ... 114
12.8 Thermal Protection ... 115
12.8.1 Individual Thermal Shutdown ... 115
12.8.2 Temperature Prewarning ... 115
12.8.3 SBC Thermal Shutdown ... 115
12.9 Electrical Characteristics ... 116

13 Serial Peripheral Interface ... 120
13.1 SPI Block Description ... 120

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

13.2 Failure Signalization in the SPI Data Output 121
13.3 SPI Programming 123
13.4 SPI Bit Mapping 125
13.5 SPI Control Registers 128
13.5.1 General Control Registers 131
13.5.2 Selective Wake Control Registers 143
13.6 SPI Status Information Registers 155
13.6.1 General Status Registers 156
13.6.2 Selective Wake Status Registers 164
13.6.3 Family and Product Information Register 166
13.7 Electrical Characteristics 167
14 Application Information 169
14.1 Application Diagrams 169
14.2 ESD Tests 175
14.3 Thermal Behavior of Package 176
14.4 Further Application Information 177
15 Package Outlines 178
16 Revision History 179

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

2 Block Diagram

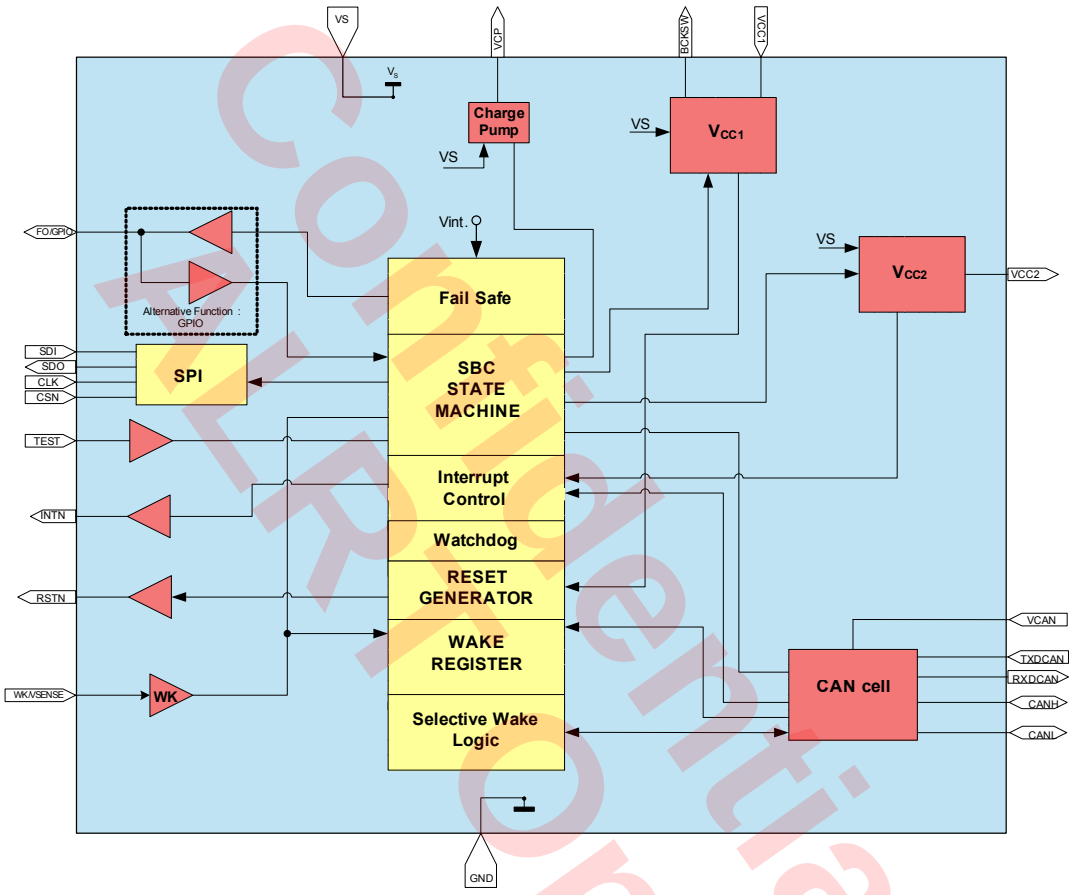

Figure 1 TLE9471-3ES Block Diagram

Confidential for ALRT Only

3 Pin Configuration

3.1 Pin Assignment

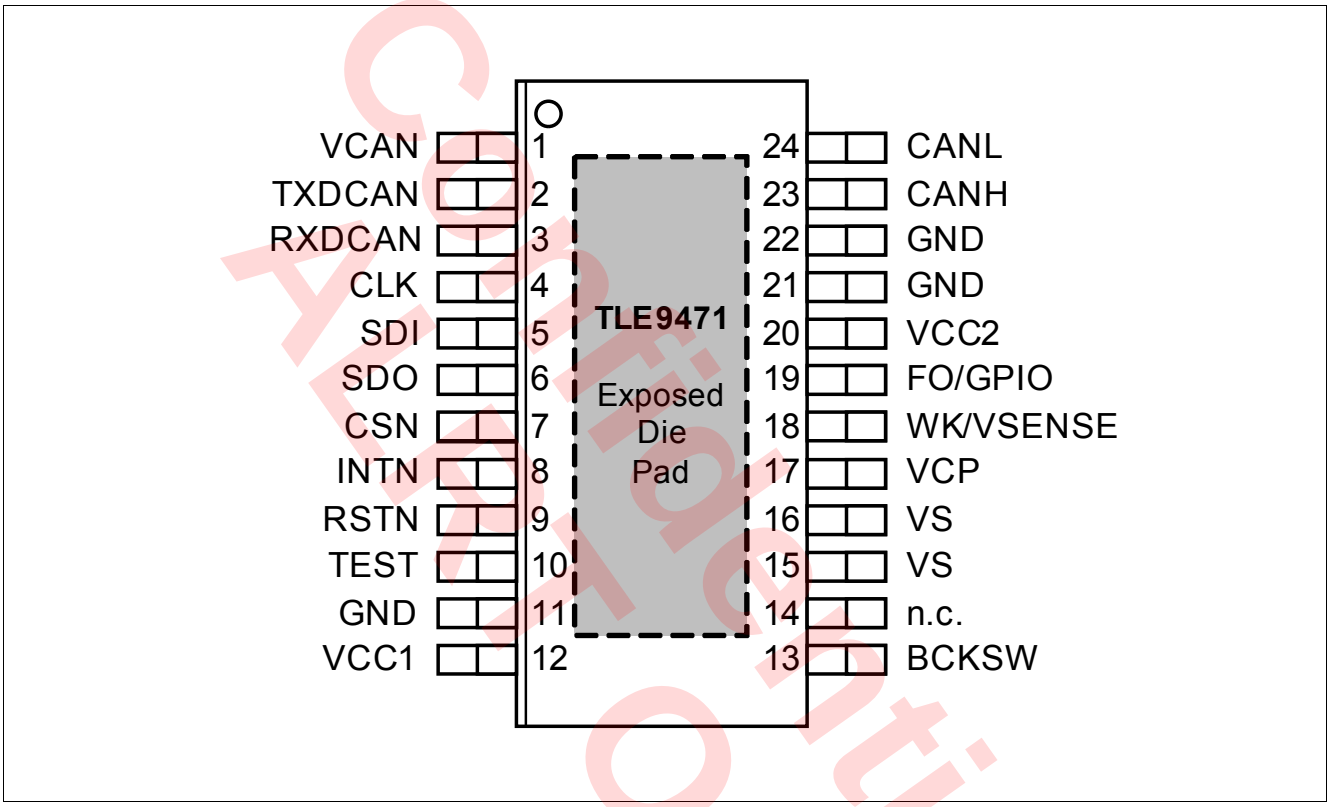

Figure 2 Pin Configuration

3.2 Pin Definitions and Functions

Pin	Symbol	Function
1	VCAN	**HS-CAN Supply Input;** For internal HS-CAN cell needed for CAN Normal and Receive Only Mode
2	TXDCAN	**Transmit CAN**
3	RXDCAN	**Receive CAN**
4	CLK	**SPI Clock Input**
5	SDI	**SPI Data Input;** input for SBC (=MOSI)
6	SDO	**SPI Data Output;** output from SBC (=MISO)
7	CSN	**SPI Chip Select Not Input;** active low
8	INTN	**Interrupt Output;** used as wake-up flag for microcontroller in SBC Stop or Normal Mode and for indicating failures. Active low. During start-up used to set the SBC configuration in case of watchdog trigger failure. External pull-up sets config 1/3, no external pull-up sets config 2/4.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Pin	Symbol	Function
9	RSTN	**Reset Output;** active low, internal pull-up
10	TEST	**Test Pin;** Connect to VCC1 to activate SBC Development Mode (see Chapter 5.1.7). Integrated pull-down resistor. Connect to GND for normal user mode operation
11	GND	**Ground;** DC/DC Power GND
12	VCC1	**Sense Voltage Regulator 1;** Feedback Input for Buck Converter
13	BCKSW	**Buck Switched Mode Power Supply Output**
14	n.c.	**not connected;** internally not bonded
15	VS	**Supply Voltage;** Supply for VCC1 power stage - both VS pins must be connected together on same battery potential for proper operation; Connected to Battery Voltage with Reverse Protection Diode and Filter against EMC
16	VS	**Supply Voltage;** Main supply of device - both VS pins must be connected together on same battery potential for proper operation; Connected to Battery Voltage with Reverse Protection Diode and Filter against EMC
17	VCP	**Charge Pump Output;** For driving the gate of external N-channel MOSFETs, e.g. for reverse polarity protection or Kl.30 switch. Always place a 1kΩ resistor in series for protection
18	WK/VSENSE	**Wake Input;** **Sense Input;** Alternative function: HV-measurement function input
19	FO/GPIO	**Fail Output;** Open Drain Output, active low; **GPIO;** Alternative function: configurable pin as WK, or LS, or HS supplied by VS (default is FO, see also Chapter 11.1.1) **Sense Output;** Alternative function: if HV-measurement function is configured
20	VCC2	**Voltage Regulator Output 2**
21	GND	**Ground;** Analog GND
22	GND	**Ground;** CAN GND
23	CANH	**CAN High Bus Pin**
24	CANL	**CAN Low Bus Pin**
Cooling Tab	GND	Cooling Tab - Exposed Die Pad; For cooling purposes only, do not use as an electrical ground[1)]

1) The exposed die pad at the bottom of the package allows better power dissipation of heat from the SBC via the PCB. The exposed die pad is not connected to any active part of the IC. However, it should be connected to GND for the best EMC performance.

Note: Both VS Pins must be connected to same battery potential;
all GND pins as well as the Cooling Tab must be connected to one common GND potential

Confidential for ALRT only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

3.3 Hints for Unused Pins

It must be ensured that the correct configurations are also selected, i.e. in case functions are not used that they are disabled via SPI. Unused pins should be handled as follows:

- WK/VSENSE: connect to GND and disable WK inputs via SPI
- RSTN / INTN / FO: leave open
- VCC2: leave open and keep disabled
- VCAN: connect to VCC1
- CANH/L, RXDCAN, TXDCAN: leave all pins open
- TEST: Leave open for normal user mode operation or connect to VCC1 during power-up to activate SBC Development Mode;
- **n.c.**: not connected; internally not bonded; leave open
- If unused pins are routed to an external connector which leaves the ECU, then these pins should have provision for a zero ohm jumper (depopulated if unused) or ESD protection

3.4 Hints for Alternate Pin Functions

In case of SPI selectable alternate pin functions, it must be ensured that the correct configurations are also selected via SPI, in case it is not done automatically. Please consult the respective chapter. In addition, following topics shall be considered:

- WK/VSENSE: The pin can be either used as high-voltage wake and monitoring function or for a voltage measurement function (via bit setting WK_MEAS = ‘1’). In the second case, the WK pin shall not be used / assigned for any wake detection nor cyclic sense functionality, i.e. WK must be disabled in the register WK_CTRL_1 and the level information is to be ignored in the register WK_LVL_STAT.
- FO/GPIO: The pin can also be configured as an GPIO in the GPIO_CTRL register. In this case, the pin shall not be used for any fail output functionality.
  The default configuration after power on reset (POR) is FO.

Confidential for ALRT Only

4 General Product Characteristics

4.1 Absolute Maximum Ratings

Table 1 Absolute Maximum Ratings[1)]

T_j = -40°C to +150°; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Voltages							
Supply Voltage VS	$V_{S,max}$	-0.3	–	28	V	–	P_4.1.1
Supply Voltage VS	$V_{S,max}$	-0.3	–	40	V	Load Dump, max. 400 ms	P_4.1.2
Voltage Regulator 1 Sense Input	$V_{CC1,max}$	-0.3	–	5.5	V	[2)]	P_4.1.3
Buck Switch Pin BCKSW	$V_{BCKSW,max}$	-0.3	–	V_S + 0.3	V	–	P_4.1.4
Voltage Regulator 2	$V_{CC2,max}$	-0.3	–	28	V	V_{CC2} = 40V for Load Dump, max. 400 ms;	P_4.1.5
Charge Pump Output	$V_{CP,max}$	-0.3	–	V_S + 16	V		P_4.1.6
Wake Input WK/VSENSE	$V_{WK,max}$	-0.3	–	40	V	–	P_4.1.7
Fail Output FO/GPIO	$V_{FO_TEST,max}$	-0.3	–	V_S + 0.3	V	–	P_4.1.8
CANH, CANL	$V_{BUS,max}$	-27	–	40	V	–	P_4.1.9
Logic Input Pins (CSN, CLK, SDI, TXDCAN, TEST)	$V_{I,max}$	-0.3	–	V_{CC1} + 0.3	V	–	P_4.1.10
Logic Output Pins (SDO, RSTN, INTN, RXDCAN)	$V_{O,max}$	-0.3	–	V_{CC1} + 0.3	V	–	P_4.1.11
VCAN Input Voltage	$V_{VCAN,max}$	-0.3	–	5.5	V		P_4.1.12
Maximum Differential CAN Bus Voltage	$V_{CAN_Diff,max}$	-5	–	10	V	–	P_4.1.20
Temperatures							
Junction Temperature	T_j	-40	–	150	°C	–	P_4.1.13
Storage Temperature	T_{stg}	-55	–	150	°C	–	P_4.1.14
ESD Susceptibility							
ESD Resistivity	$V_{ESD,11}$	-2	–	2	kV	HBM[3)]	P_4.1.15
ESD Resistivity to GND, CANH, CANL	$V_{ESD,12}$	-8	–	8	kV	HBM[4)3)]	P_4.1.16

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 1 Absolute Maximum Ratings[1)] (cont'd)

T_j = -40°C to +150°; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
ESD Resistivity to GND	$V_{ESD,21}$	-500	–	500	V	CDM[5)]	P_4.1.17
ESD Resistivity Pin 1, 12,13,24 (corner pins) to GND	$V_{ESD,22}$	-750	–	750	V	CDM[5)]	P_4.1.18

1) Not subject to production test, specified by design.
2) The VCC1 and digital I/O maximum rating can be 6.0V for a limited time
3) ESD susceptibility, HBM according to ANSI/ESDA/JEDEC JS-001 (1.5 kΩ, 100 pF)
4) For ESD "GUN" Resistivity (according to IEC61000-4-2 "gun test" (150pF, 330Ω)), is shown in Application Information and test report will be provided from IBEE
5) ESD susceptibility, Charged Device Model "CDM" EIA/JESD22-C101 or ESDA STM5.3.1

Notes

1. *Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*
2. *Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.*

Confidential for ALRT Only

4.2 Functional Range

Table 2 Functional Range[1)]

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Supply Voltage	$V_{S,func}$	V_{POR}	–	28	V	[2)] V_{POR} see section Chapter 12.9	P_4.2.1
CAN Supply Voltage	$V_{CAN,func}$	4.75	–	5.25	V	–	P_4.2.2
SPI Frequency	f_{SPI}	–	–	4	MHz	see Chapter 13.7 for $f_{SPI,max}$	P_4.2.3
Junction Temperature	T_j	-40	–	150	°C	–	P_4.2.4

1) Not subject to production test, specified by design.
2) Including Power-On Reset, Over- and Undervoltage Protection

Note: Within the functional range the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the related electrical characteristics table.

Device Behavior Outside of Specified Functional Range:

- 28V < $V_{S,func}$ < 40V: Device will still be functional including the state machine; the specified electrical characteristics might not be ensured anymore. The regulators VCC1/2 are working properly, however, a thermal shutdown might occur due to high power dissipation. The specified SPI communication speed is ensured; the absolute maximum ratings are not violated, however the device is not intended for continuous operation of VS >28V. The device operation at high junction temperatures for long periods might reduce the operating life time;
- V_{CAN} < 4.75V: The undervoltage bit VCAN_UV will be set in the SPI register BUS_STAT and the transmitter will be disabled as long as the UV condition is present;
- 5.25V < V_{CAN} < 6.0V: CAN transceiver still functional. However, the communication might fail due to out-of-spec operation;
- $V_{POR,f}$ < VS < 5.5V: Device will still be functional; the specified electrical characteristics might not be ensured anymore
  - The voltage regulators will enter the low-drop operation mode ,
  - A VCC1_UV reset could be triggered depending on the Vrtx settings,
  - GPIO switch behavior will depend on the respective configuration:
    - HS/LS stays on as long as possible.
    - An unwanted overcurrent shutdown may occur.
    - OC shutdown bit set and the respective HS/LS switch will stay off;
  - FO output will remain on if they were enabled before VS > 5.5V,
  - The specified SPI communication speed is ensured.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

4.3 Thermal Resistance

Table 3 Thermal Resistance[1)]

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Junction to Soldering Point	$R_{th(JSP)}$	–	14	–	K/W	Exposed Pad	P_4.3.1
Junction to Ambient	$R_{th(JA)}$	–	35	–	K/W	2)	P_4.3.2

1) Not subject to production test, specified by design.

2) Specified $R_{th(JA)}$ value is according to Jedec JESD51-2,-5,-7 at natural convection on FR4 2s2p board for a power dissipation of 1.5W; the product (chip+package) was simulated on a 76.2x114.3x1.5mm^3 with 2 inner copper layers (2 x 70µm Cu, 2 x 35µm C); where applicable a thermal via array under the exposed pad contacted the first inner copper layer and 300mm2 cooling areas on the top layer and bottom layers (70µm).

Confidential for ALRT Only

4.4 Current Consumption

Table 4 Current Consumption

Current consumption values are specified at Tj = 25°C, VS = 13.5V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
SBC Normal Mode							
Normal Mode current consumption	I_{Normal}	–	3.5	6.5	mA	V_S = 5.5 V to 28 V; T_j = -40 °C to +150 °C; VCC2, CAN = off	P_4.4.1
SBC Stop Mode							
Stop Mode current consumption	$I_{Stop_1,25}$	–	44	52	µA	1)VCC2 & CAN2) = off, Cyclic Wake/Sense & Watchdog = off; no load on VCC1; I_PEAK_TH = '0'	P_4.4.2
Stop Mode current consumption	$I_{Stop_1,85}$	–	50	72	µA	1)3)T_j = 85°C; VCC2 & CAN2) = off; Cyclic Wake/Sense & Watchdog = off; no load on VCC1; I_PEAK_TH = '0'	P_4.4.3
Stop Mode current consumption (high active peak threshold)	$I_{Stop_2,25}$	–	65	72	µA	1)VCC2 & CAN2) = off; Cyclic Wake/Sense & Watchdog = off; no load on VCC1; I_PEAK_TH = '1'	P_4.4.4
Stop Mode current consumption (high active peak threshold)	$I_{Stop_2,85}$	–	70	92	µA	1)3)T_j = 85°C; VCC2 & CAN2)= off; Cyclic Wake/Sense & Watchdog = off; no load on VCC1; I_PEAK_TH = '1'	P_4.4.5
SBC Sleep Mode							
Sleep Mode current consumption	$I_{Sleep,25}$	–	15	25	µA	VCC2 & CAN2)= off; Cyclic Wake/Sense = off	P_4.4.6
Sleep Mode current consumption	$I_{Sleep,85}$	–	25	35	µA	3)T_j = 85°C; VCC2 & CAN2) = off; Cyclic Wake/Sense = off	P_4.4.7
Feature Incremental Current Consumption							

Confidential for ALRT Only

Table 4 Current Consumption (cont'd)

Current consumption values are specified at Tj = 25°C, VS = 13.5V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Current consumption for CAN module, recessive state	$I_{CAN,rec}$	–	2	3	mA	3)SBC Normal/Stop Mode; CAN Normal Mode; VCC2 connected to VCAN; VTXDCAN = VCC1; no RL on CAN	P_4.4.8
Current consumption for CAN module, dominant state	$I_{CAN,dom}$	–	3	5.0	mA	3)SBC Normal/Stop Mode; CAN Normal Mode; VCC1 connected to VCAN; VTXDCAN = GND; no RL on CAN	P_4.4.9
Current consumption for CAN module, Receive Only Mode	$I_{CAN,RcvOnly}$	–	0.9	1.2	mA	3)4)SBC Normal/Stop Mode; CAN Receive Only Mode; VCC1 connected to VCAN; VTXDCAN = VCC1; no RL on CAN	P_4.4.10
Current consumption during CAN Partial Networking frame detect mode (RX_WK_ SEL = '0')	$I_{CAN,SWK,25}$	–	560	690	µA	3)T_j = 25°C; SBC Stop Mode; WK, VCC2 = off; CAN SWK wake capable, SWK Receiver enabled, WUF detect; no RL on CAN;	P_4.4.11
Current consumption during CAN Partial Networking frame detect mode (RX_WK_ SEL = '0')	$I_{CAN,SWK,85}$	–	600	720	µA	3)T_j = 85°C; SBC Stop Mode; WK, VCC2 = off; CAN SWK wake capable, SWK Receiver enabled, WUF detect; no RL on CAN;	P_4.4.12
Current consumption for WK, GPIO wake capability (all wake inputs)	$I_{Wake,WK,25}$	–	0.2	2	µA	5)6)7) SBC Sleep Mode; WK wake capable; no activity on WK pin; CAN = off; VCC2 = off	P_4.4.13
Current consumption for WK, GPIO wake capability (all wake inputs)	$I_{Wake,WK,85}$	–	0.5	3	µA	3)5)6)7)SBC Sleep Mode; T_j = 85°C; WK wake capable; no activity on WK pin; CAN = off; VCC2 = off	P_4.4.14

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Table 4 Current Consumption (cont'd)

Current consumption values are specified at Tj = 25°C, VS = 13.5V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Current consumption for CAN wake capability (tsilence expired)	$I_{Wake,CAN,25}$	–	4.5	6	µA	2)5)SBC Sleep Mode; CAN wake capable; WK = off; VCC2 = off;	P_4.4.15
Current consumption for CAN wake capability (tsilence expired)	$I_{Wake,CAN,85}$	–	5.5	7	µA	2)3)5)SBC Sleep Mode; T_j = 85°C; CAN wake capable; WK = off; VCC2 = off;	P_4.4.16
VCC2 Normal Mode current consumption	$I_{Normal,VCC2}$	–	2.5	3.5	mA	V_S = 5.5 V to 28 V; T_j = -40 °C to +150 °C; VCC2 = on (no load)	P_4.4.17
Current consumption for VCC2 in SBC Sleep Mode	$I_{Sleep,VCC2,25}$	–	25	35	µA	1)5)SBC Sleep Mode; VCC2 = on (no load); CAN, WK = off	P_4.4.18
Current consumption for VCC2 in SBC Sleep Mode	$I_{Sleep,VCC2,85}$	–	30	40	µA	1)3)5)SBC Sleep Mode; T_j = 85°C; VCC2 = on (no load); CAN, WK = off	P_4.4.19
Current consumption for GPIO if configured as low-side / high-side in SBC Stop Mode	$I_{Stop,GPIO,25}$	–	400	550	µA	3)5)SBC Stop Mode; GPIO configured as HS or LS with 100% duty cycle (no load); CAN, WK = off	P_4.4.20
Current consumption for GPIO if configured as low-side / high-side in SBC Stop Mode	$I_{Stop,GPIO,85}$	–	450	600	µA	3)5)SBC Stop Mode; T_j = 85°C; GPIO configured as HS or LS with 100% duty cycle (no load); CAN, WK = off	P_4.4.21
Current consumption for cyclic sense function	$I_{Stop,CS25}$	–	20	26	µA	5)8)9)SBC Stop Mode; WD = off;	P_4.4.22
Current consumption for cyclic sense function	$I_{Stop,CS85}$	–	24	35	µA	3)5)8)9)SBC Stop Mode; T_j = 85°C; WD = off;	P_4.4.23

Confidential for ALRT Only

Table 4 Current Consumption (cont'd)

Current consumption values are specified at Tj = 25°C, VS = 13.5V, all outputs open (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Current consumption for watchdog active in Stop Mode	$I_{Stop,WD25}$	–	20	26	µA	3)SBC Stop Mode; Watchdog running;	P_4.4.24
Current consumption for watchdog active in Stop Mode	$I_{Stop,WD85}$	–	24	35	µA	3)SBC Stop Mode; T_j = 85°C; Watchdog running;	P_4.4.25

1) If the load current on VCC1 will exceed the configured VCC1 active peak threshold $I_{VCC1,Ipeak1,r}$ or $I_{VCC1,Ipeak2,r}$, the current consumption will increase by typ. 2.9mA to ensure optimum dynamic load behavior. Same applies to VCC2. See also Chapter 7, Chapter 7.
2) CAN not configured in selective wake mode.
3) Not subject to production test, specified by design.
4) Current consumption adder also applies for during WUF detection (frame detect mode) when CAN Partial Networking is activated.
5) Current consumption adders of features defined for SBC Stop Mode also apply for SBC Sleep Mode and vice versa. Wake input signals are stable (i.e. not toggling), cyclic wake/sense & watchdog are OFF (unless otherwise specified).
6) No pull-up or pull-down configuration selected.
7) The specified WK current consumption adder for wake capability applies regardless how many WK inputs are activated, i.e GPIO configured as wake input.
8) GPIO configured as HS used for cyclic sense, Timer with 20ms period, 0.1ms on-time, no load on GPIO.

   In general the current consumption adder for cyclic sense in SBC Stop Mode can be calculated with below equation (no load on FO/GPIO):
   IStop,CS_typ = 18µA + ($I_{Stop,GPIO,25}$ *ton/TPer)
   where the 18uA is the base current consumption of the digital cyclic sense/wake functionality;

9) Also applies to Cyclic Wake but without adder from HS biasing contribution

Note: There is no additional current consumption contribution in SBC Normal Mode due to PWM generators or Timers.

Note: The quiescent current consumption in SBC Stop- and Sleep Mode will increase for VS <9V .

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5 System Features

This chapter describes the system features and behavior of the TLE9471-3ES:

- State machine
- Device configuration
- SBC mode control
- State of supply and peripherals
- System functions such as cyclic sense or cyclic wake
- Charge pump output for reverse polarity protection
- High-voltage measurement interface

The System Basis Chip (SBC) offers six operating modes:

- SBC Init Mode: Power-up of the device and after a soft reset,
- SBC Normal Mode: The main operating mode of the device,
- SBC Stop Mode: The first-level power saving mode with the main voltage regulator VCC1 enabled,
- SBC Sleep Mode: The second-level power saving mode with VCC1 disabled,
- SBC Restart Mode: An intermediate mode after a wake event from SBC Sleep or Fail-Safe Mode or after a failure (e.g. WD failure, VCC1 under voltage reset) to bring the microcontroller into a defined state via a reset. Once the failure condition is not present anymore the device will automatically change to SBC Normal Mode after a delay time (t_{RD1} or t_{RD2}).
- SBC Fail-Safe Mode: A safe-state mode after critical failures (e.g. WD failure, VCC1 under voltage reset) to bring the system into a safe state and to ensure a proper restart of the system. VCC1 is disabled. It is a permanent state until either a wake event (via CAN, WK/VSENSE or GPIO configured as wake) occurs or the over temperature condition is not present anymore.

A special mode, called SBC Development Mode, is available during software development or debugging of the system. All above mentioned operating modes can be accessed in this mode. However, the watchdog counter is stopped and does not need to be triggered. In addition, CAN is set to normal mode and VCC2 is on. This mode can be accessed by connecting the TEST pin to VCC1 during SBC Init Mode.

The device can be configured via hardware (external component) to determine the device behavior after a watchdog trigger failure. See Chapter 5.1.1 for further information.

The System Basis Chip is controlled via a 16-bit SPI interface. A detailed description can be found in Chapter 13.The configuration as well as the diagnosis is handled via the SPI. The SPI mapping of the TLE9471-3ES is compatible to other devices of the TLE926x and TLE927x families.

The device offers various supervision features to support functional safety requirements. Please see Chapter 12 for more information.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

5.1 Block Description of State Machine

The different SBC Modes are selected via SPI by setting the respective SBC **MODE** bits in the register **M_S_CTRL**. The SBC **MODE** bits are cleared when going through SBC Restart Mode and thus always show the current SBC mode.

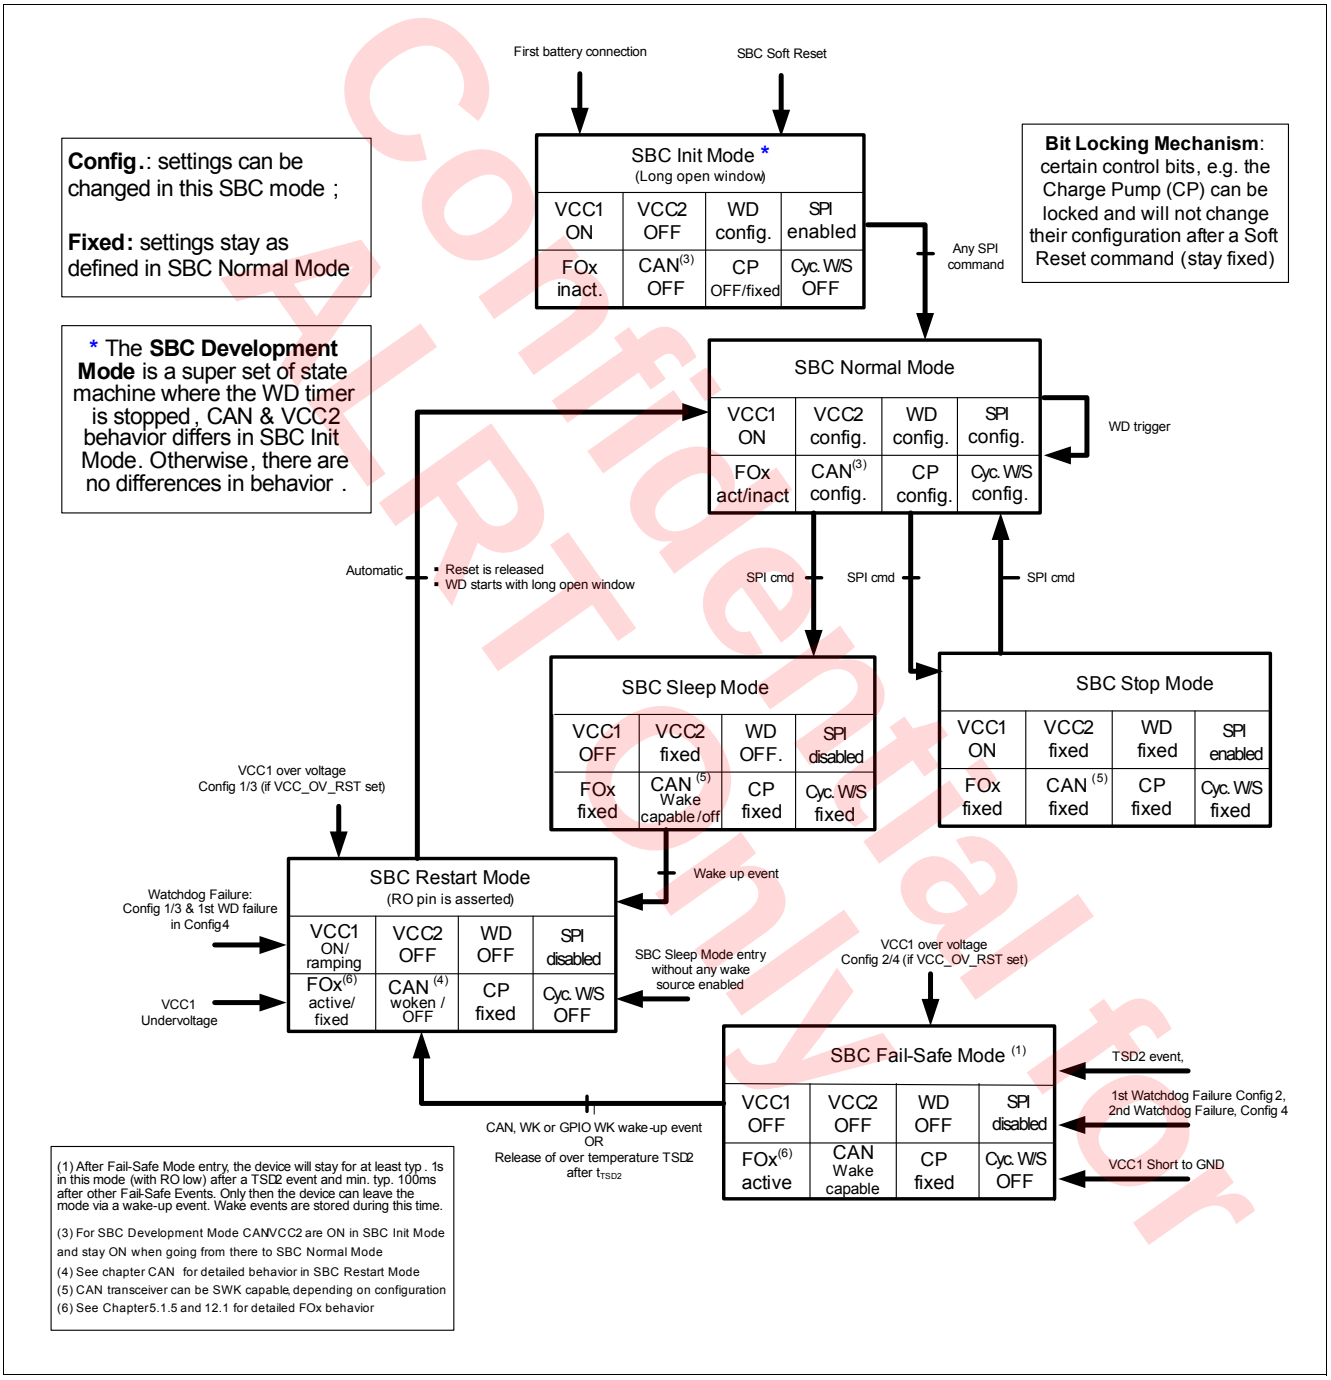

Figure 3 State Diagram showing the SBC Operating Modes including CAN Partial Networking (SWK)

Confidential for ALRT Only

5.1.1 Device Configuration and SBC Init Mode

The SBC starts up in SBC Init Mode after crossing the power-on reset $V_{POR,r}$ threshold (see also Chapter 12.3) and the watchdog will start with a long open window (t_{LW}) after RSTN is released (High level).
During this power-on phase following configurations are stored in the device:

- The device behavior regarding a watchdog trigger failure and a VCC1 over voltage condition is determined by the external circuitry on the INTN pin (see below)
- The selection of the normal device operation or the SBC Development Mode (watchdog disabled CAN = on, VCC2 = on for debugging purposes) will be set depending on the voltage level of the TEST pin (see also Chapter 5.1.7).

5.1.1.1 Device Configuration

The configuration selection is intended to select the SBC behavior due to a watchdog trigger failure and VCC1 overvoltage detection. Depending on the requirements of the application, the VCC1 output shall be switched OFF and the device shall go to SBC Fail-Safe Mode in case of a watchdog failure (1 or 2 fails). To set this configuration (Config 2/4), the INTN pin does not need an external pull-up resistor. In case VCC1 should not be switched OFF (Config 1/3), the INTN pin needs to have an external pull-up resistor connected to VCC1 (see application diagram in Chapter 14).
Figure 4 shows the timing diagram of the hardware configuration selection. The hardware configuration is defined during SBC Init Mode. The INTN pin is internally pulled LOW with a weak pull-down resistor during the reset delay time t_{RD1}, i.e.after VCC1 crosses the reset threshold VRT1 and before the RSTN pin goes HIGH. The INTN pin is monitored during this time (with a continuos filter time of t_{CFG_F}) and the configuration (depending on the voltage level at INTN) is stored at the rising edge of RSTN.

Note: If the POR bit is not cleared then the internal pull-down resistor at INTN will be reactivated every time RSTN is pulled LOW the configuration will be updated at the rising edge of RSTN. Therefore it is recommended to clear the POR bit right after initialization. In case there is no stable signal at INTN, then the last filtered value will be taken. If no filtered value is taken then the default value '0' will be taken as the config select value = SBC Fail-Safe Mode.

Note: During device power up, the SPI status bits VCC1_ WARN, VCC1_UV and VS_UV will only be updated once RSTN is released after the reset delay time.

Confidential for ALRT Only

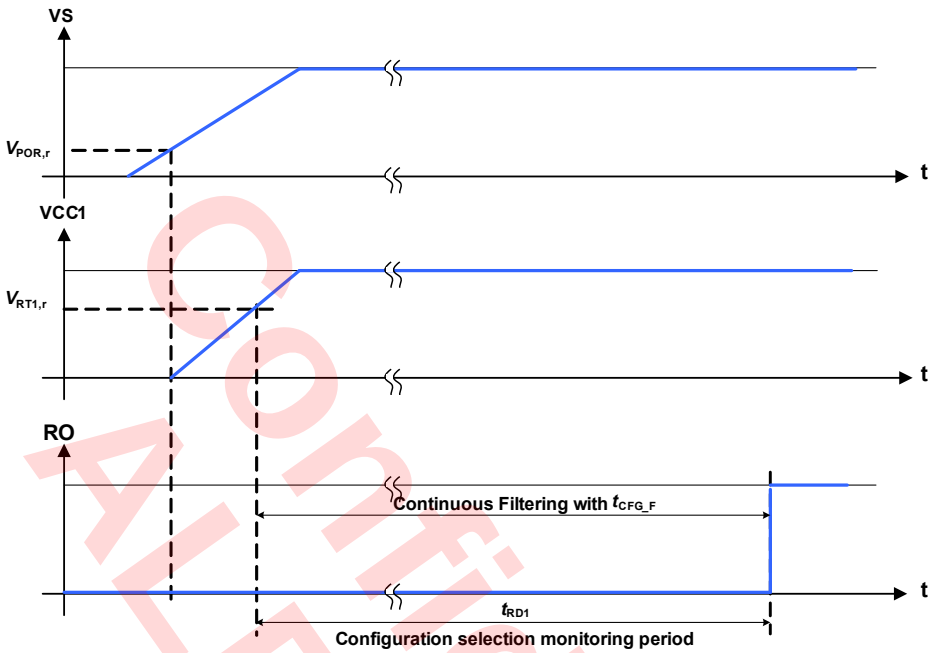

Figure 4 Hardware Configuration Selection Timing Diagram

There are four different device configurations (Table 5) available defining the watchdog failure and the VCC1 over voltage behavior. The configurations can be selected via the external connection on the INTN pin and the SPI bit CFG1 in the HW_CTRL_0 register (see also Chapter 13.4):

- CFG0_STATE = '1': Config 1 and Config 3:
  - A watchdog trigger failure leads to SBC Restart Mode and depending on CFG1 the Fail Output (FO) is activated after the 1st (Config 1) or 2nd (Config 3) watchdog trigger failure;
  - A VCC1 over voltage detection will lead to SBC Restart Mode if VCC1_OV_RST is set. VCC1_ OV will be set and the Fail Output is activated;
- CFG0_STATE = '0': Config 2 and Config 4:
  - A watchdog trigger failure leads to SBC Fail-Safe Mode and depending on CFG1 the Fail Output (FO) is activated after the 1st (Config 2) or 2nd (Config 4) watchdog trigger failure. The first watchdog trigger failure in Config 4 will lead to SBC Restart Mode;
  - A VCC1 over voltage detection will lead to SBC Fail-Safe Mode if VCC1_OV_RST is set. VCC1_ OV will be set and the Fail Output is activated;

The respective device configuration can be identified by reading the SPI bit CFG1 in the HW_CTRL_0 register and the CFG0_STATE bit in the WK_LVL_STAT register.

Table 5 shows the configurations and the device behavior in case of a watchdog trigger failure:

Confidential for ALRT Only

Confidential for ALRT Only

Table 5 Watchdog Trigger Failure Configuration

Config	INTN Pin (CFG0_STATE)	SPI Bit CFG1	Event	FO Activation	SBC Mode Entry
1	External pull-up	1	1 x Watchdog Failure	after 1st WD Failure	SBC Restart Mode
2	No ext. pull-up	1	1 x Watchdog Failure	after 1st WD Failure	SBC Fail-Safe Mode
3	External pull-up	0	1 & 2 x Watchdog Failure	after 2nd WD Failure	SBC Restart Mode
4	No ext. pull-up	0	2 x Watchdog Failure	after 2nd WD Failure	SBC Fail-Safe Mode[1)]

1) SBC Restart Mode is entered after the 1. watchdog failure. The 2nd watchdog failure will lead to SBC Fail-Safe Mode

Table 6 shows the configurations and the device behavior in case of a VCC1 over voltage detection when VCC1_OV_RST is set:

Table 6 Device Behavior in Case of VCC1 Over Voltage Detection

Config	INTN Pin (CFG0_STATE)	CFG1 Bit	VCC1_OV_RST	Event	VCC1_OV	FO Activation	SBC Mode Entry
1-4	any value	x	0	1 x VCC1 OV	1	no FO activation	unchanged
1	External pull-up	1	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Restart Mode
2	No ext. pull-up	1	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Fail-Safe Mode
3	External pull-up	0	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Restart Mode
4	No ext. pull-up	0	1	1 x VCC1 OV	1	after 1st VCC1 OV	SBC Fail-Safe Mode

The respective configuration will be stored for all conditions and can only be changed in SBC Init Mode when RSTN is ‘Low’ or by powering down the device (VS < $V_{POR,f}$) assuming the bit POR is cleared right after device power up (see also not on Page 21).

Confidential for ALRT Only

Confidential for ALRT Only

5.1.1.2 SBC Init Mode

In SBC Init Mode, the device waits for the microcontroller to finish its startup and initialization sequence.

The SBC starts with a long open watchdog window (see also **Chapter 12.2**).

All diagnosis functions which are by default enabled at device power-up are active.

While in SBC Init Mode any valid SPI command (from the SPI protocol, i.e. 16-bit or 32-bit word) will bring the SBC to SBC Normal Mode, i.e. any register can be written, cleared and read. During the long open window the watchdog has to be triggered. Thereby the watchdog will be automatically configured.

A missing watchdog trigger during the long open window will cause a watchdog failure and the device will enter SBC Restart Mode.

Wake events are ignored during SBC Init Mode and will therefore be lost.

A SBC Soft Reset command (**MODE** = '11') will bring the SBC back into SBC Init Mode and the SPI registers will be changed to their respective Soft Reset values. In case one or both lock bits are set (**CFG_LOCK_0** or **CFG_LOCK_1**) then the locked bits will keep their previous values and will not change. The lock bits will keep their values.

Note: Any SPI command will bring the SBC to SBC Normal Mode even if it is a illegal SPI command (see Chapter 13.2).

Note: For a safe start-up, it is recommended to use the first SPI command to trigger and to configure the watchdog (see Chapter 12.2).

Note: At power up, the SPI bitVCC1_UV will not be set nor will FO be triggered as long as VCC1 is below the $V_{RT,x}$ threshold and if VS is below the $V_{S,UV}$ threshold. The RSTN pin will be kept low as long as VCC1 is below the selected $V_{RT,x}$ threshold and the reset delay time has not expired. After the first threshold crossing of VCC1 > Vrt1,r and RSTN transition from low to high, all subsequent undervoltage events will lead to SBC Restart Mode.

Note: The bit VS_UV will only be updated in SBC INIT Mode once RSTN resumes a high level.

Confidential for ALRT Only

5.1.2 SBC Normal Mode

The SBC Normal Mode is the standard operating mode for the SBC. All configurations have to be done in SBC Normal Mode before entering a low-power mode (see also Chapter 5.1.6 for the device configuration defining the Fail-Safe Mode behavior). A wake-up event on CAN, WK/VSENSE, FO/GPIO configured as wake input, Timer1 will create an interrupt on pin INTN - however, no change of the SBC mode will occur. The configuration options are listed below:

- VCC1 is active
- VCC2 can be switched ON or OFF (default = OFF)
- CAN is configurable (OFF coming from SBC Init Mode; OFF or wake capable coming from SBC Restart Mode, see also Chapter 5.1.5)
- WK/VSENSE pin shows the input level and can be selected to be wake capable (interrupt), the alternative measurement function with the voltage output at FO/GPIO can be activated by setting WK_MEAS
- Cyclic sense can be configured with the HS function of the GPIO (GPIO = '011'), WK/VSENSE input and Timer1
- Cyclic wake can be configured with the Timer
- Watchdog is configurable
- The Charge Pump Output can switched ON or OFF (default = OFF)
- The FO/GPIO output is inactive by default. Coming from SBC Restart Mode FO can be active (due to a failure event, e.g. watchdog trigger failure, VCC1 short circuit, etc.) or inactive (no failure occurred) if configured as FO
- GPIO is configurable and is controlled by PWM; GPIO is OFF coming from SBC Restart Mode

Certain SPI control bits with the bit type 'rwl' can be protected against unintentional modification by setting the CFG_LOCK_1 bit in the register HW_CTRL_2. The locking mechanism stays activated until the device is powered down (VS < $V_{POR,f}$). The charge pump and GPIO configuration can also be locked by setting the CFG_LOCK_0 bit in the register HW_CTRL_1. The lock can be always reset in SBC Normal Mode.

In SBC Normal Mode, there is the possibility of testing the FO output, i.e. to verify if setting the FO/GPIO pin to LOW will create the intended behavior within the system. The FO output can be enabled and then disabled again by the microcontroller by setting the FO_ON SPI bit. This feature is only intended for testing purposes.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.1.3 SBC Stop Mode

The SBC Stop Mode is the first level technique to reduce the overall current consumption by setting the voltage regulators VCC1, VCC2 into a low-power mode. In this mode VCC1 is still active and supplying the microcontroller, which can enter a power-down mode. The VCC2 supply can be configured to stay enabled and CAN to stay in Normal Mode. All settings have to be done before entering SBC Stop Mode. In SBC Stop Mode any kind of SPI WRITE commands are ignored and the SPI_FAIL bit is set, except for changing to SBC Normal Mode, triggering a SBC Soft Reset, refreshing the watchdog as well as for reading and clearing the SPI status registers. A wake-up event on CAN, WK/VSENSE, FO/GPIO if configured as wake input and Timer1 will create an interrupt on pin INTN - however, no change of the SBC mode will occur. The configuration options are listed below:

- VCC1 is ON
- VCC2 is fixed as configured in SBC Normal Mode
- CAN mode is fixed as configured in SBC Normal Mode
- WK/VSENSE pin is fixed as configured in SBC Normal Mode
- Cyclic sense is fixed as configured in SBC Normal Mode
- Cyclic wake is fixed as configured in SBC Normal Mode
- Watchdog is fixed as configured in SBC Normal Mode
- SBC Soft Reset can be triggered
- The Charge Pump state os fixed as configured in SBC Normal Mode
- FO output is fixed if configured as FO, i.e. the state from SBC Normal Mode is maintained unless it is changed by the software, i.e. by clearing the FAILURE bit and triggering the watchdog properly
- GPIO is fixed as configured in SBC Normal Mode

An interrupt is triggered on the pin INTN when SBC Stop Mode is entered and not all wake source signalization flags from WK_STAT_0 and WK_STAT_1 were cleared.

Note: If outputs are kept enabled during SBC Stop Mode, e.g. HS of GPIO, then the SBC current consumption will increase (see Chapter 4.4).

Note: It is not possible to switch directly from SBC Stop Mode to SBC Sleep Mode. Doing so will also set the SPI_FAIL flag and will bring the SBC into Restart Mode.

Note: When WK/VSENSE and FO/GPIO are configured for the alternate measurement function (WK_MEAS = 1) then the pins cannot be selected as wake input sources.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.1.4 SBC Sleep Mode

The SBC Sleep Mode is the second level technique to reduce the overall current consumption to a minimum needed to react on wake-up events or for the SBC to perform autonomous actions (e.g. cyclic sense). In this mode, VCC1 is OFF and not supplying the microcontroller anymore. The VCC2 supply can be configured to stay enabled. The settings have to be done before entering SBC Sleep Mode. A wake-up event on CAN, WK/VSENSE, FO/GPIO if configured as wake input and Timer1 will bring the device via SBC Restart Mode into SBC Normal Mode again and signal the wake source. The configuration options are listed below:

- VCC1 is OFF
- VCC2 is fixed as configured in SBC Normal Mode
- CAN mode changes automatically from ON or Receive Only Mode to wake capable mode or can be selected to be OFF
- WK/VSENSE pin is fixed as configured in SBC Normal Mode
- Cyclic sense is fixed as configured in SBC Normal Mode
- Cyclic wake is fixed as configured in SBC Normal Mode, it can be the only activated wake source
- Watchdog is OFF
- The Charge Pump state is fixed as configured in SBC Normal Mode
- FO output is fixed if configured as FO, i.e. the state from SBC Normal Mode is maintained
- GPIO is fixed as configured in SBC Normal Mode, it can be the only wake source if configured as WK/VSENSE
- As VCC1 is OFF during SBC Sleep Mode, no SPI communication is possible;
- SPI communication is disabled because VCC1 is OFF
- The Sleep Mode entry is signalled in the SPI register **DEV_STAT** with the bit **DEV_STAT**

It is not possible to switch off all wake sources in SBC Sleep Mode. Doing so will set the **SPI_FAIL** flag and will bring the SBC into SBC Restart Mode.

In order to enter SBC Sleep Mode successfully, all wake source signalization flags from **WK_STAT_0** and **WK_STAT_1** need to be cleared. A failure to do so will result in an immediate wake-up from SBC Sleep Mode by going via SBC Restart to Normal Mode.

All settings must be done before entering SBC Sleep Mode.

Note: If outputs are kept enabled during SBC Sleep Mode, e.g. HS of GPIO, then the SBC current consumption will increase (see Chapter 4.4).

Note: The Cyclic Sense function might not work properly anymore in case of a failure event (e.g. overcurrent, over temperature, reset) because the configured HS of the GPIO and Timer might be disabled.

Note: When WK/VSENSE and FO/GPIO are configured for the alternate measurement function (WK_MEAS = 1) then the pins cannot be selected as wake input sources.

Confidential for ALRT Only

5.1.5 SBC Restart Mode

There are multiple reasons to enter the SBC Restart Mode. The purpose of the SBC Restart Mode is to reset the microcontroller:

- in case of under voltage on VCC1 in SBC Normal and SBC Stop Mode and SBC Init Mode after RSTN has been released,
- in case of over voltage on VCC1 if the bit VCC1_OV_RST is set and if CFG0_STATE = '1',
- due to 1st incorrect Watchdog triggering (only if Config1, Config3 or Config 4 is selected, otherwise SBC Fail-Safe Mode is immediately entered),
- In case of a wake event from SBC Sleep or SBC Fail-Safe Mode or a release of over temperature shutdown (TSD2) out of SBC Fail-Safe Mode this transition is used to ramp up VCC1 after a wake in a defined way.

From SBC Restart Mode, the SBC goes automatically to SBC Normal Mode, i.e the mode is left automatically by the SBC without any microcontroller influence. The SBC MODE bits are cleared. As shown in Figure 37 the Reset Output (RSTN) is pulled low when entering Restart Mode and is released at the transition to Normal Mode after the reset delay time (t_{RD1}). The watchdog timer will start with a long open window starting from the moment of the rising edge of RSTN and the watchdog period setting in the register WD_CTRL will be changed to the respective default value '100'.

Leaving the SBC Restart Mode will not result in changing / deactivating the Fail Output.

The behavior of the blocks is listed below:

- FO (if configured as FO) is activated in case of a 1st watchdog trigger failure for Config1 or a 2nd watchdog failure for Config3 or in case of VCC1 over voltage detection (if VCC1_OV_RST is set)
- VCC1 is ON or ramping up
- VCC2 will be disabled if it was activated before
- CAN is "woken" due to a wake event or OFF depending on previous SBC and transceiver mode (see also Chapter 8). It is wake capable when it was in CAN Normal-, Receive Only or wake capable mode before SBC Restart Mode
- GPIO behavior: switched OFF if configured as LS or HS, see also Chapter 11.1.2
- RSTN is pulled low during SBC Restart Mode
- SPI communication is ignored by the SBC, i.e. it is not interpreted
- The Restart Mode entry is signalled in the SPI register DEV_STAT with the bits DEV_STAT

Table 7 Reasons for Restart - State of SPI Status Bits after Return to Normal Mode

Prev. SBC Mode	Event	DEV_STAT	WD_FAIL	VCC1_UV	VCC1_OV	VCC1_SC
Normal	1x Watchdog Failure	01	01	x	x	x
Normal	2x Watchdog Failure	01	10	x	x	x
Normal	VCC1 under voltage reset	01	xx	1	x	x
Normal	VCC1 over voltage reset	01	xx	x	1	x
Stop	1x Watchdog Failure	01	01	x	x	x
Stop	2x Watchdog Failure	01	10	x	x	x
Stop	VCC1 under voltage reset	01	xx	1	x	x
Stop	VCC1 over voltage reset	01	xx	x	1	x
Sleep	Wake-up event	10	xx	x	x	x
Fail-Safe	Wake-up event	01	see "Reasons for Fail Safe, Table 8"			

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Note: An over voltage event on VCC1 will only lead to SBC Restart Mode if the bit VCC1_OV_RST is set and if CFG0_STATE = '1' (Config 1/3).

Note: The content of the WD_FAIL bits will depend on the device configuration, e.g. 1 or 2 watchdog failures.

5.1.6 SBC Fail-Safe Mode

The purpose of this mode is to bring the system in a safe status after a failure condition by turning off the VCC1 supply and powering off the microcontroller. After a wake event the system is then able to restart again.

The Fail-Safe Mode is automatically reached for following events:

- after an SBC thermal shutdown (TSD2) (see also Chapter 12.8.3),
- in case of over voltage on VCC1 if the bit VCC1_OV_RST is set and if CFG0_STATE = '0',
- after a 1st incorrect watchdog trigger in Config2 (CFG1 = 1) and after a 2nd incorrect watchdog trigger in Config4 (CFG1 = 0) (see also Chapter 5.1.1),
- if VCC1 is shorted to GND (see also Chapter 12.6),

In this case, the default wake sources CAN, WK/VSENSE and FO/GPIO if configured as wake input (see also registers BUS_CTRL_0, WK_CTRL_1 and GPIO_CTRL) are activated, the wake events are cleared in the register WK_STAT_0 and WK_STAT_1, and both voltage regulators and the GPIO - if configured as HS or LS - are switched off. The SBC Fail-Safe Mode is entered regardless if FO is configured as FO or GPIO. When WK/VSENSE and FO/GPIO are configured for the alternate measurement function (WK_MEAS = 1) then the pins will stay configured for the measurement function when SBC Fail-Safe Mode is entered, i.e. they will not automatically be activated as wake sources.

The SBC Fail-Safe Mode will be maintained until a wake event on the default wake sources occurs. To avoid any fast toggling behavior a filter time of typ. 100ms ($t_{FS,min}$) is implemented. Wake events during this time will be stored and will automatically lead to entering SBC Restart Mode after the filter time.
In case of an VCC1 over temperature shutdown (TSD2) the SBC Restart Mode will be reached automatically after a filter time of typ. 1s (t_{TSD2}) without the need of a wake event once the device temperature has fallen below the TSD2 threshold. Please see Chapter 12.8.3 for extending the minimum TSD2 waiting time.
Leaving the SBC Fail-Safe Mode will not result in deactivation of the Fail Output pins.

The following functions are influenced during SBC Fail-Safe Mode:

- FO output (if configured as FO) is activated (see also Chapter 11)
- VCC1 is switched OFF
- VCC2 is switched OFF
- CAN is set to wake capable
- GPIO behavior:
  - if configured as HS or LS: it is switched OFF
  - if configured as wake input: it is set to wake capable through static sense
- WK/VSENSE pin is set to wake capable through static sense (only if WK_MEAS = 0)
- Cyclic sense and Cyclic wake is disabled
- SPI communication is disabled because VCC1 is OFF
- The Fail-Safe Mode activation is signalled in the SPI register DEV_STAT with the bits FAILURE and DEV_STAT

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 8 Reasons for Fail-Safe - State of SPI Status Bits after Return to Normal Mode

Prev. SBC Mode	Failure Event	DEV_ STAT	TSD2	WD_ FAIL	VCC1_ UV	VCC1_ OV	VCC1_ SC
Normal	1 x Watchdog Failure	01	x	01	x	x	x
Normal	2 x Watchdog Failure	01	x	10	x	x	x
Normal	TSD2	01	1	xx	x	x	x
Normal	VCC1 short to GND	01	x	xx	1	x	1
Normal	VCC1 over voltage	01	x	xx	x	1	x
Stop	1 x Watchdog Failure	01	x	01	x	x	x
Stop	2 x Watchdog Failure	01	x	10	x	x	x
Stop	TSD2	01	1	xx	x	x	x
Stop	VCC1 short to GND	01	x	xx	1	x	1
Stop	VCC1 over voltage	01	x	xx	x	1	x

Note: An over voltage event on VCC1 will only lead to SBC Fail-Safe Mode if the bit VCC1_OV_RST is set and if CFG0_STATE = '0' (Config 2/4).

Note: The content of the WD_FAIL bits will depend on the device configuration, e.g. 1 or 2 watchdog failures.

5.1.7 SBC Development Mode

The SBC Development Mode is used during the development phase of the module. It is especially useful for software development.

Compared to the default SBC user mode operation, this mode is a super set of the state machine. The device will start also in SBC Init Mode and it is possible to use all the SBC Modes and functions with following differences:

- Watchdog is stopped and does not need to be triggered. Therefore no reset is triggered due to watchdog failure
- SBC Fail-Safe and SBC Restart Mode are not reached due to watchdog failure but the other reasons to enter these modes are still valid
- CAN and VCC2 default value in SBC INIT MODE and entering SBC Normal Mode from SBC Init Mode is ON instead of OFF

The SBC Development Mode is reached automatically if the TEST pin is set HIGH (i.e. connected to VCC1 with (5V level) during SBC Init Mode. The voltage level monitoring is started as soon as VS > $V_{POR,r}$ and VCC1 > $V_{RT1,r}$. The SBC Development Mode is set and maintained if SBC Init Mode is left by sending any SPI command while TEST is HIGH. The bit SBC_DEV _LVL is showing the status of the SBC Development Mode.
The Test pin has an integrated pull-down resistor R_{TEST} (switched ON only during SBC Init Mode) to prevent an unintentional SBC Development Mode entry (see also Figure 5).

Note: The integrated pull-down resistor is disabled only if the SBC Development Mode was entered successfully, i.e. not when the SBC Init Mode is left with an error (watchdog failure, VCC1 undervoltage reset, etc).

Note: In case an VCC2 overtemperature event occurs in SBC Init Mode after SBC Development Mode is entered, then VCC2 is shut down for device protection reasons.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

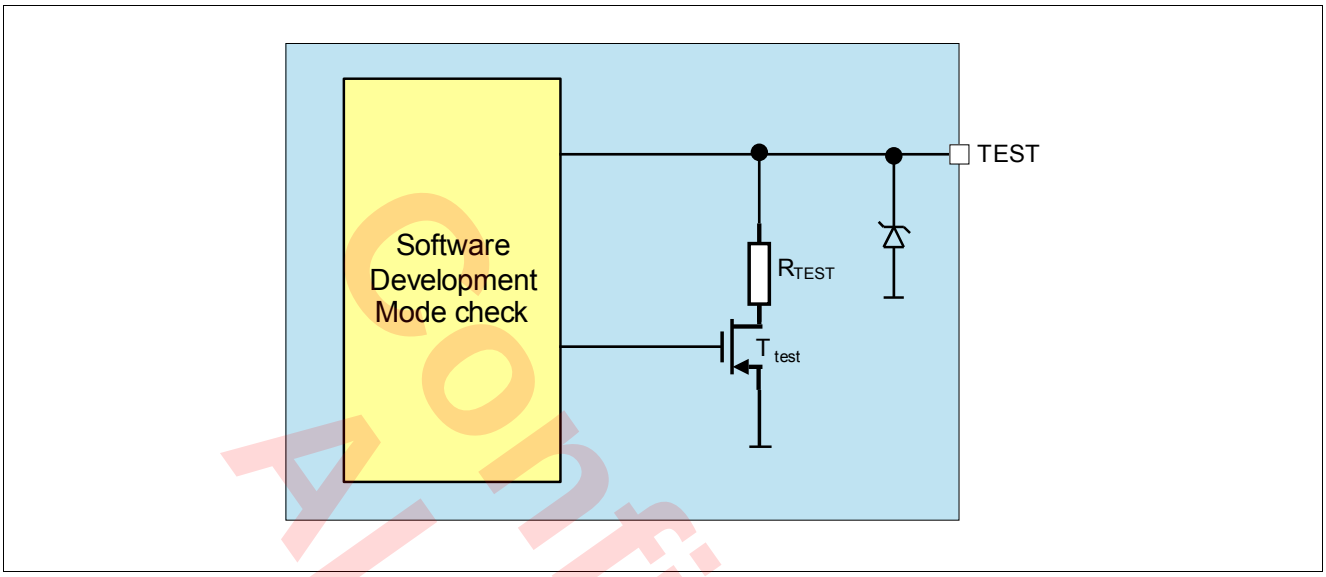

Figure 5 Block Diagram of Pin TEST for SBC Development Mode Detection

In case the pin level will toggle with a period higher than t_{TEST} during the monitoring period then the SBC Development Mode is not reached .

The SBC will remain in this mode for all conditions and can only be left by powering down the device (VS < $V_{POR,f}$).

Note: If the SBC enters SBC Fail-Safe Mode due to VCC1 short circuit to GND during the SBC INIT Mode the SBC Development will not be entered and can only be reached at the next power-up of the SBC after the VCC1 short circuit is removed.

Note: The absolute maximum ratings of the pin TEST must be observed. To increase the robustness of this pin during debugging or programming a series resistor between TEST and the connector can be added (see Figure 53).

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.1.8 Electrical Characteristics for Pin TEST

Table 9 Electrical Characteristics[1)]

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Pull-down Resistance at pin TEST	R_{TEST}	7	10	13	kΩ	[2)] V_{TEST} = V_{CC1}; SBC Init Mode;	P_5.1.1
TEST Input Filter Time	t_{TEST}	51	64	80	µs	[3)]	P_5.1.2
TEST High Input Voltage Threshold	$V_{TEST,IH}$	–	–	0.7* V_{CC1}	V	[2)]	P_5.1.3
TEST Low Input Voltage Threshold	$V_{ITEST,IL}$	0.3* V_{CC1}	–	–	V	[2)]	P_5.1.4
TEST Hysteresis of Input Voltage	$V_{TEST,IHY}$	–	0.12* V_{CC1}	–	V	[2)]	P_5.1.5

1) The external capacitance on the TEST pin must be limited to less than 10nF to ensure proper detection of SBC Development Mode and SBC User Mode operation.
2) Not subject to production test, specified by design.
3) Not subject to production test, tolerance defined by internal oscillator tolerance.

Confidential for ALRT Only

5.2 Wake Features

Following wake sources are implemented in the device:

- Static Sense: WK/VSENSE input and/or GPIO WK input are permanently active as a wake source, i.e WK_EN is set and/or FO/GPIO is enabled as wake input (see Chapter 9.2.2 & Chapter 11.1.3)
- Cyclic Sense: WK/VSENSE input only active during on-time of cyclic sense period. Internal timer is activating GPIO HS during on-time for sensing the WK/VSENSE input (see Chapter 5.2.1)
- Cyclic Wake: wake controlled by internal timer, wake inputs are not used for cyclic wake (see Chapter 5.2.2)
- CAN wake: Wake-up via CAN message, i.e. CAN wake-up pattern (WUP, see also Chapter 8) or CAN wake-up frame (WUF, see also Chapter 5.6)

5.2.1 Cyclic Sense

The cyclic sense feature is intended to reduce the quiescent current of the device and the application.
In the cyclic sense configuration, GPIO configured as high-side driver is switched on periodically controlled by TIMER_CTRL. The high-side driver supplies external circuitries e.g. switches and/or resistor arrays, which are connected to the wake input WK (see Figure 6). Any edge change of the WK/VSENSE input signal during the on-time of the cyclic sense period causes a wake. Depending on the SBC mode, either the INTN is pulled low (SBC Normal Mode and Stop Mode) or the SBC is woken enabling the VCC1 (after SBC Sleep Mode).

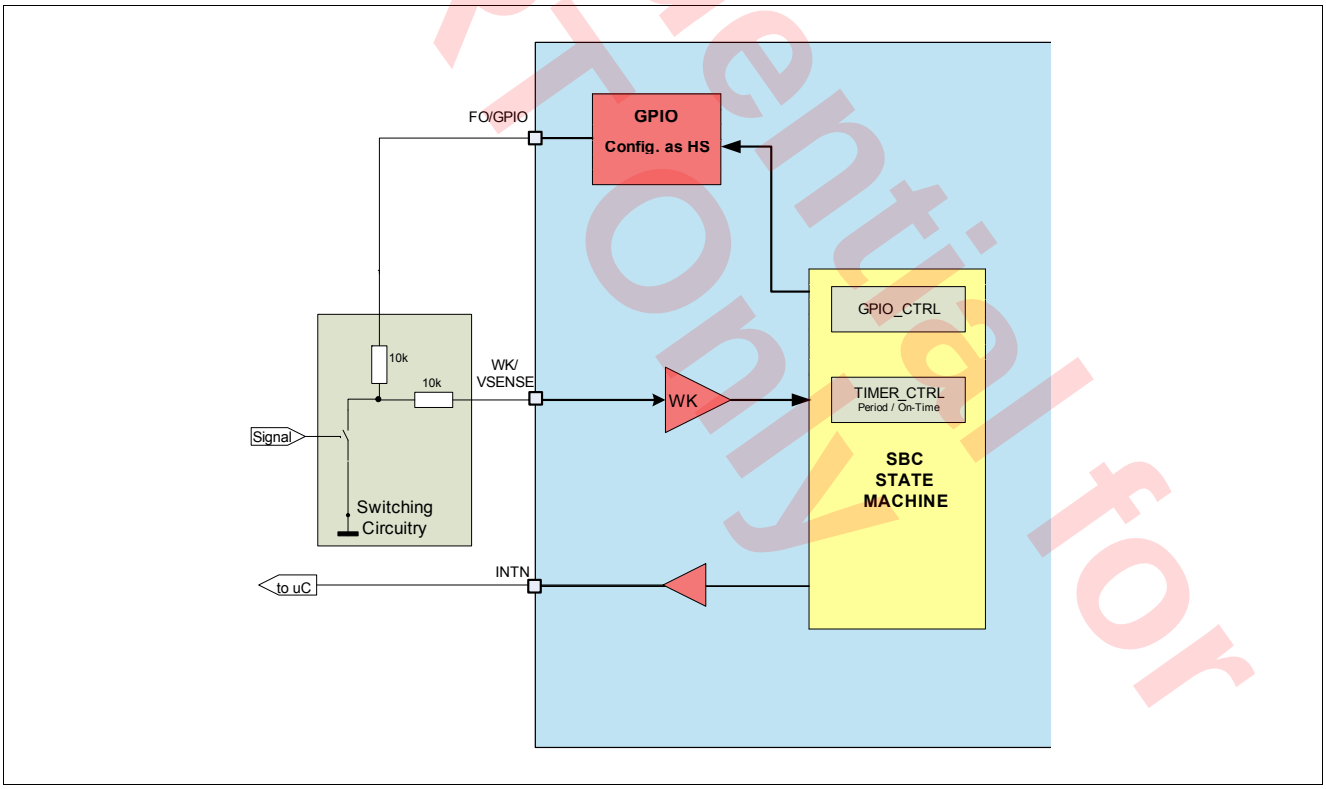

Figure 6 Cyclic Sense Working Principle

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

5.2.1.1 Configuration and Operation of Cyclic Sense

The correct sequence to configure the cyclic sense is shown in Figure 7. All the configurations have to be performed before the on-time is set in the TIMER_CTRL registers.

Cyclic Sense (=Timer) will start as soon as the respective on-time has been selected independently from the assignment of the HS and filter configuration. The correct configuration sequence is as follows:

- Configuring GPIO as HS with cyclic sense functionality
- Enabling WK/VSENSE as wake source
- Selecting the pull-up/down configuration, all configurations are valid for cyclic sense, recommended is the automatic pull-up / down selection
- Configuring the timer period and on-time

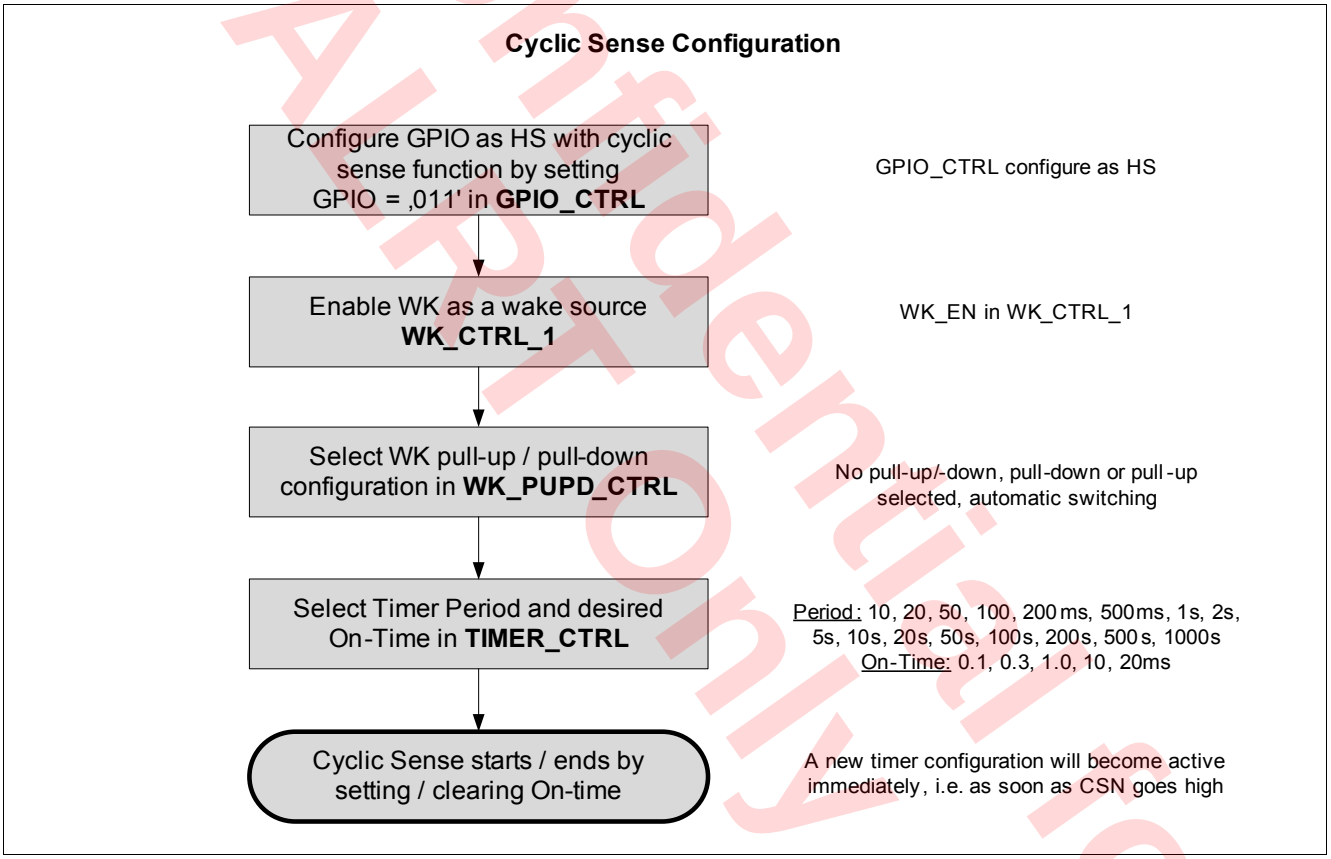

Figure 7 Cyclic Sense: Configuration and Sequence

Note: If the sequence is not ensured then the cyclic sense function might not work properly, e.g. an interrupt could be missed or an unintentional interrupt could be triggered. However, if cyclic sense is the only wake source and it is not configured properly (e.g. Timer not yet set) then entering SBC Sleep Mode, then SBC Restart Mode will be entered immediately because no valid wake source was set.

Note: All configurations of period and on-time can be selected. However, recommended on-times for cyclic sense are 0.1ms, 0.3ms and 1ms for quiescent current saving reasons. The SPI_FAIL will be set if the on-time is longer than the period.

Note: A learning cycle is started every time when the timer is started via the on-time and GPIO is configured as HS with cyclic sense = ‘011, i.e. the cyclic sense function is enabled.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

The first sample of the WK/VSENSE input value (HIGH or LOW) is taken as the reference for the next cycle. If a change of the WK/VSENSE input level is detected during the on-time of the second or later cycle then a a wake-up from SBC Sleep Mode or an interrupt during SBC Normal or SBC Stop Mode will be triggered.

A filter time of 16µs is implemented to avoid a parasitic wake-up due to transients or EMC disturbances. The filter time t_{FWK1} is triggered right at the end of the selected on-time and a wake signal is recognized if:

- there was an input level change (crossing the switching threshold level V_{WKth}) between the current and previous cycle and
- the input level did not change during the filter time

A wake event due to cyclic sense will also set the bit WK_WU.

During Cyclic Sense, WK_LVL_STAT is updated only with the sampled voltage levels of the WK/VSENSE pin in SBC Normal or SBC Stop Mode.

The functionality of the sampling and different scenarios are depicted in Figure 8 to Figure 10. The behavior in SBC Stop and SBC Sleep Mode is identical except that in SBC Normal and Stop Mode INTN will be triggered to signal a change of WK/VSENSE input level and in SBC Sleep Mode, VCC1 will power-up instead. A wake event will be triggered regardless if the bit WK_WU is already set.

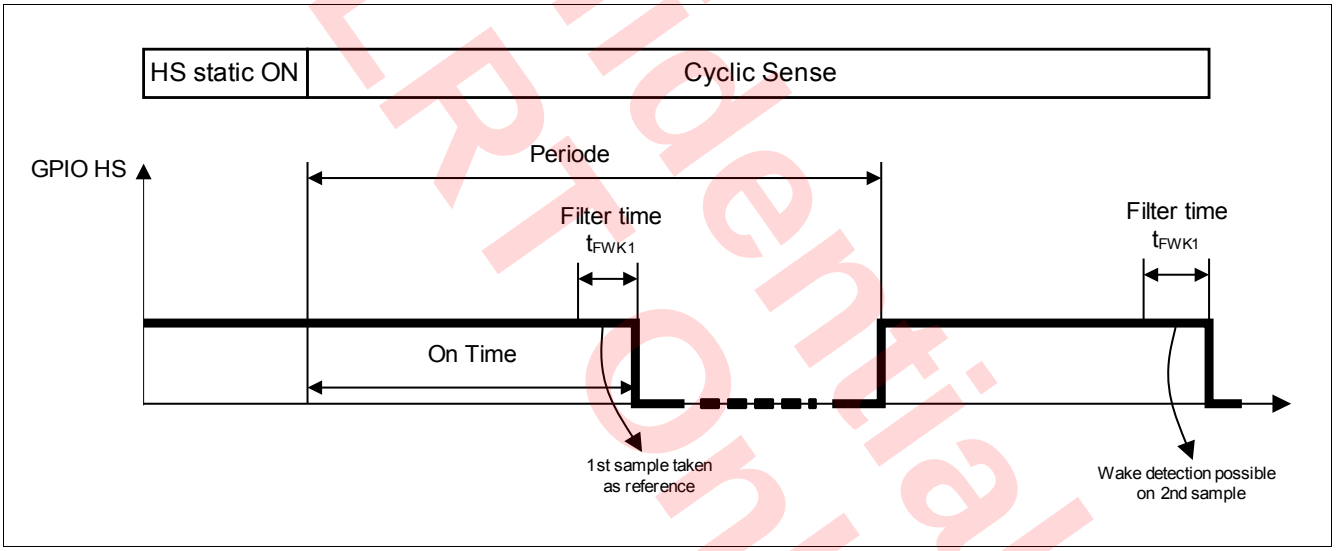

Figure 8 Cyclic Sense Timing

Confidential for ALRT Only

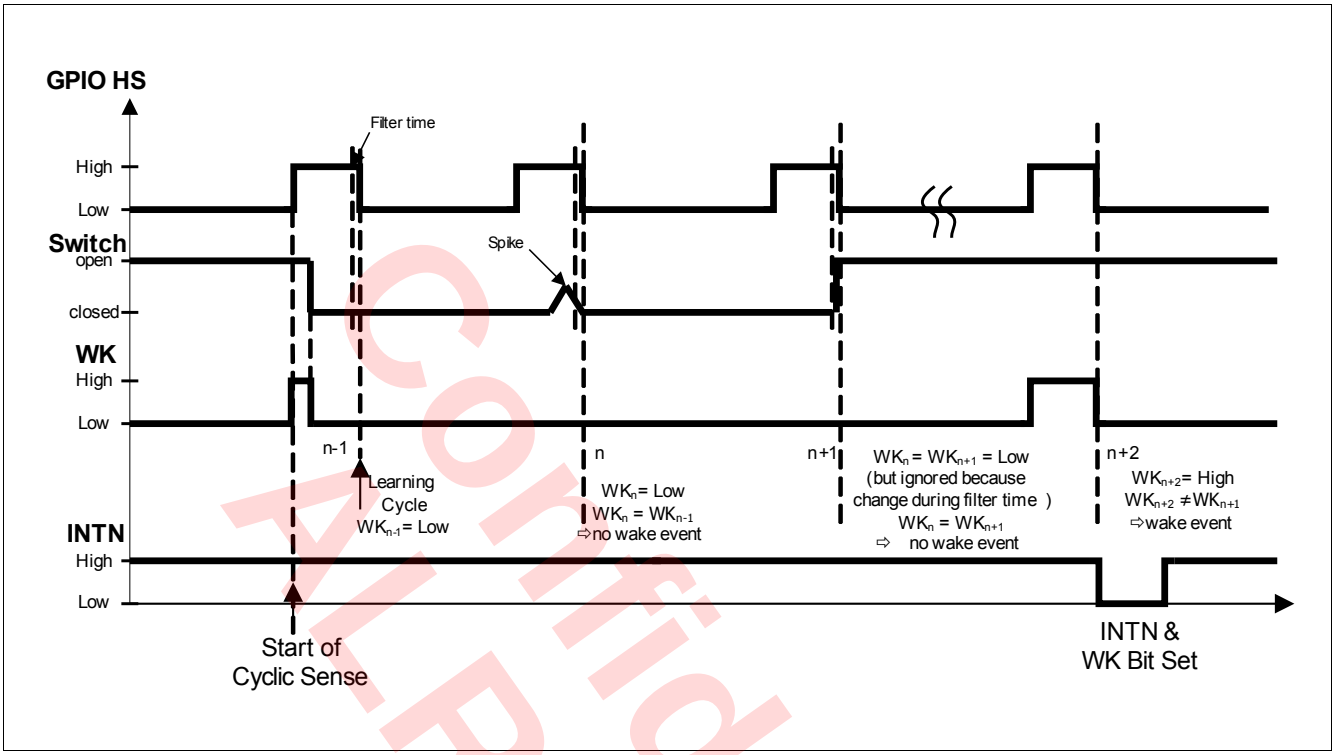

Figure 9 Cyclic Sense Example Timing for SBC Stop Mode, HS starts LOW, GND based WK/VSENSE input

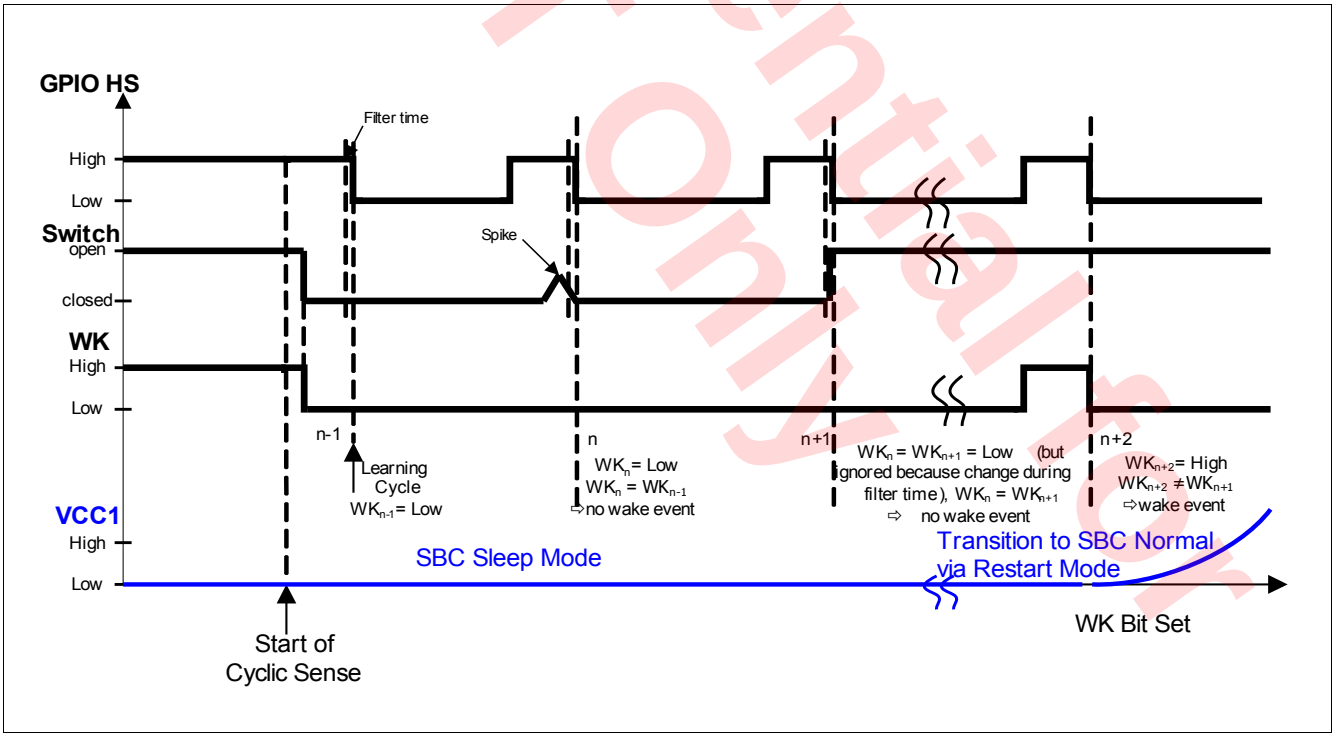

Figure 10 Cyclic Sense Example Timing for SBC Sleep Mode, HS starts with ON, GND based WK/VSENSE input

The cyclic sense function will be disabled in case of following conditions (WK/VSENSE will be automatically switched to static sense):

Confidential for ALRT Only

Confidential for ALRT Only

- in case SBC Fail-Safe Mode is entered: The HS GPIO switch will be disabled and the wake pin will be changed to static sensing. An unintended wake-up event could be triggered when the WK/VSENSE input is changed to static sensing.
- In SBC Normal, Stop, or Sleep Mode in case of an overcurrent or overtemperature (TSD2) event: the HS GPIO switch will be disabled

Note: The internal timer for cyclic sense is not cleared automatically in case the HS switch is turned off due to above mentioned failures. The timer is only cleared during SBC Restart Mode. This must be considered to avoid loss of wake events, especially before entering SBC Sleep Mode, i.e. the software must ensure that at least another wake source is active or re-enable the GPIO HS again.

5.2.1.2 Cyclic Sense in Low-Power Mode

If cyclic sense is intended for SBC Stop or SBC Sleep Mode mode, it is necessary to activate cyclic sense in SBC Normal Mode before going to the low-power mode. A wake event due to cyclic sense will set the bit **WK_WU**. In SBC Stop Mode a wake event will trigger an interrupt, in SBC Sleep Mode the wake event will send the device via SBC Restart Mode to SBC Normal Mode.
Before returning to SBC Sleep Mode, the wake status register **WK_STAT_0** and **WK_STAT_1** needs to be cleared. Trying to go to SBC Sleep Mode with uncleared wake flags will lead to a direct wake-up from Sleep Mode by going via Restart Mode to Normal Mode and triggering of RSTN.
The reason for this behavior is to prevent a loss of an wake event during the transition.

Note: if an over-current shutdown should occur on the GPIO HS in SBC Sleep Mode, while configured as cyclic sense, and cyclic sense was the only wake source, then the SBC will leave SBC Sleep Mode immediately because there is no other wake source available .

Confidential for ALRT Only

5.2.2 Cyclic Wake

The cyclic wake feature is intended to reduce the quiescent current of the device and application.

For the cyclic wake feature the timer is configured as internal wake-up source and will periodically trigger an interrupt on INTN in SBC Normal and SBC Stop Mode. During SBC Sleep Mode, the timer trigger will wake up the device again, the device enters via SBC Restart Mode the SBC Normal Mode.

The correct sequence to configure the cyclic wake is shown in Figure 11. The sequence is as follows:

- Enable Timer as a wake-up source in the register WK_CTRL_0,
- Configure the respective period of the Timer. Also an on-time (any value except '000' or '110' or '111') must be selected to start the cyclic wake function.

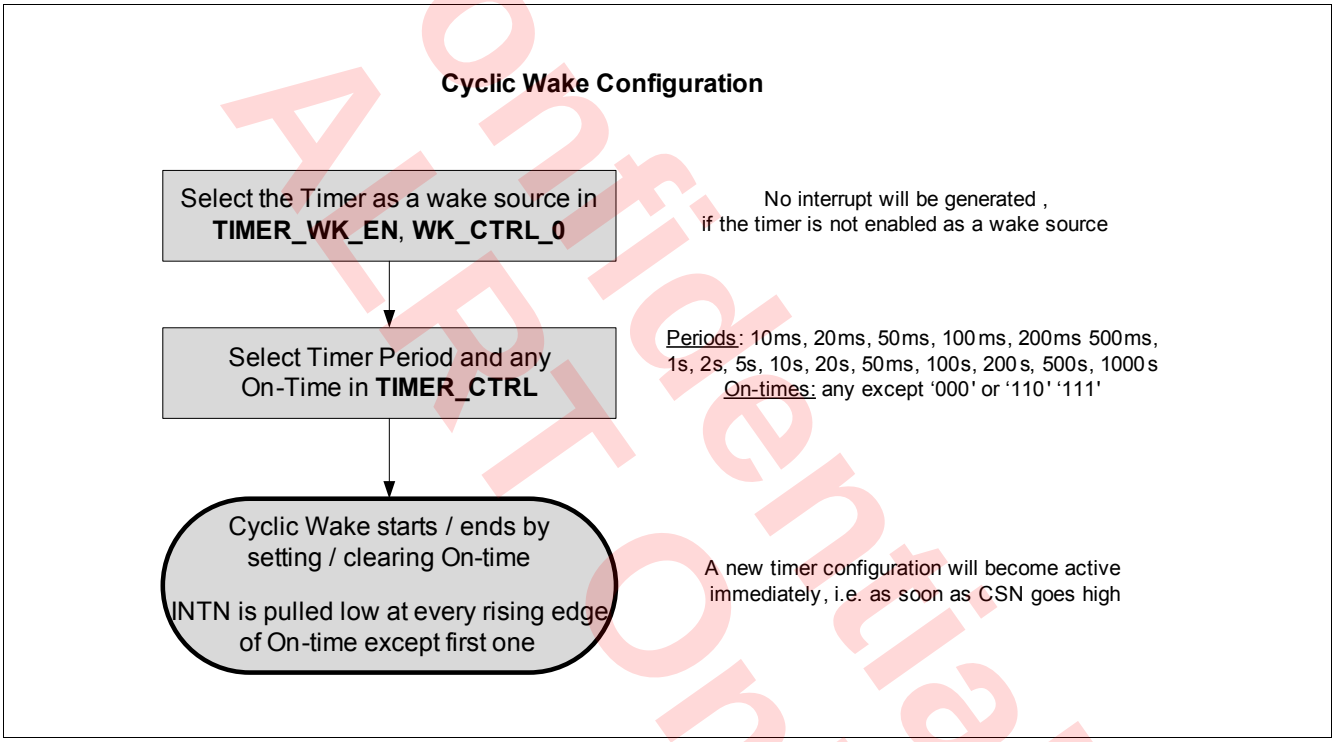

Figure 11 Cyclic Wake: Configuration and Sequence

As in cyclic sense, the cyclic wake function will start as soon as the on-time is configured. An interrupt is generated for every start of the on-time except for the very first time when the timer is started.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.2.3 Internal Timer

The integrated timer can be used to control the below features:

- Cyclic Wake, i.e. to wake up the microcontroller periodically in SBC Normal, Stop and Sleep Mode
- Cyclic Sense, i.e. to perform cyclic sensing using the wake input WK/VSENSE and the GPIO configured as HS by mapping the timer accordingly via the GPIO_CTRL register.

Following periods and on-times can be selected via the register TIMER_CTRL respectively:

- Period: 10ms, 20ms, 50ms, 100ms, 200ms, 500ms, 1s, 2s, 5s, 10s, 20s, 50s, 100s, 200s, 500s, 1000s
- On time: 0.1ms / 0.3ms / 1.0ms / 10ms / 20ms / OFF at HIGH or LOW

Note: It is also possible to activate cyclic sense and cyclic wake at the same time with one timer setting

Confidential for ALRT Only

5.3 Charge Pump Output for Reverse Polarity Protection

A gate-driver (charge-pump output) is integrated in the TLE9471-3ES to drive external n-channel logic-level MOSFETs on-board to provide Reverse Polarity Protection in the application or to control a KL. 30 switch (see Figure 12). The gate voltage is provided at the pin VCP which should be connected as shown in Chapter 14 “Application Information.
The Charge Pump is able to drive up to 3 n-channel MOSFETs with a typ. Ron of 5mΩ.

A spread spectrum modulation feature is implemented for optimum EMC behavior. Enabling and configuring the spread spectrum modulation frequency is achieved via the SPI bits SS_MOD_FR.

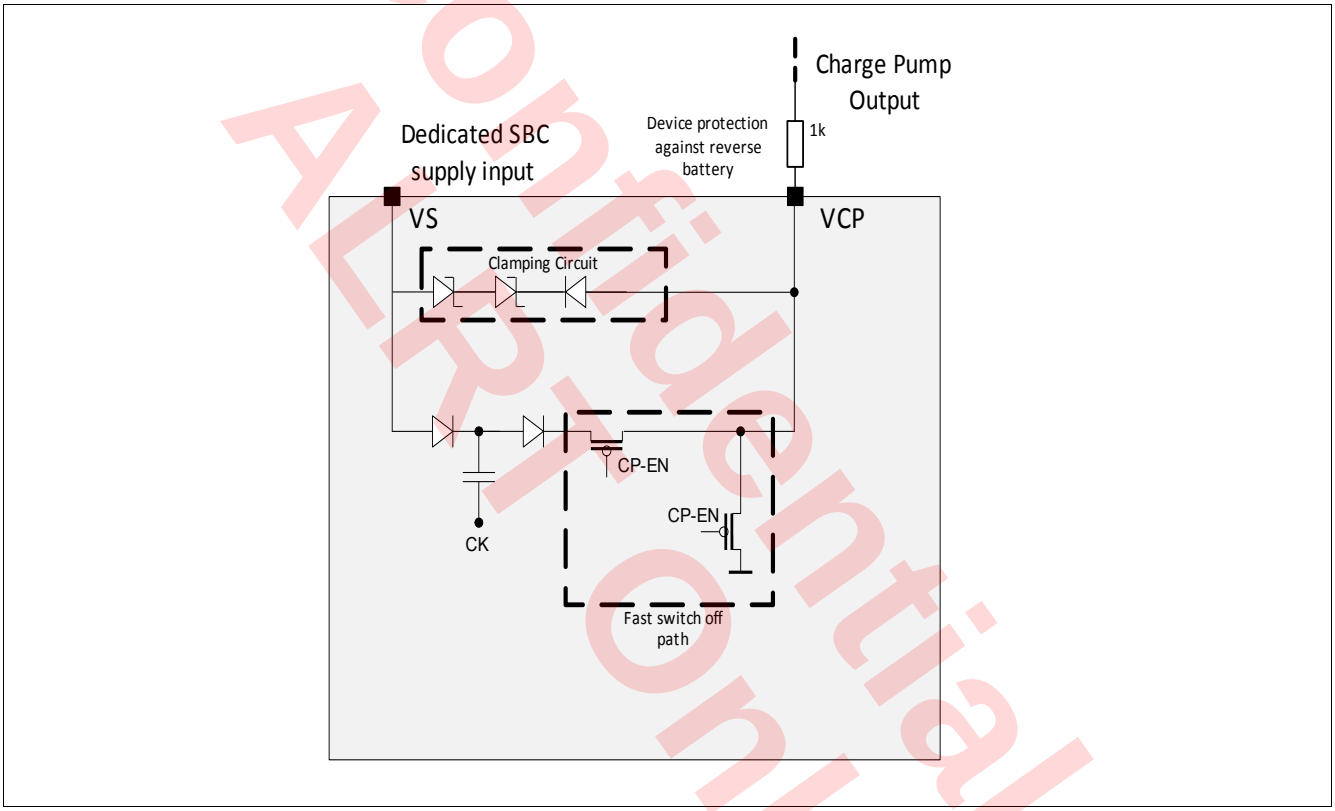

Figure 12 Simplified Charge Pump Block

The charge pump output VCP is disabled in SBC Init Mode and can be configured in SBC Normal Mode via the SPI bit CP_EN. To prevent an unintentional modification of the charge pump state the bit CP_EN can be locked by setting the bit CFG_LOCK_0. In case the charge pump output must be disabled again then it is necessary to clear CFG_LOCK_0 before.

The Charge Pump will also stay enabled in the SBC Stop, Sleep, Restart or Fail-Safe Mode if it was not disabled before entering the respective mode. It will not switch off due to overvoltage.

Diagnosis is available by checking the bit CP_EN.

Confidential for ALRT Only

5.3.1 Electrical Characteristics for Charge Pump

Table 10 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Charge Pump Output Voltage	V_{CP_1}	V_S+ 4.5	–	V_S+ 6.5	V	1) V_S = 5.5V; I_{CP} = -40uA; C_L = 3.3nF	P_5.3.1
Charge Pump Output Voltage	V_{CP_2}	V_S+ 9.5	–	V_S+ 14	V	1)2) V_S = 10V; I_{CP} = -100uA; C_L = 3.3nF	P_5.3.2
Charge Pump Output Voltage	V_{CP_3}	V_S+ 10	–	V_S+ 16	V	1) V_S ≥ 13.5V; I_{CP} = -200uA; C_L = 3.3nF	P_5.3.3
Maximum Charge Pump Output Current	I_{CP}	200	–	1200	µA	1)2) V_{CP} = V_S + 10V; V_S ≥ 13.5V; C_L = 3.3nF	P_5.3.4
Charge Pump Leakage Current	$I_{CP,LK}$	–	0.5	2	µA	2) V_{CP} = 0V = OFF; V_S = 13.5V	P_5.3.5
Charge Pump Enabling Time	t_{CP_ON}	–	95	200	µs	1)2) CSN = HIGH to V_{CP} > V_S + 10V; V_S = 13.5V, C_L = 3.3nF	P_5.3.6
Charge Pump Disabling Time	t_{CP_OFF}	–	45	65	µs	1)2) CSN = HIGH to V_{CP} < V_S + 2V; V_S = 13.5V, C_L = 3.3nF	P_5.3.7

1) Applies for the default frequency setting. See also in **2MHZ_FREQ**

2) Not subject to production test, specified by design.

Confidential for ALRT Only

5.4 High-Voltage Measurement Interface

5.4.1 Block Description

This function provides the possibility to measure a voltage, e.g. the unbuffered battery voltage, with the protected WK/VSENSE HV-input. The measured voltage is routed out at FO/GPIO in case it is not configured as FO.
A simple external voltage divider needs to be placed externally to provide the correct voltage level to the microcontroller A/D converter input. For power-saving reasons, the function is available only in SBC Normal Mode and it is disabled in all other SBC modes.

The benefits of the function is that the signal is measured by a HV-input pin and that there is no current flowing through the resistor divider during low-power modes.

The functionality is shown in a simplified application diagram in Figure 52.

5.4.2 Functional Description

This measurement function is by default disabled. In this case, WK/VSENSE and FO/GPIO have their default functionality. The switch S_MEAS is open for this configuration (see Figure 52), i.e there is no connection between the pins. The measurement function can be enabled via the SPI bit WK_MEAS. If WK_MEAS is set to '1', then the measurement function is enabled and the switch S_MEAS is closed in SBC Normal Mode. S_MEAS is open in all other SBC modes. If this function the pull-up and pull-down currents of WK/VSENSE and FO/GPIO are disabled and the internal WK/VSENSE and FO/GPIO signals are gated. In addition, the settings for WK/VSENSE and FO/GPIO in the registers WK_PUPD_CTRL, WK_CTRL_1 and GPIO_CTRL are ignored but changing these setting is not prevented. The registers WK_STAT_0, WK_STAT_1and WK_LVL_STAT are not updated with respect to the inputs WK/VSENSE and FO/GPIO. However, if only WK/VSENSE or GPIO WK are set as wake sources and a SBC Sleep Mode command is set, then the SPI_FAIL flag will be set and the SBC will be changed into SBC Restart Mode (see Chapter 5.1 also for wake capability of WK/VSENSE and GPIO WK).

If WK_MEAS is set then neither the FO (including the FO test via FO_ON) nor the GPIO functionality or wake functionality will be available. Trying to change the GPIO_CTRL configurations will set the SPI_FAIL.
If FO/GPIO is configured as FO or any other GPIO configuration, then WK_MEAS cannot be set and SPI_FAIL is triggered, i.e. FO/GPIO must be first set to off.

Table 11 Differences between Normal WK Function and Measurement Function

Affected Settings/Modules for WK/VSENSE and FO/GPIO Inputs	WK_MEAS = 0	WK_MEAS = 1
S_MEAS configuration	'open'	'closed' in SBC Normal Mode, 'open' in all other SBC Modes but configuration is kept
Internal WK/VSENSE & FO/GPIO signal processing	Default wake and level signaling function, WK_STAT_0, WK_STAT_1 and WK_LVL_STAT are updated accordingly	WK/VSENSE and FO/GPIO signals are gated internally, WK_STAT_0, WK_STAT_1 and WK_LVL_STAT are not updated

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 11 **Differences between Normal WK Function and Measurement Function** (cont'd)

Affected Settings/Modules for WK/VSENSE and FO/GPIO Inputs	WK_MEAS = 0	WK_MEAS = 1
WK_EN, GPIO configured as WK	Wake-up via WK/VSENSE and GPIO WK possible	Setting the wake enable bits is ignored, i.e. the measurement function has priority but the bits can be set. If only WK_EN and/or GPIO as WK are set while trying to go to SBC Sleep Mode, then the SPI_FAIL flag will be set and the SBC will be changed into SBC Restart Mode
SBC Fail-Safe Mode behavior	WK/VSENSE is automatically activated as wake source; see Table 30 for GPIO behavior	Measurement function configuration is kept, switch S_MEAS is open
WK_PUPD_CTRL	normal configuration is possible	no pull-up or pull-down enabled
FO functionality	FO functionality is available if configured accordingly	FO functionality is not available. FO/GPIO must first be set to OFF before settingWK_MEAS. Otherwise the SPI_FAIL flag will be set.

Note: There is a diode in series to the switch S_MEAS (not shown in the Figure 52), which will influence the temperature behavior of the switch. See also Figure 13.

Confidential for ALRT Only

5.4.3 Electrical Characteristics for Measurement Interface

Table 12 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Input leakage current	$I_{WK_MEAS_LK}$	-2		2	µA	0 V < V_{WK_IN} < VS + 0.3V	P_5.4.1
Drop Voltage across S_MEAS switch between WK/VSENSE and FO/GPIO when enabled for voltage measurement;	V_{Drop,S_MEAS}		160		mV	[1] 4V < V_{WK_IN} < VS + 0.3V; I_{WK1} = 200µA; T_j = 25°C Refer to Figure 13	P_5.4.2

1) Not subject to production test; specified by design

Figure 13 Typical Drop Voltage Characteristics of switch S_MEAS (between WK/VSENSE & FO/GPIO)

Confidential for ALRT Only

5.5 Spread Spectrum Modulation Frequency Function

The spread spectrum modulation frequency function can be used to reduce the emission for the buck regulator and for the charge pump.

The spread spectrum function can be enabled and configured by the bits SS_MOD_FR.

The spread spectrum function is derived by the internal 2MHz oscillator (~0.5µs period). The calculations below are applied to the 2.0MHz setting (2MHZ_FREQ = ‘001’ (for all the other frequencies the values can be derived).

There is a counter which is then adjusting the oscillator step values up and down. There is a maximum of 32 steps for the counter available. For the frequency range 2MHZ_FREQ = ‘0xx’ we can choose following modulation frequencies:

Table 13 Deriving the Modulation Frequency Steps

Setting	Periods / Step Width	Resulting Period	Modulation Frequency
SS_MOD_FR = ‘11’	0.5us / 1 period of 0.5us	16us	1/16us = 62.5 kHz
SS_MOD_FR = ‘10’	1.0us / 2 periods of 0.5us	32us	1/32us = 31.25 kHz
SS_MOD_FR = ‘01’	2.0us / 4 periods of 0.5us	64us	1/64us = 15.625 kHz

Confidential for ALRT Only

5.6 Partial Networking on CAN

5.6.1 CAN Partial Networking - Selective Wake Feature

The CAN Partial Networking feature can be activated for SBC Normal Mode, in SBC Sleep Mode and in SBC Stop Mode. For SBC Sleep Mode the Partial Networking has to be activated before sending the SBC to Sleep Mode. For SBC Stop Mode the Partial Networking has to be activated before going to SBC Stop Mode.

There are 2 detection mechanism available

- WUP (Wake-Up Pattern) this is a CAN wake, that reacts on the CAN dominant time, with 2 dominant signals as defined in ISO WG11898-6.
- WUF (Wake-Up frame) this is the wake-up on a CAN frame that matches the programmed message filter configured in the SBC via SPI.

The default baudrate is set to 500kBaud. Besides the commonly used baudrates of 125kBaud and 250kBaud, other baudrates up to 1MBaud can be selected (see Chapter 13 for more details).

Confidential for ALRT Only

5.6.2 SBC Partial Networking Function

The CAN Partial Networking Modes are shown in this figure.

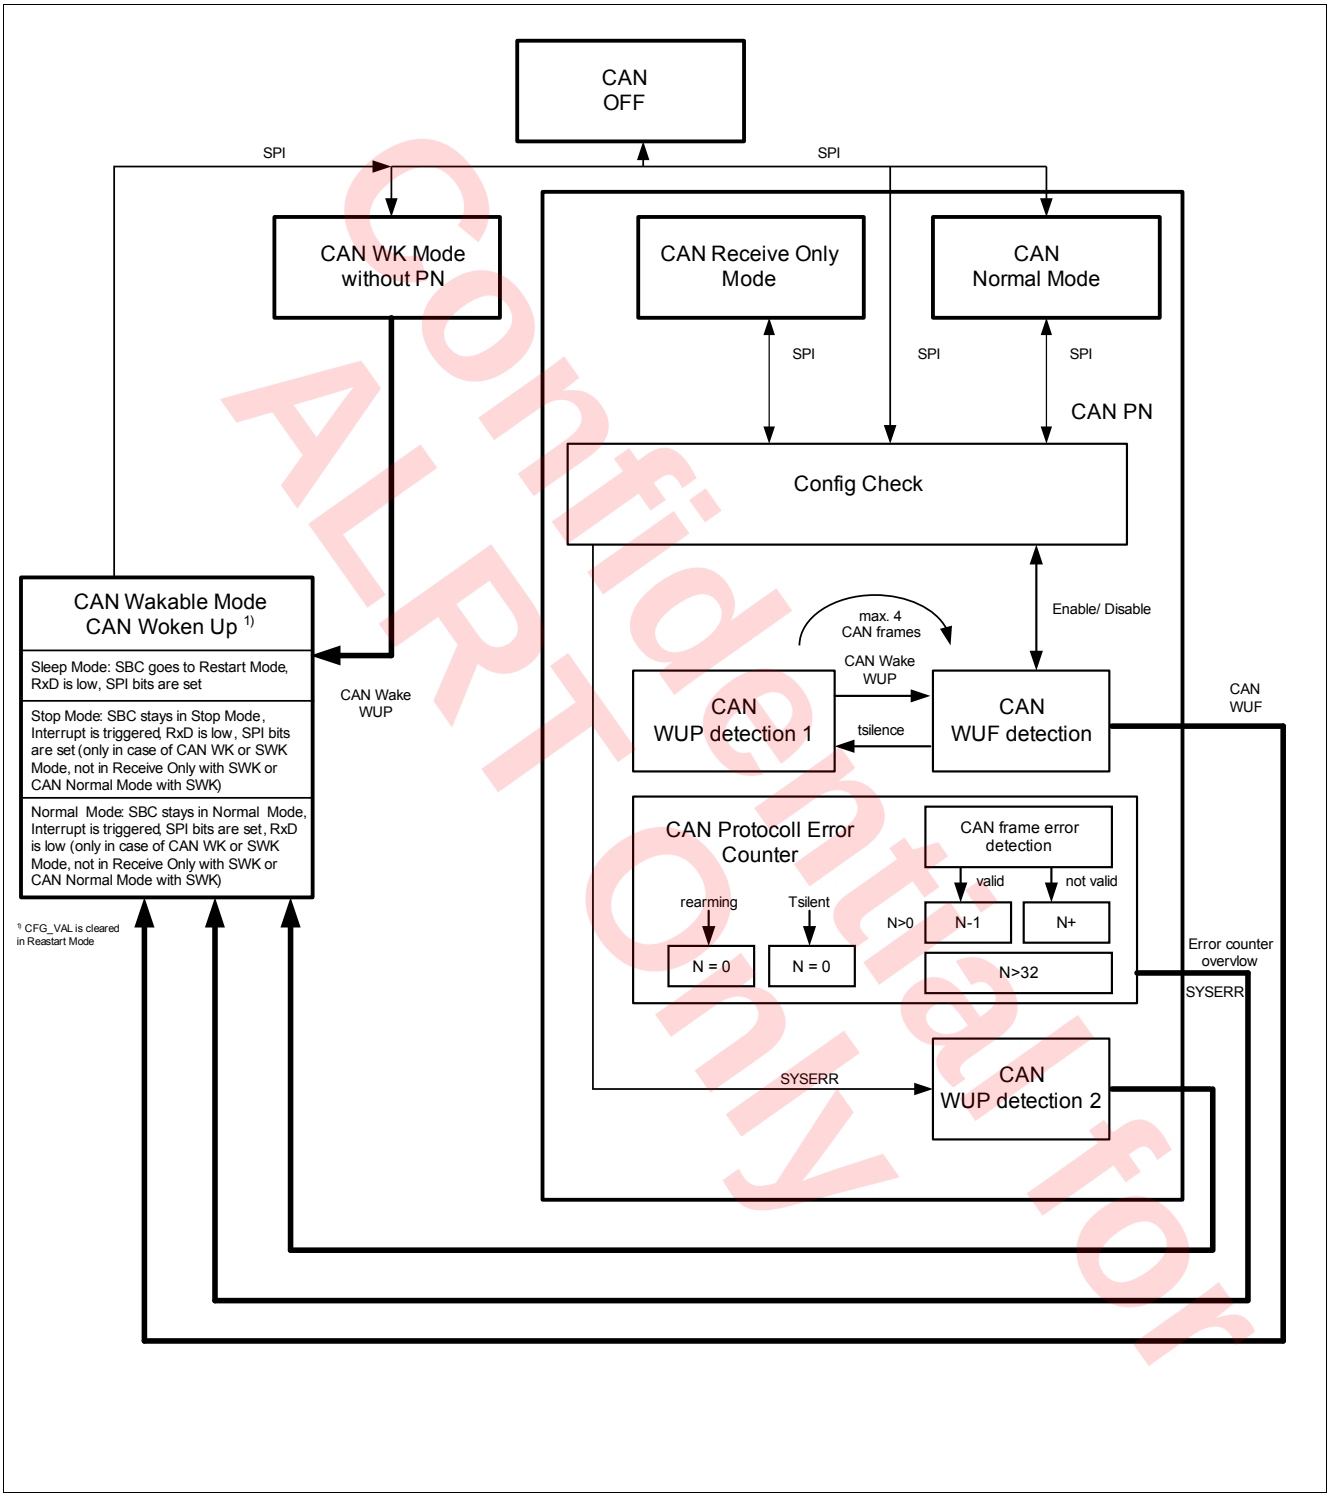

Figure 14 CAN Selective Wake State Diagram

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.6.2.1 Activation of SWK

Below figure shows the principal of the SWK activation.

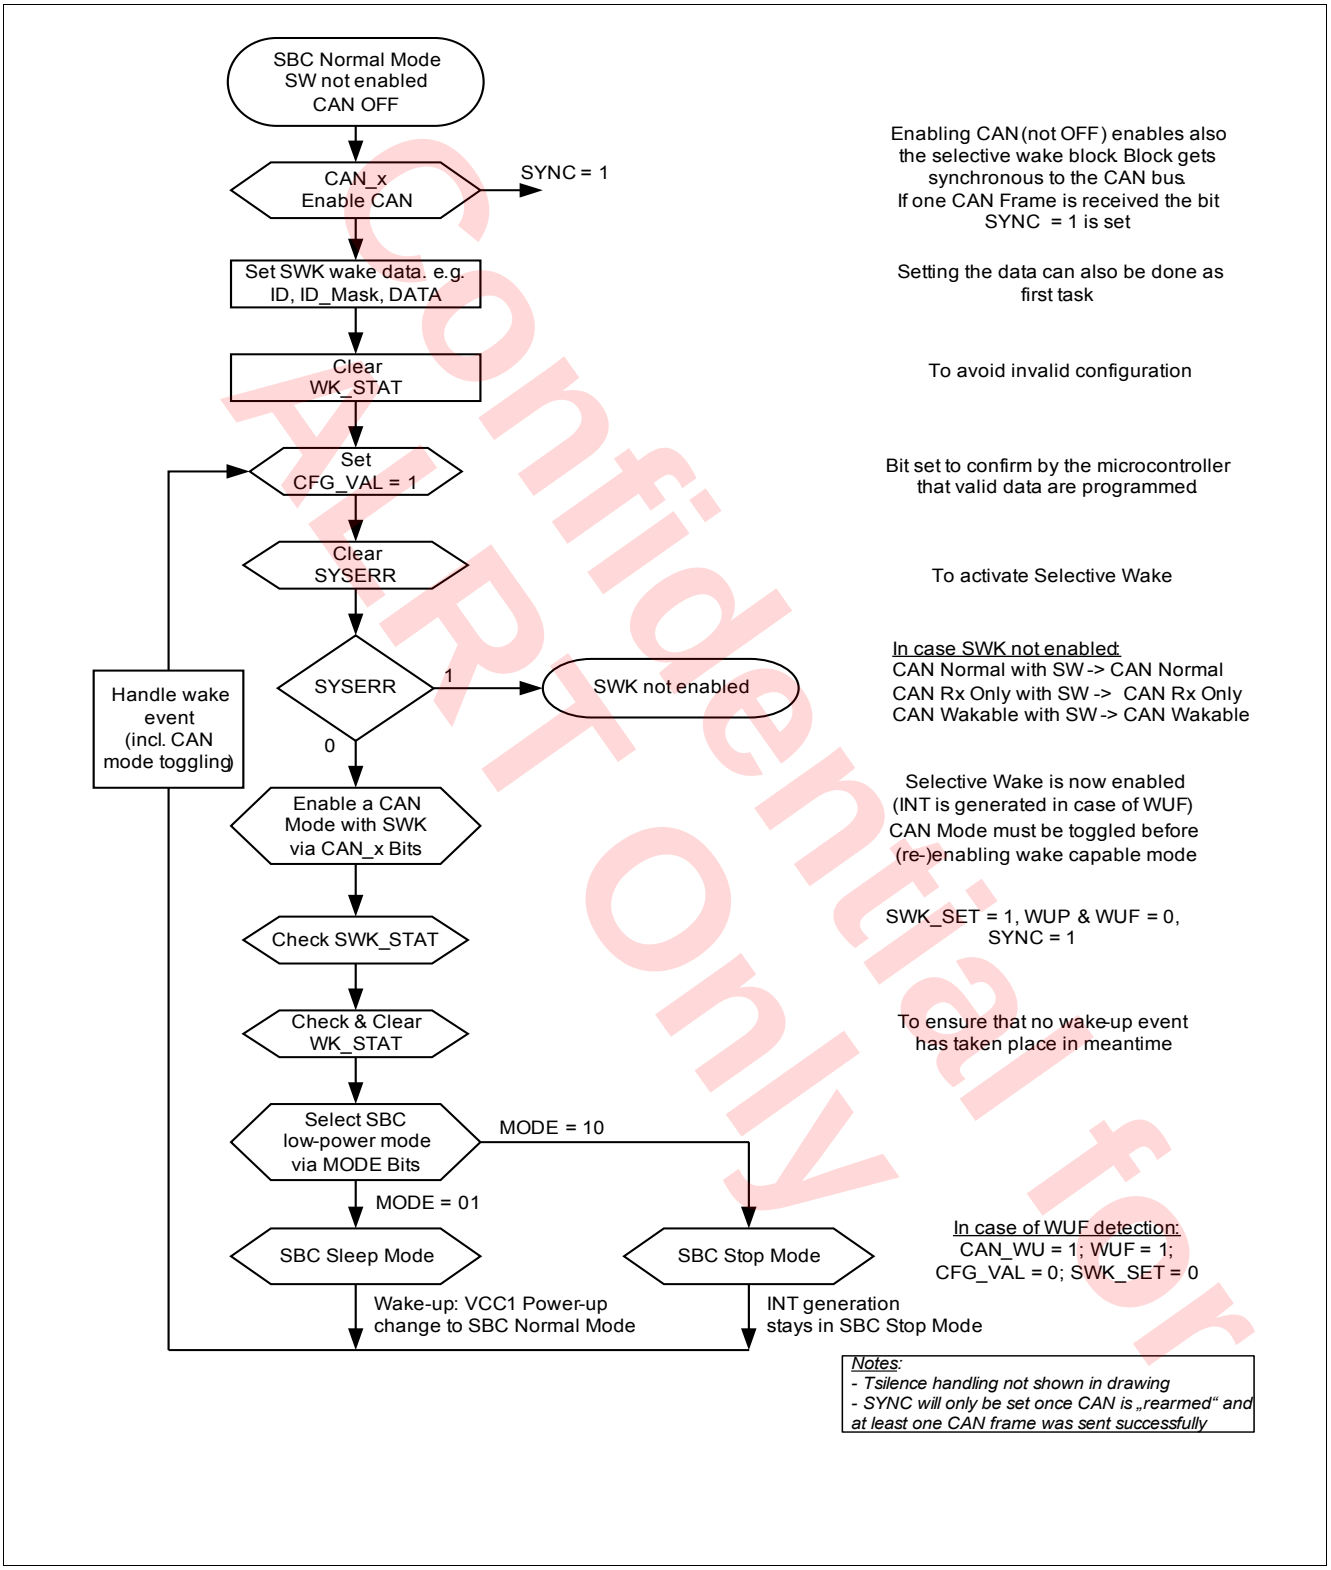

Figure 15 Flow for activation of SWK

Confidential for ALRT Only

5.6.2.2 Wake-up Pattern (WUP)

A WUP is signaled on the bus by two consecutive dominant bus levels for at least t_{Wake1}, each separated by a recessive bus level.

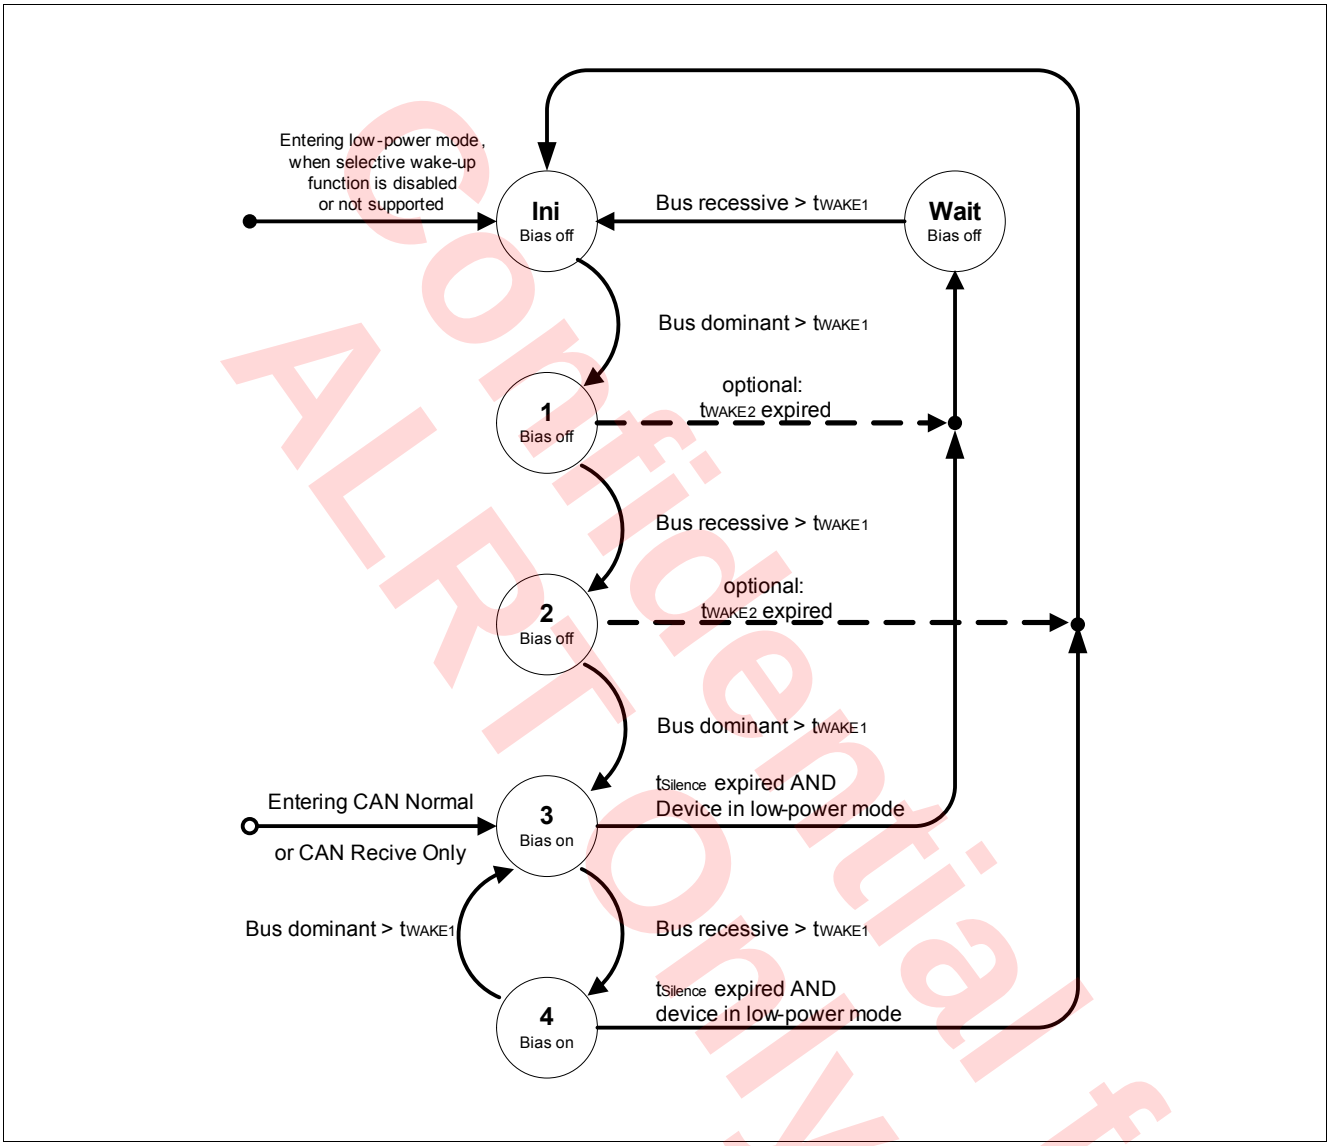

Figure 16 WUP detection following the definition in ISO 11898-2

5.6.2.3 Wake-up Frame (WUF)

The wake-up frame is defined in ISO 11898-6

Only CAN frames according ISO11989-1 are considered as potential wake-up frames.

A bus wake-up shall be performed, if selective wake-up function is enabled and a "valid WUF" has been received. The transceiver may ignore up to four consecutive CAN data frames that start after switching on the bias.

A received frame is a “valid WUF” in case all of the following conditions are met:

- The ID of the received frame is exactly matching a configured ID in the relevant bit positions. The relevant bit positions are given by an ID mask. The ID and the ID mask might have either 11 bits or 29 bits.
- The DLC of the received frame is exactly matching the configured DLC.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

- In case DLC is greater than 0, the data field of the received frame has at least one bit set in a bit position, where also in the configured data mask in the corresponding bit position the bit is set.
- No error exists according to ISO 11898-1 except errors which are signalled in the ACK field and EOF field.

5.6.2.4 CAN Protocol Error Counter

The counter is incremented, when a bit stuffing, CRC or form error according to ISO11898-1 is detected. If a frame has been received that is valid up to the end of the CRC field and the counter is not zero, the counter is decremented.
If the counter has reached a value of 31, the following actions is performed on the next increment of this counter:

- The selective wake function is disabled,
- the CAN transceiver is woken,
- SYSERR is set and the error counter value = 32 can be read.

On each increment or decrement of the counter the decoder unit waits for at least 6 and most 10 recessive bits before considering a dominant bit as new start of frame.

The error counter is enabled:

- whenever the CAN is in Normal Mode, Receive Only Mode or in WUF detection state.

The error counter is cleared under the following conditions:

- at the transition from WUF detection to WUP detection 1 (after $t_{SILENCE}$ expiration, while SWK is correctly enabled)
- When WUF detection state is entered (in this way the counter will start from 0 when SWK is enabled)
- At CAN rearming (when exiting the woken state)
- When the CAN Mode bits are selected ‘000’, ‘100’ (CAN off) or 0’01’ (Wake capable without SWK function enabled)
- While CAN_FD_EN = ‘1’ and DIS_ERR_CNT = ‘1’
  (the counter is cleared and stays cleared when these two bits are set in the SPI registers)

The Error Counter is frozen:

- after a wake-up being in woken state

The counter value can be read out of the bits ECNT.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.6.3 Diagnoses Flags

5.6.3.1 PWRON/RESET-FLAG

The power-on reset can be detected and read by the POR bit in the SBC Status register.

The VS power on resets all register in the SBC to reset value. SWK is not configured.

5.6.3.2 BUSERR-Flag

Bus Dominant Time-out detection is implemented and signaled by CAN_Fail_x in register BUS_STAT.

5.6.3.3 TXD Dominant Time-out flag

TXD Dominant timeout is shown in the SPI bit CAN_FAIL_x in register BUS_STAT.

5.6.3.4 WUP Flag

The WUP bit in the SWK_STAT register shows that a Wake-Up Pattern (WUP) has caused a wake of the CAN transceiver. It can also indicate an internal mode change from WUP detection 1 state to WUF detection after a valid WUP.

In the following case the bit is set:

- SWK is activated: due to $t_{SILENCE}$, the CAN changes into the state WUP detection 1. If a WUP is detected in this state, then the WUP bit is set
- SWK is deactivated: the WUP bit is set if a WUP wakes up the CAN. In addition, the CAN_WU bit is set.
- in case WUP is detected during WUP detection 2 state (after a SYSERR) the bits WUP and CAN_WU are set

The WUP bit is cleared automatically by the SBC at the next rearming of the CAN transceiver.

Note: It is possible that WUF and WUP bit are set at the same time if a WUF causes a wake out of SWK, by setting the interrupt or by restart out of SBC Sleep Mode. The reason is because the CAN has been in WUP detection 1 state during the time of SWK mode (because of $t_{SILENCE}$). See also Figure 14.

5.6.3.5 WUF Flag (WUF)

The WUF bit in the SWK_STAT register shows that a Wake-Up frame (WUF) has caused a wake of the CAN block. In SBC Sleep Mode this wake causes a transition to SBC Restart Mode, in SBC Normal Mode and in SBC Stop Mode it causes an interrupt. Also in case of this wake the bit CAN_WU in the register WK_STAT_0 is set.

The WUF bit is cleared automatically by the SBC at the next rearming of the CAN SWK function.

5.6.3.6 SYSERR Flag (SYSERR)

The bit SYSERR is set in case of an configuration error and in case of an error counter overflow. The bit is only updated (set to ‘1’) if a CAN mode with SWK is enabled via CAN_x. If INT_ GLOBAL is set, then an interrupt is triggered on INTN every time SYSERR is set.

When programming selective wake via CAN_x, SYSERR = ‘0’ signals that the SWK function has been enabled. The bit can be cleared via SPI. The bit is ‘0’ after Power on Reset of the SBC.

5.6.3.7 Configuration Error

A configuration error sets the SYSERR bit to ‘1’. A configuration check is performed when enabling SWK via the bits CAN_x. If the check is successful SWK is enabled, the bit SYSERR is set to ‘0’. In SBC Normal Mode it is also

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

possible to detect a Configuration Error while SWK is enabled. This will occur if the CFG_VAL bit is cleared, e.g. by changing the SWK registers (from address 010 0001 to address 011 0011). In SBC Stop Mode and SBC Sleep Mode this is not possible as the SWK registers can not be changed.

Configuration Check:
in SBC Restart Mode, the CFG_VAL bit is cleared by the SBC. If the SBC Restart Mode was not triggered by a WUF wake up from SBC Sleep Mode and the CAN was with SWK enabled, than the SYSERR bit will be set.
The SYSERR bit has to be cleared by the microcontroller.
The SYSERR bit cannot be cleared when CAN_2 is '1' and below conditions occur:

- Data valid bit not set by microcontroller, i.e. CFG_VAL is not set to '1'. The CFG_VAL bit is reset after SWK wake and needs to be set by the microcontroller before activation SWK again.
- CFG_VAL bit reset by the SBC when data are changed via SPI programming. (Only possible in SBC Normal Mode)

Note: The SWK configuration is still valid if only the SWK_CTRL register is modified.

5.6.3.8 CAN Bus Timeout-Flag (CANTO)

In CAN WUF detection and CAN WUP detection 2 state the bit CANTO is set to '1' if the time $t_{SILENCE}$ expires. The bit can be cleared by the microcontroller. If the interrupt function for CANTO is enabled then an interrupt is generated in SBC Stop or SBC Normal Mode when the CANTO set to '1'. The interrupt is enabled by setting the bit CANTO_ MASK to '1'. Each CANTO event will trigger a interrupt even if the CANTO bit is not cleared.

There is no wake out of SBC Sleep Mode because of CAN time-out.

5.6.3.9 CAN Bus Silence-Flag (CANSIL)

In CAN WUF detection and CAN WUP detection 2 state the bit CANSIL is set to '1' if the time $t_{SILENCE}$ expires. The CANSIL bit is set back to '0' with a WUP. With this bit the microcontroller can monitor if there is activity on the CAN bus while being in SWK Mode. The bit can be read in SBC Stop and SBC Normal Mode.

5.6.3.10 SYNC-FLAG (SYNC)

The bit SYNC shows that SWK is working and synchronous to the CAN bus. To get a SYNC bit set it is required to enable the CAN to CAN Normal or in Receive Only Mode or in WUF detection. It is not required to enable the CAN SWK Mode.

The bit is set to '1' if a valid CAN frame has been received (no CRC error and no stuffing error). It is set back to '0' if a CAN protocol error is detected. When switching into SWK mode the SYNC bit indicates to the microcontroller that the frame detection is running and the next CAN frame can be detected as a WUF, CAN wake-up can now be handled by the SBC. It is possible to enter a SBC low-power mode with SWK even if the bit is not set to '1', as this is necessary in case of a silent bus.

5.6.3.11 SWK_SET FLAG (SWK_SET)

The SWK_SET bit is set to signalize the following states (see also Figure 14):

- when SWK was correctly enabled in WUF Detection state,
- when SWK was correctly enabled when in WUP Detection 1 state,
- after a SYSERR before a wake event in WUP Detection 2 state,

The bit is cleared under following conditions:

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

- after a wake-up (ECNT overflow, WUP in WUP detection 2, WUF in WUF detection)
- if CAN_2 is cleared

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

5.6.4 SBC Modes for Selective Wake (SWK)

The SBC mode is selected via the MODE bits as described in Chapter 5.1.

The mode of the CAN transceiver needs to be selected in SBC Normal Mode. The CAN mode is programed the bits CAN_0, CAN_1 and CAN_2. In the low-power modes (SBC Stop, SBC Sleep) the CAN mode can not be changed via SPI.

The detailed SBC state machine diagram including the CAN selective wake feature is shown in Figure 3.

The application must now distinguish between the normal CAN operation an the selective wake function:

- WK Mode: This is the normal CAN wake capable mode without the selective wake function
- SWK Mode: This is the CAN wake capable mode with the selective wake function enabled

Figure 17 shows the possible CAN transceiver modes.

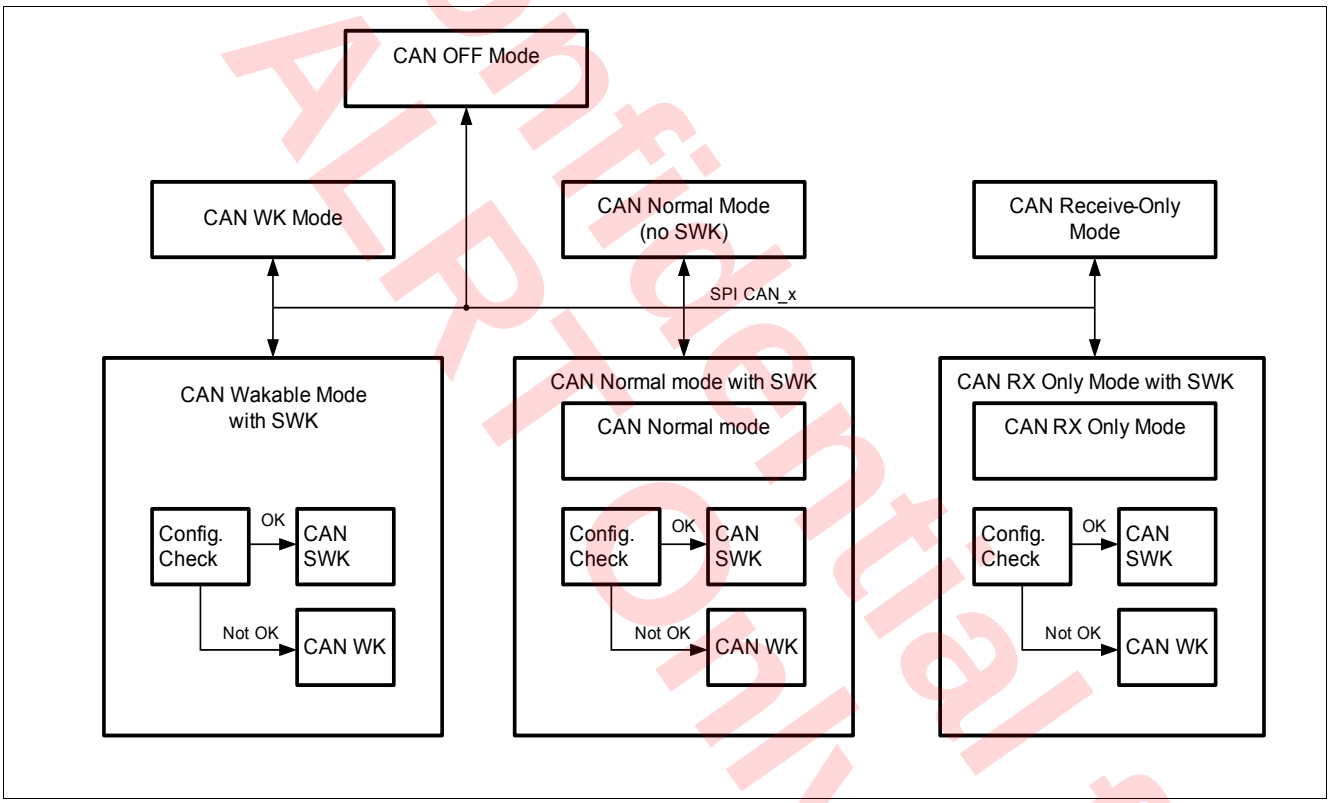

Figure 17 CAN SWK State Diagram

5.6.4.1 SBC Normal Mode with SWK

In SBC Normal Mode the CAN Transceiver can be switched into the following CAN Modes

- CAN off
- CAN WK Mode (without SWK)
- CAN SWK Mode
- CAN Receive Only (No SWK activated)
- CAN Receive Only Mode with SWK
- CAN Normal Mode (No SWK activated)
- CAN Normal Mode with SWK

In the CAN Normal Mode with SWK the CAN Transceiver works as in SBC Normal Mode, so bus data is received through RXD, data is transmitted through TXD and sent to the bus. In addition the SWK block is active. It

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

monitors the data on the CAN bus, updates the error counter and sets the CANSIL flag if there is no communication on the bus.
It will generate an CAN Wake interrupt in case a WUF is detected (RXD is not pulled to low in this configuration).

In CAN Receive Only Mode with SWK, CAN data can be received on RXD and SWK is active, no data can be sent to the bus.

The bit SYSERR = '0' indicates that the SWK function is enabled, and no frame error counter overflow is detected.

Table 14 CAN Modes selected via SPI in SBC Normal Mode

CAN Mode	CAN_2	CAN_1	CAN_0
CAN off	0	0	0
CAN WK Mode (no SWK)	0	0	1
CAN Receive Only (no SWK)	0	1	0x
CAN Normal Mode (no SWK)	0	1	1
CAN off	1	0	0
CAN SWK Mode	1	0	1
CAN Receive Only with SWK	1	1	0
CAN Normal Mode with SWK	1	1	1

When reading back CAN_x the programmed mode is shown in SBC Normal Mode. To read the real CAN mode the bits SYSERR, SWK_SET and CAN have to be evaluated. A change out of SBC Normal Mode can change the CAN_0 and CAN_1 bits.

5.6.4.2 SBC Stop Mode with SWK

In SBC Stop Mode the CAN Transceiver can be operated with the following CAN Modes

- CAN off
- CAN WK Mode (no SWK)
- CAN SWK Mode
- CAN Receive Only (no SWK)
- CAN Receive Only with SWK
- CAN Normal Mode (no SWK)
- CAN Normal Mode with SWK

To enable CAN SWK Mode the CAN has to be switched to "CAN Normal Mode with SWK", "CAN Receive Only Mode with SWK" or to "CAN SWK Mode" in SBC Normal Mode before sending the SBC to SBC Stop Mode. The bit SYSERR = '0' indicates that the SWK function is enabled. The table shows the change of CAN Mode when switching from SBC Normal Mode to SBC Stop Mode.

Note: CAN Receive Only Mode in SBC Stop Mode is implemented to also enable pretended networking (Partial networking done in the microcontroller).

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 15 CAN Modes change when switching from SBC Normal Mode to SBC Stop Mode

Programmed CAN Mode in SBC Normal Mode	CAN_x bits	SYSERR bit	CAN Mode in SBC Stop Mode	CAN_x bits
CAN off	000	0	CAN off	000
CAN WK Mode (no SWK)	001	0	CAN WK Mode (no SWK)	001
CAN Receive Only (no SWK)	010	0	CAN Receive Only (no SWK)	010
CAN Normal Mode (no SWK)	011	0	CAN Normal Mode (no SWK)	011
CAN off	100	0	CAN off	100
CAN SWK Mode	101	0	CAN SWK Mode	101
CAN SWK Mode	101	1	CAN WK Mode (no SWK)	101
CAN Receive Only with SWK	110	0	CAN Receive Only with SWK	110
CAN Receive Only with SWK	110	1	CAN Receive Only (no SWK)	110
CAN Normal Mode with SWK	111	0	CAN Normal Mode with SWK	111
CAN Normal Mode with SWK	111	1	CAN Normal Mode (no SWK)	111

Note: When SYSERR is set then WUF frames will not be detected, i.e. the selective wake function is not activated (no SWK), but the MSB of CAN mode is not changed in the register.

5.6.4.3 SBC Sleep Mode with SWK

In SBC Sleep Mode the CAN Transceiver can be switched into the following CAN Modes

- CAN off
- CAN WK Mode (without SWK)
- CAN SWK Mode

To enable “CAN SWK Mode” the CAN has to be switched to “CAN Normal Mode with SWK”, “CAN Receive Only Mode with SWK” or to “CAN SWK Mode” in SBC Normal Mode before sending the device to SBC Sleep Mode. The table shows the change of CAN mode when switching from SBC Normal Mode to Sleep Mode.

A wake from Sleep Mode with Selective Wake (Valid WUF) leads to Restart Mode. In Restart Mode the CFG_VAL bit will be cleared by the SBC, the SYSERR bit is not set. In the register CAN_x the programmed CAN SWK Mode (101) can be read.

To enable the CAN SWK Mode again and to enter SBC Sleep Mode the following sequence can be used; Program a CAN Mode different from CAN SWK Mode (101, 110, 111), set the CFG_VAL, CLEAR SYSERR bit, Set CAN_x bits to CAN SWK Mode (101), switch SBC to Sleep Mode.

To enable the CAN WK Mode or CAN SWK Mode again after a wake on CAN a rearming is required for the CAN transceiver to be wake capable again. The rearming is done by programming the CAN into a different mode with the CAN_x bit and back into the CAN WK Mode or CAN SWK Mode. To avoid lock-up when switching the SBC into Sleep Mode with an already woken CAN transceiver, the SBC does an automatic rearming of the CAN transceiver when switching into Sleep Mode. So after switching into Sleep Mode the CAN transceiver is either in CAN SWK Mode or CAN WK Mode depending on CAN_x setting and SYSERR bit (If CAN is switched to off Mode it is also off in Sleep Mode)

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 16 CAN Modes change when switching to SBC Sleep Mode

Programmed CAN Mode in SBC Normal Mode	CAN_x bits	SYSERR bit	CAN Mode in SBC Sleep Mode	CAN_x bits
CAN off	000	0	CAN off	000
CAN WK Mode (no SWK)	001	0	CAN WK Mode (no SWK)	001
CAN Receive Only (no SWK)	010	0	CAN WK Mode (no SWK)	001
CAN Normal Mode (no SWK)	011	0	CAN WK Mode (no SWK)	001
CAN off	100	0	CAN off	100
CAN SWK Mode	101	0	CAN SWK Mode	101
CAN SWK Mode	101	1	CAN WK Mode (no SWK)	101
CAN Receive Only with SWK	110	0	CAN SWK Mode	101
CAN Receive Only with SWK	110	1	CAN WK Mode (no SWK)	101
CAN Normal Mode with SWK	111	0	CAN SWK Mode	101
CAN Normal Mode with SWK	111	1	CAN WK Mode (no SWK)	101

5.6.4.4 SBC Restart Mode with SWK

If SBC Restart Mode is entered the transceiver can change the CAN mode. During Restart or after Restart the following modes are possible

- CAN off
- CAN WK Mode (either still wake cable or already woken up)
- CAN SWK Mode (WUF Wake from Sleep)

Table 17 CAN Modes change in case of Restart out of SBC Normal Mode

Programmed CAN Mode in SBC Normal Mode	CAN_x bits	SYSERR bit	CAN Mode in and after SBC Restart Mode	CAN_x bits	SYSERR bit
CAN off	000	0	CAN off	000	0
CAN WK Mode (no SWK)	001	0	CAN WK Mode (no SWK)	001	0
CAN Receive Only (no SWK)	010	0	CAN WK Mode (no SWK)	001	0
CAN Normal Mode (no SWK)	011	0	CAN WK Mode (no SWK)	001	0
CAN off	100	0	CAN off	100	0
CAN SWK Mode	101	0	CAN WK Mode (no SWK)	101	1
CAN SWK Mode	101	1	CAN WK Mode (no SWK)	101	1
CAN Receive Only with SWK	110	0	CAN WK Mode (no SWK)	101	1
CAN Receive Only with SWK	110	1	CAN WK Mode (no SWK)	101	1
CAN Normal Mode with SWK	111	0	CAN WK Mode (no SWK)	101	1
CAN Normal Mode with SWK	111	1	CAN WK Mode (no SWK)	101	1

The various reasons for entering SBC Restart Mode and the respective status flag settings are shown in Table 18.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 18 CAN Modes change in case of Restart out of SBC Sleep Mode

CAN Mode in SBC Sleep Mode	CAN Mode in and after SBC Restart Mode	CAN_x	SYS ERR	CAN_WU	WUP	WUF	ECNT_x	Reason for Restart
CAN off	CAN off	000	0	0	0	0	0	Wake on other wake source
CAN WK Mode	CAN woken up	001	0	1	1	0	0	Wake (WUP) on CAN
CAN WK Mode	CAN WK Mode	001	0	0	0	0	0	Wake on other wake source
CAN SWK Mode	CAN woken up	101	0	1	0/1[1)]	1	x	Wake (WUF) on CAN
CAN SWK Mode,	CAN woken up	101	1	1	0/1[2)]	0	100000	Wake due to error counter overflow
CAN SWK selected, CAN WK active	CAN woken up.	101	1	1	1	0	0	Wake (WUP) on CAN, config check was not pass
CAN SWK Mode	CAN WK Mode	101	1	0	0/1	0	x	Wake on other wake source

1) In case there is a WUF detection within $t_{SILENCE}$ then the WUP bit will not be set. Otherwise it will always be set together with the WUF bit.

2) In some cases the WUP bit might stay cleared even after $t_{SILENCE}$, e.g. when the error counter expires without detecting a wake-up pattern.

5.6.4.5 SBC Fail-Safe Mode with SWK

When SBC Fail-Safe Mode is entered the CAN transceiver is automatically set into WK Mode (wake capable) without the selective wake function.

5.6.5 Wake-up

A wake-up via CAN leads to a restart out of SBC Sleep Mode and to an interrupt in SBC Normal Mode, and in SBC Stop Mode. After the wake event the bit CAN_WU is set, and the details about the wake can be read out of the bits WUP, WUF, SYSERR, and ECNT.

5.6.6 Configuration for SWK

The CAN protocol handler settings can be configured in following registers:

- SWK_BTL0_CTRL defines the number of time quanta in a bit time. This number depends also on the internal clock settings performed in the register SWK_CDR_CTRL2;
- SWK_BTL1_CTRL defines the sampling point position;
- The respective receiver during frame detection mode can be selected via the bit RX_WK_ SEL;
- The clock and data recovery (see also Chapter 5.6.8) can be configured in the registers SWK_CDR_CTRL1, SWK_CDR_CTRL2, SWK_CDR_LIMIT_HIGH_CTRL and SWK_CDR_LIMIT_LOW_CTRL;

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

The actual configuration for selective wake is done via the Selective Wake Control Registers SWK_IDx_CTRL, SWK_MASK_IDx_CTRL, SWK_DLC_CTRL, SWK_DATAx_CTRL.

The oscillator has the option to be trimmed by the microcontroller. To measure the oscillator, the SPI bit OSC_CAL needs to be set to 1 and a defined pulse needs to be given to the TXDCAN pin by the microcontroller (e.g. 1µs pulse, CAN needs to be switched off before). The SBC measures the length of the pulse by counting the time with the integrated oscillator. The counter value can be read out of the register SWK_OSC_CAL_H_STATE and SWK_OSC_CAL_L_STATE. To change the oscillator the trimming function needs to be enabled by setting the bits TRIM_EN_x = 11 (and OSC_CAL = 1). The oscillator can then be adjusted by writing into the registers SWK_OSC_TRIM_CTRL and SWK_OPT_CTRL. To finish the trimming, the bits TRIM_EN_x need to be set back to “00”.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.6.7 CAN Flexible Data Rate (CAN FD) Tolerant Mode

The CAN FD tolerant mode can be activated by setting the bit CAN_FD_ EN = '1' in the register SWK_CAN_FD_CTRL.

With this mode the internal CAN frame decoding will be stopped for CAN FD frame formats:

- The high baudrate part of a CAN FD frame will be ignored,
- No Error Handling (Bit Stuffing, CRC checking, Form Errors) will be applied to remaining CAN frame fields (Data Field, CRC Field, …),
- No wake up is done on CAN FD frames.

The internal CAN frame decoder will be ready for new CAN frame reception when the End of frame (EOF) of a CAN FD frame is detected.The identification for a CAN FD frame is based on the EDL Bit, which is sent in the Control Field of a CAN FD frame:

- EDL Bit = 1 identifies the current frame as an CAN FD frame and will stop further decoding on it.
- EDL Bit = 0 identifies the current frame as CAN 2.0 frame and processing of the frame will be continued

In this way it is possible to send mixed CAN frame formats without affecting the selective wake functionality by error counter increment and subsequent misleading wake up. In addition to the CAN_FD_ EN bit also a filter setting must be provided for the CAN FD tolerant mode. This filter setting defines the minimum dominant time for a CAN FD dominant bit which will be considered as a dominant bit from the CAN FD frame decoder. This value must be aligned with the selected high baudrate of the data field in the CAN network.

To support programming via CAN during CAN FD mode a dedicated SPI bit DIS_ERR_ CNT is available to avoid an overflow of the implemented error counter (see also Chapter 5.6.2.4).

The behavior of the error counter depends on the setting of the bits DIS_ERR_ CNT and CAN_FD_ EN and is show in below table:

Table 19 Error Counter Behavior

DIS_ERR_ CNT setting	CAN_FD_ EN setting	Error Counter Behavior
0	0	Error Counter counts up when a CAN FD frame or an incorrect/corrupted CAN frame is received; counts down when a CAN frame is received properly (as specified in ISO 11898-6)
1	0	Error Counter counts up when a CAN FD frame or an incorrect/corrupted CAN frame is received; counts down when a CAN frame is received properly (as specified in ISO 11898-6)
0	1	Error Counter counts down when correct CAN (incl. CAN FD) frame is received
1	1	Error Counter is and stays cleared to avoid an overflow during programming via CAN

The DIS_ERR_ CNT bit is automatically cleared at Tsilence ($t_{SILENCE}$) expiration.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

5.6.8 Clock and Data Recovery

In order to compensate possible deviations on the CAN oscillator frequency caused by assembly and lifetime effects, the device features an integrated clock and data recovery (CDR).

It is recommended to always enable the CDR feature during SWK operation.

5.6.8.1 Configuring the Clock Data Recovery for SWK

The Clock and Data Recovery can be optionally enabled or disabled with the CDR_EN bit in the SWK_CDR_CTRL1 SPI register. In case the feature is enabled, the CAN bit stream will be measured and the internal clock used for the CAN frame decoding will be updated accordingly.
Before the Clock and Data Recovery can be used it must be configured properly related to the used baud rate and filtering characteristics (see Chapter 5.6.8.2).

It is strongly recommended not to enable/disable the Clock Recovery during a active CAN Communication.

To ensure this, it is recommended to enable/disable it during CAN off (BUS_CTRL_0; CAN[2:0] = 000).

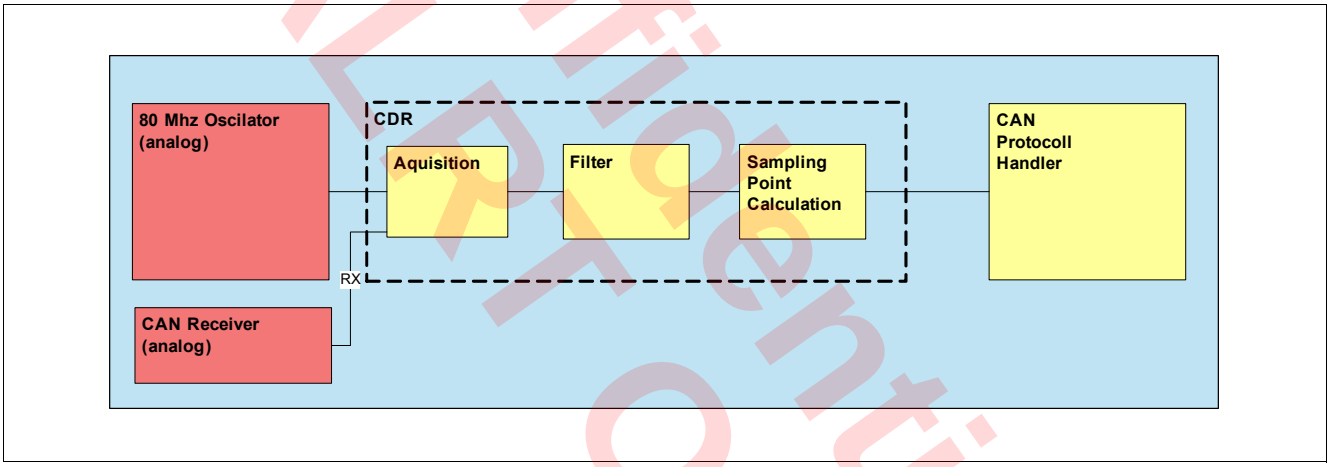

Figure 18 Clock and Data Recovery Block Diagram

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.6.8.2 Setup of Clock and Data Recovery

It is strongly recommended to enable the clock and data recovery feature only when the setup of the clock and data recovery is finished.

The following sequence should be followed for enabling the clock and data recovery feature:

- Step 1: Switch CAN to off and CDR_EN to off
  Write SPI Register BUS_CTRL_0 (CAN[2:0] = 000).
- Step 2: Configure CDR Input clock frequency
  Write SPI Register SWK_CDR_CTRL2 (SEL_OSC_CLK[1:0]).
- Step 3: Configure Bit timing Logic
  Write SPI Register SWK_BTL0_CTRL and adjust SWK_CDR_LIMIT_HIGH_CTRL and SWK_CDR_LIMIT_LOW_CTRL according to Table 37.
- Step 4: Enable Clock and Data Recovery
  Choose filter settings for Clock and Data recovery. Write SPI Register SWK_CDR_CTRL1 with CDR_EN = 1

Additional hints for the CDR configuration and operation:

- Even if the CDR is disabled, when the baud rate is changed, the settings of SEL_OSC_CLK in the register SWK_CDR_CTRL1 and SWK_BTL0_CTRL have to be updated accordingly,
- The SWK_CDR_LIMIT_HIGH_CTRL and SWK_CDR_LIMIT_LOW_CTRL registers have to be also updated when the baud rate or clock frequency is changed (the CDR is discarding all the acquisitions and looses all acquired information, if the limits are reached - the SWK_BTL0_CTRL value is reloaded as starting point for the next acquisitions)
- When updating the CDR registers, it is recommended to disable the CDR and to enable it again only after the new settings are updated,
- The SWK_BTL1_CTRL register represents the sampling point position. It is recommended to be used at default value: 11 0011 (~80%)

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5.6.9 Electrical Characteristics

Table 20 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; 4.75 V < VCAN < 5.25 V; R_L = 60Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin
(unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
CAN Partial Network Timing							
Timeout for bus inactivity	$t_{SILENCE}$	0.6	–	1.2	s	1)	P_5.13.1
Bus Bias reaction time	t_{bias}	–	–	250	µs	1)Load R_L = 60 Ω, C_L = 100 pF, C_{GND} = 100 pF	P_5.13.2
Wake-up reaction time (WUP or WUF)	$t_{WU_WUP/WUF}$	–	–	100	µs	1)2)3) Wake-up reaction time after a valid WUP or WUF;	P_5.13.3
Min. Bit Time	t_{Bit_min}	1	–	–	µs	1)4)	P_5.13.4
CAN FD Tolerance[5)]							
Dominant signals which are ignored (up to 2MBit/s)	$t_{FD_Glitch_4}$	0	–	5	%	6)7)of arbitration bit time; to be configured via FD_FILTER;	P_5.13.5
Dominant signals which are ignored (up to 5MBit/s)	$t_{FD_Glitch_10}$	0	–	2.5	%	6)8)of arbitration bit time; to be configured via FD_FILTER;	P_5.13.6
Signals which are detected as a dominant data bit after the FDF bit and before EOF bit (up to 2MBit/s)	$t_{FD_DOM_4}$	17.5	–	–	%	6)7)of arbitration bit time; to be configured via FD_FILTER;	P_5.13.7
Signals which are detected as a dominant data bit after the FDF bit and before EOF bit (up to 5MBit/s)	$t_{FD_DOM_10}$	8.75	–	–	%	6)8)of arbitration bit time; to be configured via FD_FILTER;	P_5.13.8

1) Not subject to production test, tolerance defined by internal oscillator tolerance
2) Wake-up is signalized via INTN pin activation in SBC Stop Mode and via VCC1 ramping up with wake from SBC Sleep Mode;
3) For WUP: time starts with end of last dominant phase of WUP; for WUF: time starts with end of CRC delimiter of the WUF
4) The minimum bit time corresponds to a maximum bit rate of 1 Mbit/s. The lower end of the bit rate depends on the protocol IC or the permanent dominant detection circuitry preventing a permanently dominant clamped bus.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

5) Applies for an arbitration rate of up to 500kbps until the FDF bit is detected.
6) Not subject to production test; specified by design.
7) A data phase bit rate less or equal to four times of the arbitration bit rate or 2 Mbit/s, whichever is lower.
8) A data phase bit rate less or equal to ten times of the arbitration bit rate or 5 Mbit/s, whichever is lower.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

6 Voltage Regulator 1

6.1 Block Description

The TLE9471-3ES has a SMPS step-down regulator integrated which is the main voltage regulator. The simplified block diagram is shown in Figure 19.

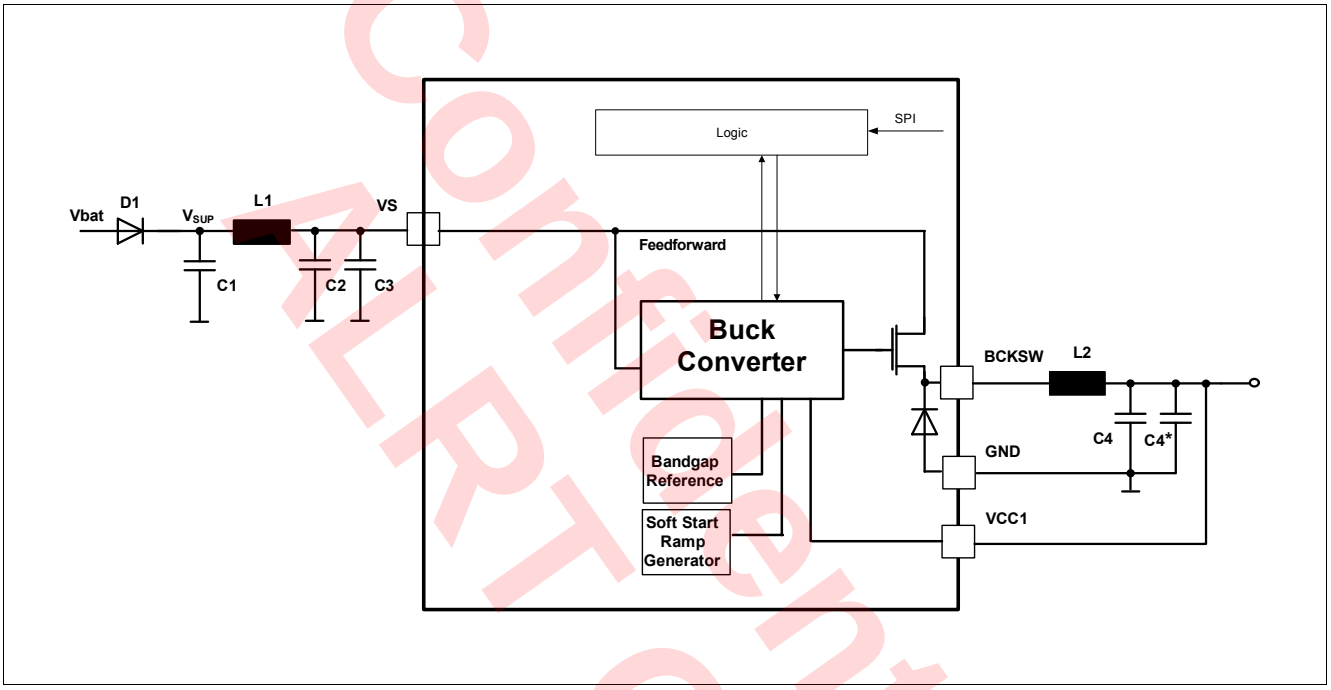

Figure 19 Simplified DC/DC Block Diagram

Functional features

- 5.0V SMPS (Step-Down) Buck regulator with integrated high-side power switching transistor and freewheeling diode
- PWM modulation for max current capability and 2% output voltage tolerance
- Up to 1% output voltage tolerance for a limited supply voltage and temperature range
- Integrated linear-mode low-power regulator to reduce the current consumption and 3% tolerance;
- Automatic transition between PWM modulation and low-power regulator;
- 100% Duty Cycle;
- Programmable switching frequency;
- Internal compensation;
- Integrated soft-start
- Undervoltage prewarning and detection with selectable reset thresholds
- Overvoltage detection
- Output current limit $I_{BCKSW,lim}$ configurabel via SPI
- Short circuit detection and switch off with undervoltage fail threshold, device enters SBC Fail-Safe Mode.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

6.2 Functional Description

The TLE9471-3ES has an integrated SMPS step-down (Buck) regulator which is intended as the main voltage regulator.

The Voltage Regulator 1 (switched supply output pin is BCKSW, the voltage feedback pin is VCC1) is “ON” in SBC Normal, SBC Stop and SBC Restart Mode and is disabled in SBC Sleep and in SBC Fail-Safe Mode.

The pin VCC1 is used as a feedback for the step-down converter.

Current Limitation Configurations:

The regulator can provide an output current up to $I_{BCKSW,lim}$. The current limitation threshold can be adjusted with the bits ICC1_LIM_ADJ. A soft-start feature is implemented that limits the current to the lowest value during start-up of VCC1 as long as RSTN is LOW. After t_{RD1} has expired, the default value will be resumed after power-up or the configured value after SBC Sleep- or Fail-Safe Mode.

Table 21 Current Limitation Configurations

SPI Setting ICC1_LIM_ADJ	Typ. Limitation Current	Note
‘00’	0.75 A	setting in case of lower load currents and smaller ext. components
‘01’	1.0 A	default value, recommended setting
‘10’	1.2 A	setting for maximum load currents
‘11’	1.5 A	setting not recommended -

6.2.1 Pulse With Modulation (PWM) and Spread Spectrum Modulation

The fixed frequency pulse width modulation is based on a peak current mode to have a fast reaction time and optimum load and line regulation. Buck regulator has a dedicated clock generation with a default frequency of typ. 2.2MHz (default values). The switching frequency can be adjusted depending on the application requirements via the SPI bits 2MHZ_FREQ.

A spread spectrum modulation of the integrated SMPS switching frequency is implemented for optimum EMC behavior. Enabling and configuring the spread spectrum modulation frequency is done via the SPI bits SS_MOD_FR.

6.2.2 Low-Power Mode Operation

For low-quiescent current reasons, a low-power linear mode regulator with a decreased tolerance (+/-3%) will be turned on in SBC Stop Mode if the load current on VCC1 falls below $I_{VCC1} > I_{BCKSW,Ipeak1,f}$ or $I_{BCKSW,Ipeak2,f}$.

6.2.3 PWM to Low-Power Mode Handover

If SBC Stop Mode is reached and the load current on VCC1 falls below the active peak threshold ($I_{BCKSW,Ipeak1,f}$ or $I_{BCKSW,Ipeak2,f}$), then the low-quiescent current mode is activated by disabling the switch-mode regulator.

If the load current on VCC1 exceeds $I_{VCC1} > I_{BCKSW,Ipeak1,r}$ or $I_{BCKSW,Ipeak2,r}$, then the switch-mode regulator will be also activated to support an optimum dynamic load behavior. The current consumption will then increase by typ. 3mA. The SBC Mode stays unchanged.

If the load current on VCC1 falls below the selected threshold ($I_{BCKSW,Ipeak1,f}$ or $I_{BCKSW,Ipeak2,f}$), then the low-quiescent current mode is resumed again by disabling the high-power mode regulator.

Two different active peak thresholds can be selected via SPI:

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

- I_PEAK_TH = ‘0’(default): the lower VCC1 active peak threshold 1 is selected with lowest quiescent current consumption in SBC Stop Mode ($I_{Stop_1,25}$, $I_{Stop_1,85}$);
- I_PEAK_TH = ‘1’: the higher VCC1 active peak threshold 2 is selected with an increased quiescent current consumption in SBC Stop Mode ($I_{Stop_2,25}$, $I_{Stop_2,85}$);

6.2.4 External Components Selection

The DC/DC module is designed in order to give as much as possible flexibility in the final application in terms of input and output voltage range, switching frequency. This reflects also in a large possible spread for system passive components (L-C output filter).

System stability is guaranteed in the suggested range of output components values listed in Table 22.

Table 22 External Components Selection Range

External Component	Min. Value	Characterization	Max. Value
Inductor (Lout)	6.8µH	10µH	47µH
Capacitor (Cout)	10µF	22µF	22µF
ESR Cout	-		100mΩ

Note: The above table specifies the range for each component individually. The proper combination of components has to be chosen to ensure the targeted performance depending on the buck switching frequency and load current profile. Above values are not subject to production test but specified by design.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

6.3 Electrical Characteristics

Table 23 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150° all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Regulated Voltage on VCC1 including Line and Load Regulation	V_{CC1_1}	4.9	5	5.1	V	Buck in PWM; 10µA < I_{VCC1} < 300mA	P_6.3.1
Regulated Voltage on VCC1 including Line and Load Regulation (Full Load Current Range)	V_{CC1_2}	4.9	5	5.1	V	Buck in PWM; 6V < VS < 28V; 10µA < I_{VCC1} < 500mA	P_6.3.24
Regulated Voltage on VCC1 including Line and Load Regulation (Higher Accuracy Range)	V_{CC1_3}	4.95	5	5.05	V	3)Buck in PWM 8V < VS < 18V; 25°C < Tj < 125°C; 20mA < I_{VCC1} < 300mA	P_6.3.3
Regulated Voltage on VCC1 including Line and Load Regulation (Low-Power Mode)	V_{CC1_4}	4.85	5	5.15	V	3)Stop Mode, 10µA < I_{VCC1} < I_PEAK_TH	P_6.3.4
Buck Drop-Out Voltage	$V_{BUCK,D1}$	-	-	500	mV	Buck in PWM I_{VCC1} = 300mA, V_S = 5V	P_6.3.7
Buck Switching Frequency 1	$f_{BUCK,SW1}$	1.62	1.8	1.98	MHz	1)2MHZ_FREQ ='000'	P_6.3.10
Buck Switching Frequency 2	$f_{BUCK,SW2}$	1.80	2.0	2.20	MHz	1)2MHZ_FREQ ='001'	P_6.3.11
Buck Switching Frequency 3 (default value)	$f_{BUCK,SW3}$	1.98	2.2	2.42	MHz	1)2MHZ_FREQ ='010'	P_6.3.12
Buck Switching Frequency 4	$f_{BUCK,SW4}$	2.16	2.4	2.64	MHz	1)2MHZ_FREQ ='011'	P_6.3.13
Overcurrent Limitation (ICC1_LIM_ADJ= '01')	I_{BCKSW,lim_01}	0.8	1.0	1.25	A	3)2)current flowing out of pin, V_{CC1} = 0V, V_S > 6V, default value	P_6.3.14

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 23 Electrical Characteristics (cont'd)

V_S = 5.5 V to 28 V; T_j = -40°C to +150° all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Overcurrent Limitation (ICC1_LIM_ADJ= '00')	I_{BCKSW,lim_00}	0.6	0.75	0.95	A	3)2)current flowing out of pin, V_{CC1} = 0V, V_S > 6V	P_6.3.21
Overcurrent Limitation (ICC1_LIM_ADJ= '10')	I_{BCKSW,lim_10}	0.96	1.25	1.60	A	3)2)current flowing out of pin, V_{CC1} = 0V, V_S > 6V	P_6.3.22
Overcurrent Limitation (ICC1_LIM_ADJ= '11')	I_{BCKSW,lim_11}	1.1	1.5	1.95	A	3)2)current flowing out of pin, V_{CC1} = 0V, V_S > 6V	P_6.3.23
VCC1 Active Peak Threshold 1 (Transition threshold between low-power and high-power mode regulator)	$I_{BCKSW,Ipeak1,r}$	–	3.25	5.0	mA	3) I_{CC1} rising; V_S = 13.5V; I_PEAK_TH = '0'	P_6.3.18
VCC1 Active Peak Threshold 1 (Transition threshold between high-power and low-power mode regulator)	$I_{BCKSW,Ipeak1,f}$	1.2	1.7	–	mA	3) I_{CC1} falling; V_S = 13.5V; I_PEAK_TH = '0'	P_6.3.15
VCC1 Active Peak Threshold 2 (Transition threshold between low-power and high-power mode regulator)	$I_{BCKSW,Ipeak2,r}$	–	6.25	10.0	mA	3) I_{CC1} rising; V_S = 13.5V; I_PEAK_TH = '1'	P_6.3.16
VCC1 Active Peak Threshold 2 (Transition threshold between high-power and low-power mode regulator)	$I_{BCKSW,Ipeak2,f}$	2.4	3.5	–	mA	3) I_{CC1} falling; V_S = 13.5V; I_PEAK_TH = '1'	P_6.3.17

1) Not subject to production test, tolerance defined by internal oscillator tolerance.
2) Current limitation value is max. 20% higher for $V_{POR,f} < V_S < 6$ V to optimize low-drop operation behavior.
3) Not subject to production test, specified by design.

Confidential for ALRT Only

7 Voltage Regulator 2

7.1 Block Description

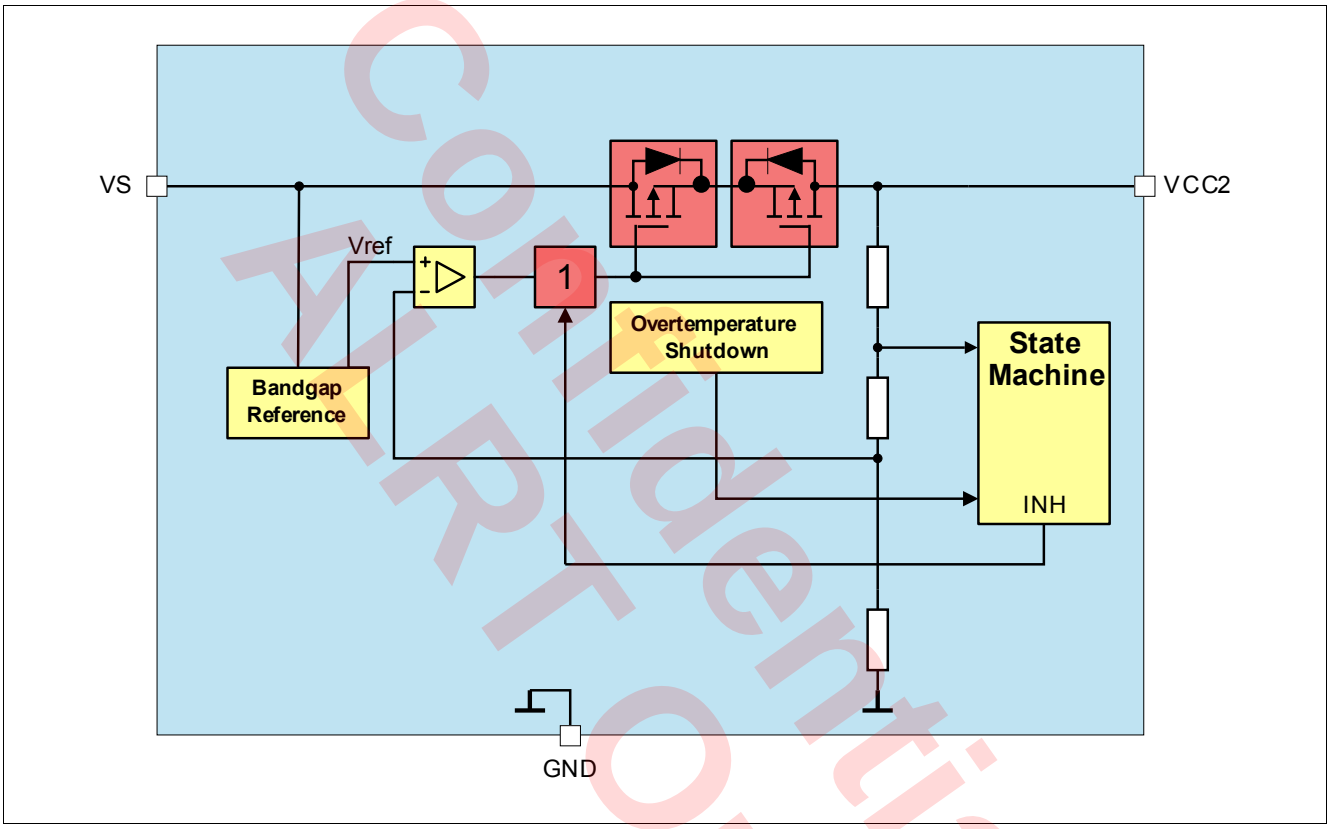

Figure 20 Module Block Diagram

Functional Features

- 5 V low-drop voltage regulator
- Protected against short to battery voltage, e.g. for off-board sensor supply
- Can also be used for CAN supply
- VCC2 undervoltage monitoring. Please refer to Chapter 12.7 for more information
- Can be active in SBC Normal, SBC Stop, and SBC Sleep Mode (not SBC Fail-Safe Mode)
- VCC2 switch off after entering SBC Restart Mode. Switch off is latched, LDO must be enabled via SPI after shutdown.
- Overtemperature protection
- ≥ 470nF ceramic capacitor at output voltage for stability, with ESR < 1Ω @ f = 10 kHz, to achieve the voltage regulator control loop stability based on the safe phase margin (bode diagram).
- Output current capability up to $I_{VCC2,lim}$.

Confidential for ALRT Only

Confidential for ALRT Only

7.2 Functional Description

In SBC Normal Mode VCC2 can be switched on or off via SPI.

For SBC Stop- or Sleep Mode, the VCC2 has to be switched on or off in SBC Normal Mode before entering the respective SBC mode. The regulator is automatically switched off in SBC Restart Mode

The regulator can provide an output current up to $I_{VCC2,lim}$.

For low-quiescent current reasons, the output voltage tolerance is decreased in SBC Stop and Sleep Mode (if enabled) because a low-power mode regulator with a lower accuracy ($V_{CC2,out4}$) will be active for small loads. If the load current on VCC2 exceeds $I_{VCC2} > I_{VCC2,Ipeak,r}$ then the high-power mode regulator will also be enabled to support an optimum dynamic load behavior. The current consumption will then increase by typ. 2.9mA. The SBC Mode stays unchanged.
If the load current on VCC2 falls below the threshold ($I_{VCC2} < I_{VCC2,Ipeak,f}$), then the low-quiescent current mode is resumed again by disabling the high-power mode regulator.
Both regulators are active in SBC Normal Mode.

Note: If the VCC2 output voltage is supplying external off-board loads, the application must consider the series resonance circuit built by cable inductance and decoupling capacitor at the load. Sufficient damping must be provided.

Note: To avoid excessive repetitive short-circuit conditions, It is recommended to detect the shutdown reason for VCC2 and keep the regulator off after multiple over-temperature shutdowns.

7.2.1 Short to Battery Protection

The output stage is protected for short to VBAT. No inverse current will flow if the voltage on VCC2 is higher than the nominal output voltage.

Confidential for ALRT Only

7.3 Electrical Characteristics

Table 24 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Output Voltage Including Line and Load Regulation	$V_{CC2,out1}$	4.9	5.0	5.1	V	1)SBC Normal Mode; 10µA < I_{VCC2} < 100mA 6V < V_S < 28V	P_8.3.1
Output Voltage Including Line and Load Regulation (Full Load Current Range)	$V_{CC2,out2}$	4.9	5.0	5.1	V	1)SBC Normal Mode; 10µA < I_{VCC2} < 45mA	P_8.3.2
Output Voltage Including Line and Load Regulation (Higher Accuracy Range)	$V_{CC2,out3}$	4.95	5.0	5.05	V	2)SBC Normal Mode; 10µA < I_{VCC2} < 5mA 8V < V_S < 18V	P_8.3.3
Output Voltage Including Line and Load Regulation (Low-Power Mode)	$V_{CC2,out4}$	4.9	5.05	5.2	V	SBC Stop / Sleep Mode; 10µA < I_{VCC2} < $I_{VCC2,Ipeak}$	P_8.3.4
Output Drop Voltage	$V_{CC2,d1}$	–	–	500	mV	I_{VCC2} = 30mA V_S = 5V	P_8.3.5
VCC2 Active Peak Threshold (Transition threshold between low-power and high-power mode regulator)	$I_{VCC2,Ipeak,r}$	2.3	3.3	4.2	mA	2)I_{CC2} rising; V_S = 13.5V;	P_8.3.6
VCC2 Active Peak Threshold (Transition threshold between high-power and low-power mode regulator)	$I_{VCC2,Ipeak,f}$	1.4	2.2	3.2	mA	2)I_{CC2} falling; V_S = 13.5V;	P_8.3.7
Overcurrent limitation	$I_{VCC2,lim}$	100	–	450 2)	mA	current flowing out of pin, V_{CC2} = 0V	P_8.3.8

1) In SBC Stop Mode, the specified output voltage tolerance applies when I_{VCC2} has exceeded the selected active peak threshold ($I_{VCC2,Ipeak,r}$) but with increased current consumption.

2) Not subject to production test, specified by design.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

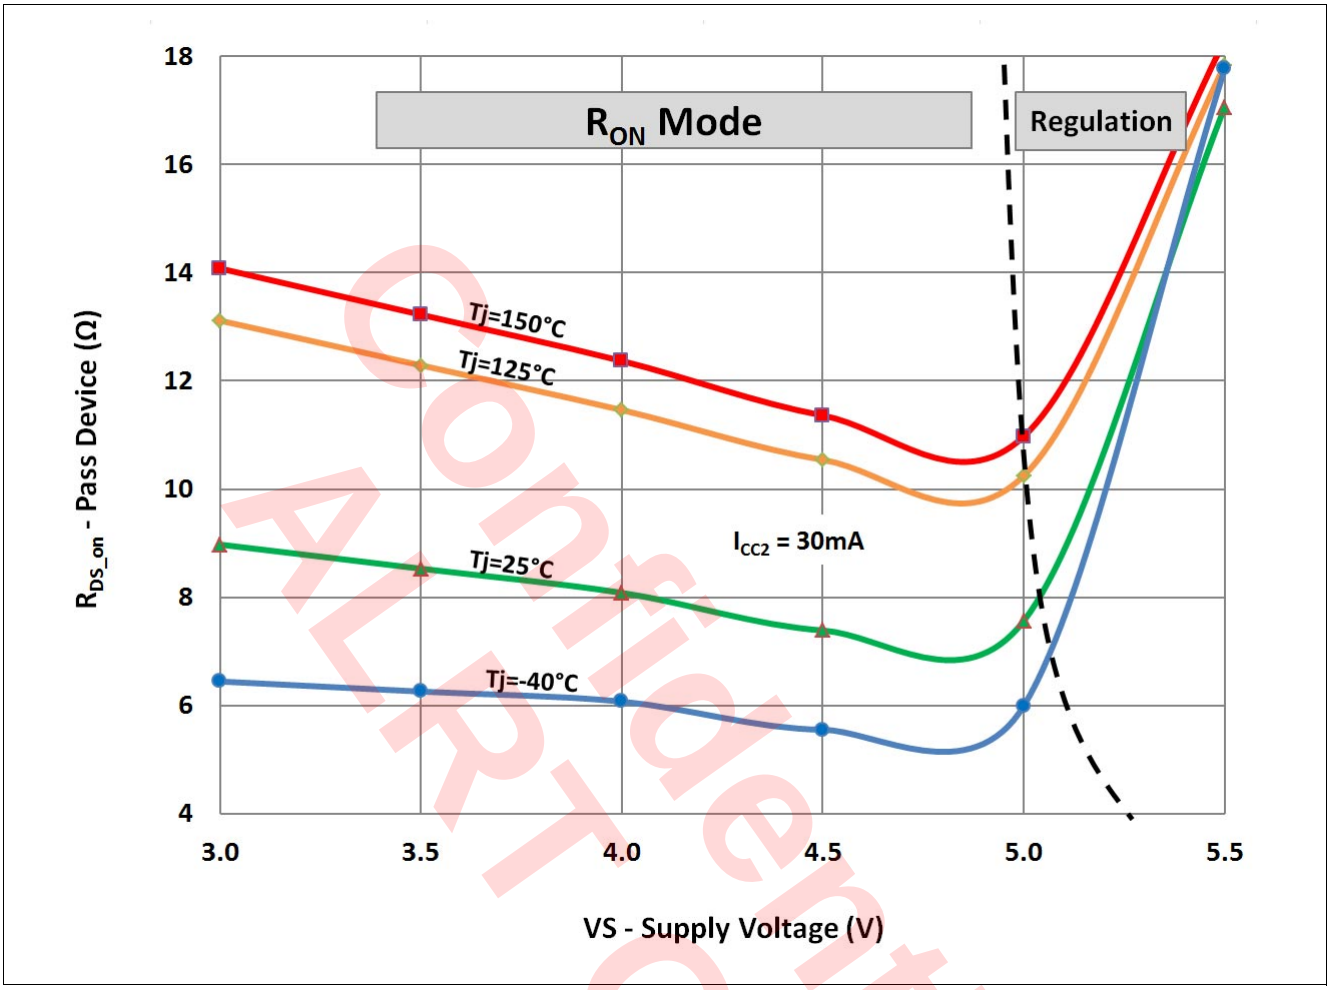

Figure 21 Typical on-resistance of VCC2 pass device during low drop operation for I_{CC2} = 30mA

Confidential for ALRT Only

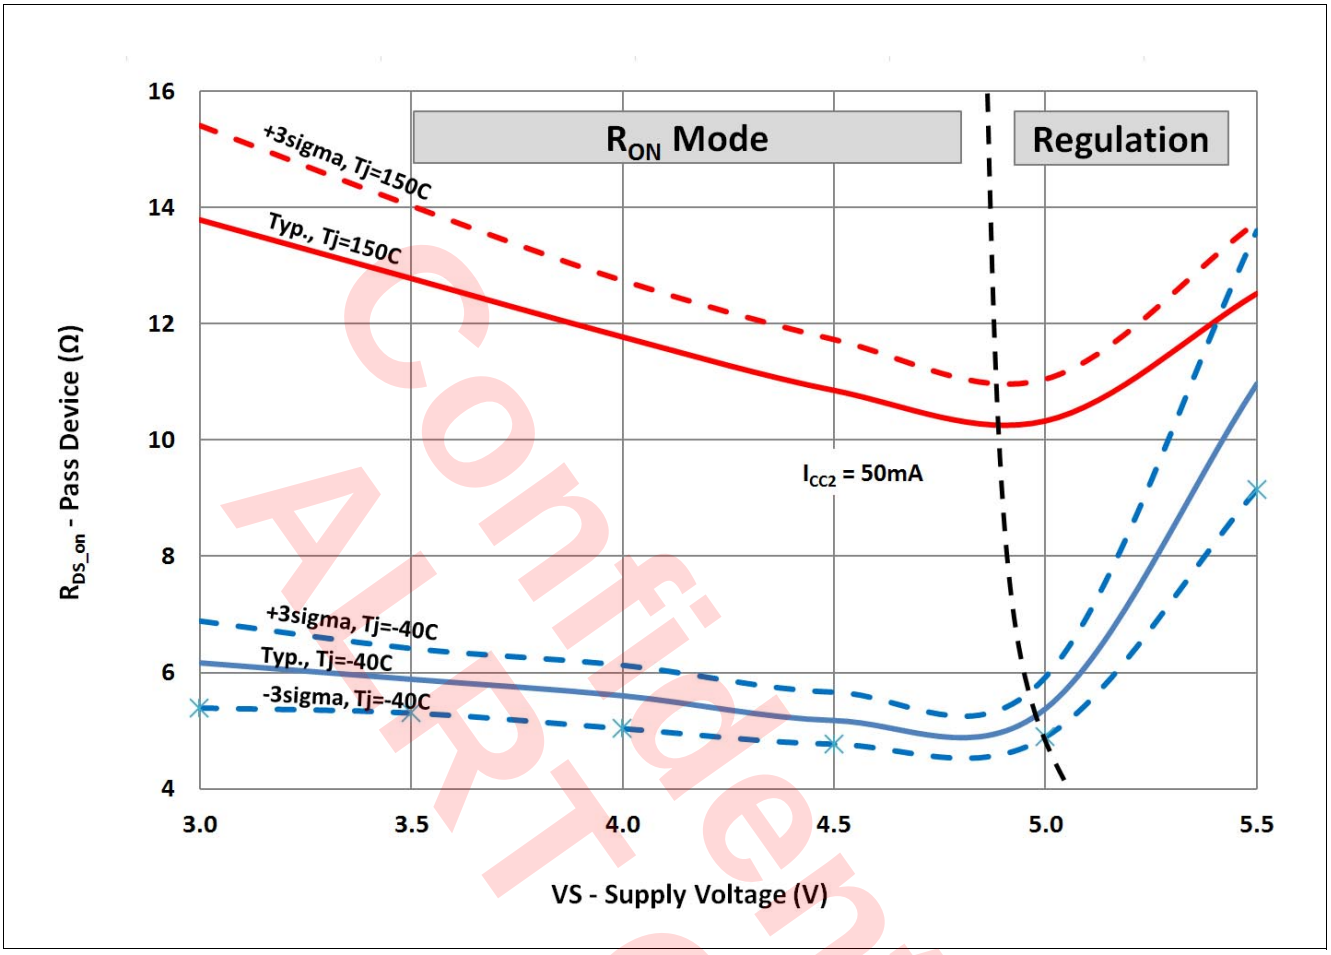

Figure 22 On-resistance range of VCC2 pass device during low drop operation for I_{CC2} = 50mA

Confidential for ALRT Only

8 High Speed CAN Transceiver

8.1 Block Description

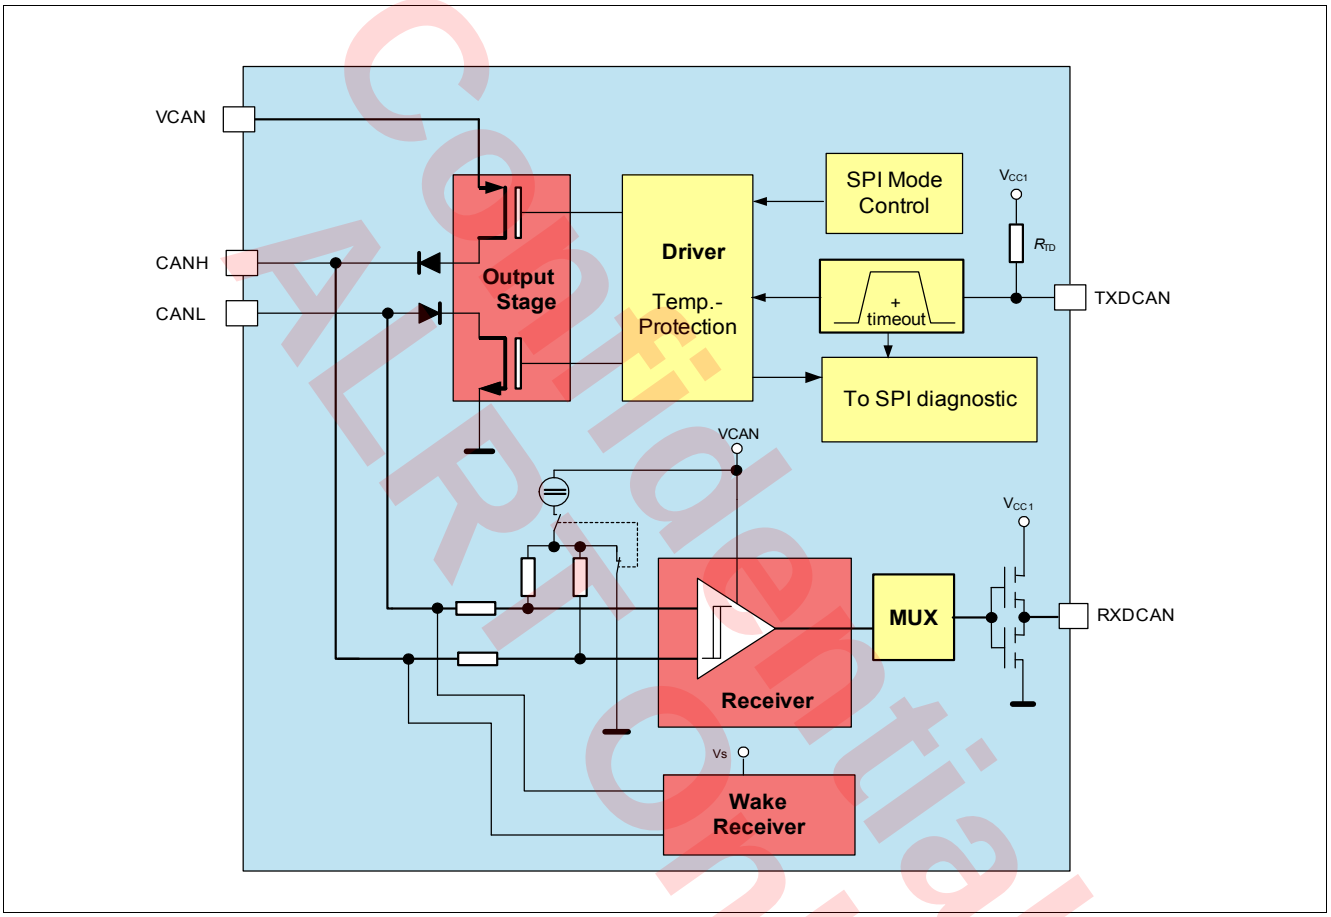

Figure 23 Functional Block Diagram

8.2 Functional Description

The Controller Area Network (CAN) transceiver part of the SBC provides High-Speed (HS) differential mode data transmission (up to 2Mbaud) and reception in automotive and industrial applications. It works as an interface between the CAN protocol controller and the physical bus lines compatible to ISO 11898-2:2016 and SAE J2284.

The CAN transceiver offers low power modes to reduce current consumption. This supports networks with partially powered down nodes. To support software diagnostic functions, a CAN Receive-only Mode is implemented.

It is designed to provide excellent passive behavior when the transceiver is switched off (mixed networks, clamp 15/30 applications).

A wake-up from the CAN Wake capable Mode is possible via a message on the bus. Thus, the microcontroller can be powered down or idled and will be woken up by the CAN bus activities.

The CAN transceiver is designed to withstand the severe conditions of automotive applications and to support 12V applications.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

The transceiver can also be configured to wake capable in order to save current and to ensure a safe transition from Normal to Sleep Mode (to avoid losing messages).

Figure 24 shows the possible transceiver mode transition when changing the SBC mode.

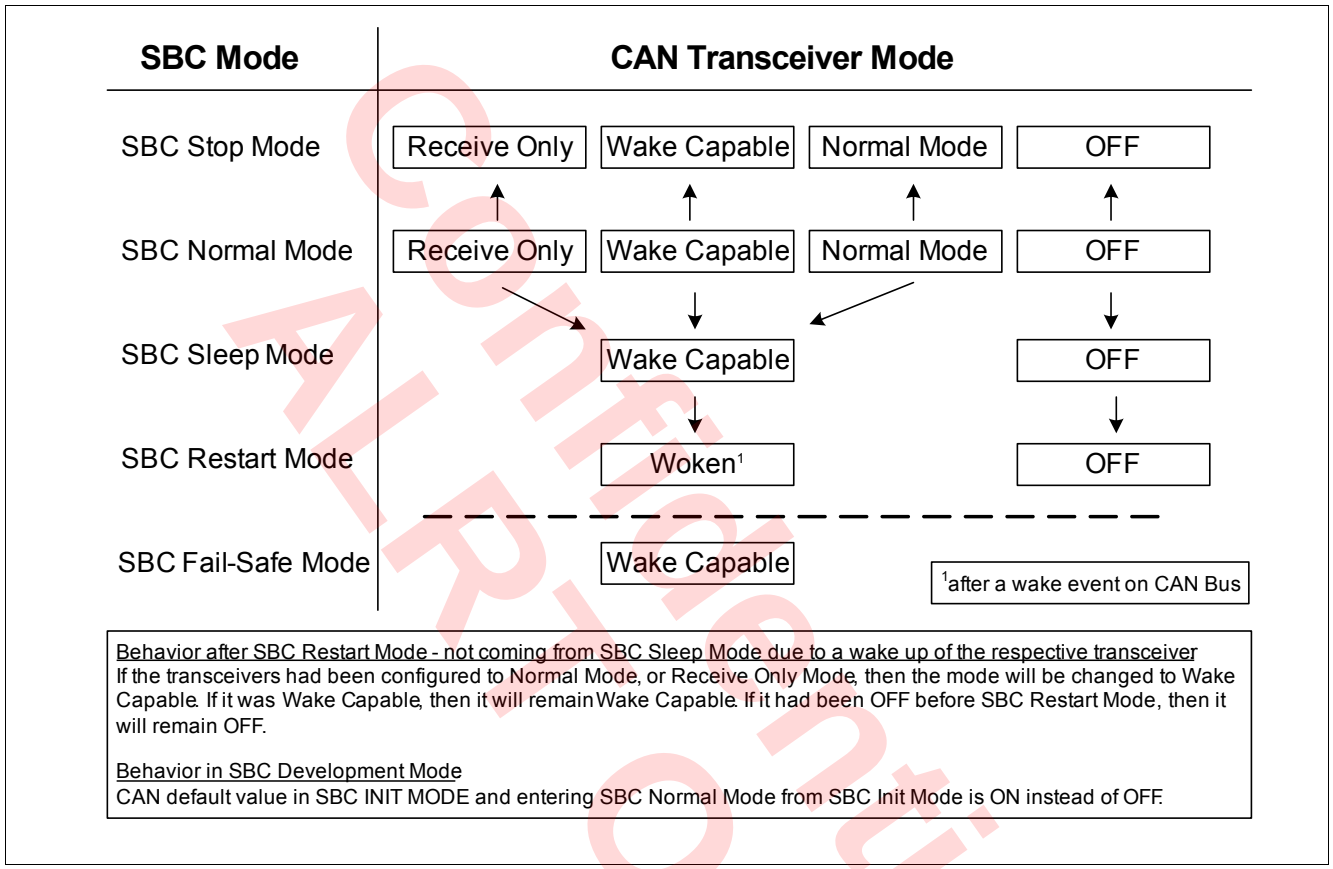

Figure 24 CAN Mode Control Diagram

CAN FD Support

CAN FD stands for 'CAN with Flexible Data Rate'. It is based on the well established CAN protocol as specified in ISO 11898-1. CAN FD still uses the CAN bus arbitration method. The benefit is that the bit rate can be increased by switching to a shorter bit time at the end of the arbitration process and then to return to the longer bit time at the CRC delimiter, before the receivers transmit their acknowledge bits. See also Figure 25. In addition, the effective data rate is increased by allowing longer data fields. CAN FD allows the transmission of up to 64 data bytes compared to the 8 data bytes from the standard CAN.

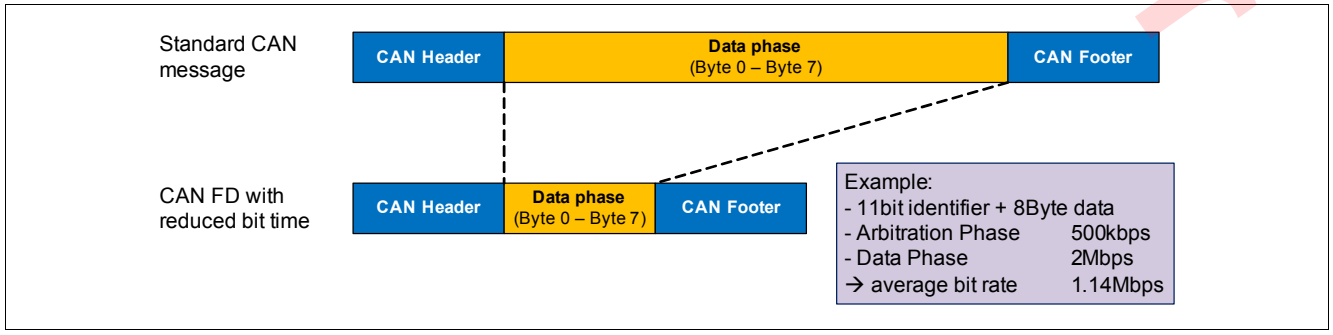

Figure 25 Bite Rate Increase with CAN FD vs. Standard CAN

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Not only the physical layer must support CAN FD but also the CAN controller. In case the CAN controller is not able to support CAN FD then the respective CAN node must at least tolerate CAN FD communication. This CAN FD tolerant mode is realized in the physical layer.

8.2.1 CAN OFF Mode

The CAN OFF Mode is the default mode after power-up of the SBC. It is available in all SBC Modes and is intended to completely stop CAN activities or when CAN communication is not needed. In CAN OFF Mode, a wake-up event on the bus will be ignored.

8.2.2 CAN Normal Mode

The CAN Transceiver is enabled via SPI. CAN Normal Mode is designed for normal data transmission/reception within the HS CAN network. The Mode is available in SBC Normal Mode.

Transmission:
The signal from the microcontroller is applied to the TXDCAN input of the SBC. The bus driver switches the CANH/L output stages to transfer this input signal to the CAN bus lines.

Enabling sequence:
The CAN transceiver requires an enabling time $t_{CAN,EN}$ before a message can be sent on the bus. This means that the TXDCAN signal can only be pulled low after the enabling time. If this is not ensured, then the TXDCAN needs to be set back to high (=recessive) until the enabling time is completed. Only the next dominant bit will be transmitted on the bus. Figure 26 shows different scenarios and explanations for CAN enabling.

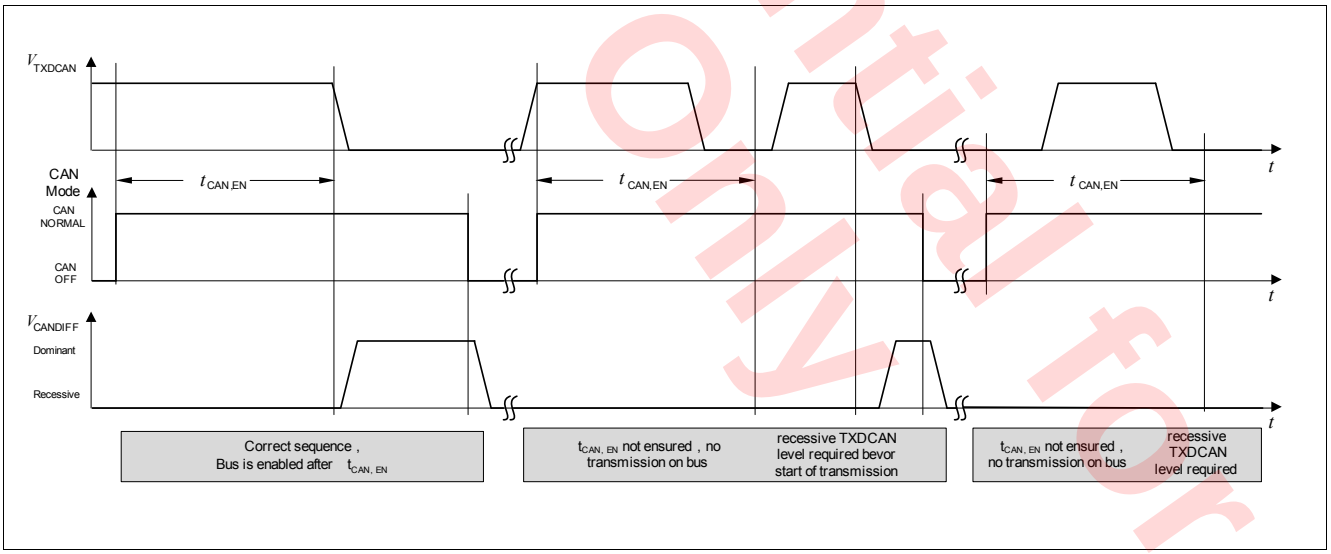

Figure 26 CAN Transceiver Enabling Sequence

Reduced Electromagnetic Emission:
To reduce electromagnetic emissions (EME), the bus driver controls CANH/L slopes symmetrically.

Reception:
Analog CAN bus signals are converted into digital signals at RXDCAN via the differential input receiver.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

8.2.3 CAN Receive Only Mode

In CAN Receive Only Mode (RX only), the driver stage is de-activated but reception is still operational. This mode is accessible by an SPI command in SBC Normal Mode and in SBC Stop Mode.

Note: The transceiver is still properly working in Receive Only mode even if VCAN is not available because of an independent receiver supply.

8.2.4 CAN Wake Capable Mode

This mode can be used in SBC Stop, Sleep, Restart and Normal Mode by programming via SPI and it is used to monitor bus activities. It is automatically accessed in SBC Fail-Safe Mode. A wake-up signal on the bus results in a change of behavior of the SBC, as described in Table 25. As a signalization to the microcontroller, the RXDCAN pin is set low and will stay low until the CAN transceiver is changed to any other mode. After a wake-up event, the transceiver can be switched to CAN Normal Mode via SPI for bus communication.

As shown in Figure 27, a wake-up pattern (WUP) is signaled on the bus by two consecutive dominant bus levels for at least t_{Wake1} (wake-up time) and less than t_{Wake2}, each separated by a recessive bus level of greater than t_{Wake1} and shorter than t_{Wake2}.

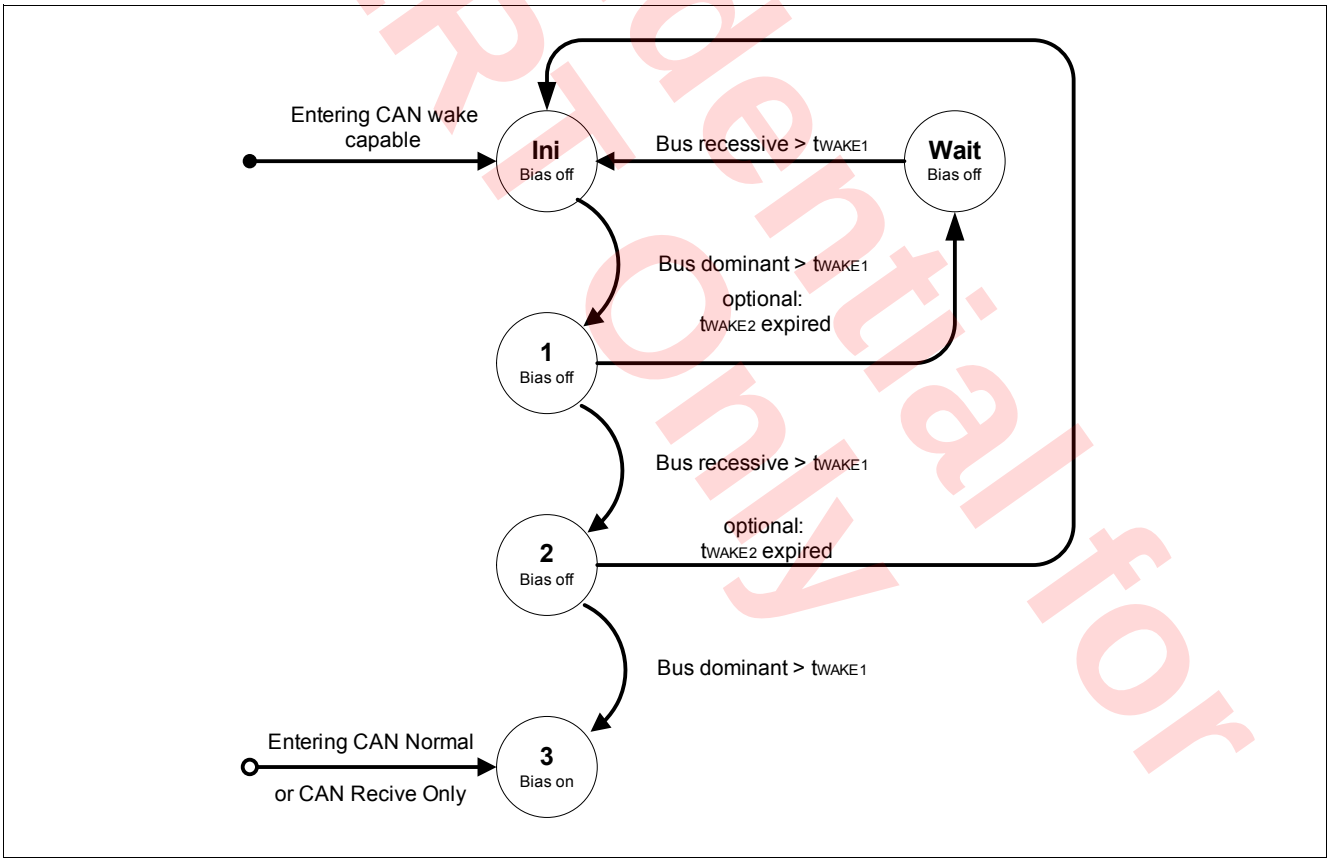

Figure 27 CAN Wake-up Pattern Detection according to the Definition in ISO 11898-2

Rearming the Transceiver for Wake Capability:

After a BUS wake-up event, the transceiver is woken. However, the CAN transceiver mode bits will still show wake capable (='01') so that the RXDCAN signal will be pulled low. There are two possibilities how the CAN transceiver's wake capable mode is enabled again after a wake-up event:

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

- The CAN transceiver mode must be toggled, i.e. switched from Wake Capable Mode to CAN Normal Mode, CAN Receive Only Mode or CAN Off, before switching to CAN Wake Capable Mode again.
- Rearming is done automatically when the SBC is changed to SBC Stop, SBC Sleep, or SBC Fail-Safe Mode to ensure wake-up capability.

Wake-Up in SBC Stop and Normal Mode:

In SBC Stop Mode, if a wake-up is detected, it is always signaled by the INTN output and in the WK_STAT_0 SPI register. It is also signaled by RXDCAN pulled to low. The same applies for the SBC Normal Mode. The microcontroller should set the device from SBC Stop Mode to SBC Normal Mode, there is no automatic transition to Normal Mode.

For functional safety reasons, the watchdog will be automatically enabled in SBC Stop Mode after a Bus wake-up event in case it was disabled before (if bit WD_EN_ WK_BUS was configured to high before).

Wake-Up in SBC Sleep Mode:

Wake-up is possible via a CAN message. The wake-up automatically transfers the SBC into the SBC Restart Mode and from there to Normal Mode the corresponding RXDCAN pin is set to low. The microcontroller is able to detect the low signal on RXDCAN and to read the wake source out of the WK_STAT_0 register via SPI. No interrupt is generated when coming out of Sleep Mode. The microcontroller can now for example switch the CAN transceiver into CAN Normal Mode via SPI to start communication.

Table 25 Action due to CAN Bus Wake-Up

SBC Mode	SBC Mode after Wake	VCC1	INTN	RXDCAN
Normal Mode	Normal Mode	On	Low	Low
Stop Mode	Stop Mode	On	Low	Low
Sleep Mode	Restart Mode	Ramping Up	High	Low
Restart Mode	Restart Mode	On	High	Low
Fail-Safe Mode	Restart Mode	Ramping Up	High	Low

8.2.5 CAN Bus termination

In accordance with the CAN configuration, four types of bus terminations are allowed:

- CAN normal mode: VCAN/2 termination;
- CAN Receive only mode: VCAN/2 termination in case that VCAN is nominal supply; when VCAN UV is detected, the termination is 2.5V;
- CAN Wake capable: GND termination: after wake-up, the termination is 2.5V;
- CAN OFF: no termination necessary (bus floating).

When entering CAN wake capable mode the termination is only connected to GND after the t_silence time has expired.

8.2.6 TXD Time-out Feature

If the TXDCAN signal is dominant for a time $t > t_{TXDCAN_TO}$, in CAN Normal Mode, the TXDCAN time-out function deactivates the transmission of the signal at the bus setting the TXDCAN pin to recessive. This is implemented to prevent the bus from being blocked permanently due to an error. The transmitter is disabled and thus switched to recessive state. The CAN SPI control bits (CAN on BUS_CTRL_0) remain unchanged and the failure

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

is stored in the SPI flag CAN_FAIL. The CAN transmitter stage is activated again after the dominant time-out condition is removed and the transceiver is automatically switched back to CAN Normal Mode.

8.2.7 Bus Dominant Clamping

If the HS CAN bus signal is dominant for a time $t > t_{BUS_CAN_TO}$, in CAN Normal and Receive Only Mode a bus dominant clamping is detected and the SPI bit CAN_FAIL is set. The transceiver configuration stays unchanged. In order to avoid that a bus dominant clamping is detected due to a TXD time-out the bus dominant clamping filter time $t_{BUS_CAN_TO} > t_{TXDCAN_TO}$.

8.2.8 Undervoltage Detection

The voltage at the CAN supply pin is monitored in CAN Normal and Receive Only Mode. In case of VCAN undervoltage a signalization via SPI bit VCAN_UV is triggered and the TLE9471-3ES disables the transmitter stage. If the CAN supply reaches a higher level than the undervoltage detection threshold (VCAN > $V_{CAN_UV,r}$), the transceiver is automatically switched back to CAN Normal Mode.

The undervoltage detection is enabled if the mode bit CAN_1 = ‘1’, i.e. in CAN Normal or CAN Receive Only Mode.

Confidential for ALRT Only

8.3 Electrical Characteristics

Table 26 Electrical Characteristics

T_j = -40°C to +150°; V_S = 5.5 V to 28 V; <Times-italic.normal>V_{CAN} = 4.75 V to 5.25 V; RL = 60Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
CAN Bus Receiver							
Differential Receiver Threshold Voltage, recessive to dominant edge	V_{diff,rd_N}	–	0.80	0.90	V	$V_{diff} = V_{CANH} - V_{CANL}$; -12V ≤ V_{CM}(CAN) ≤ 12V; 0.9V ≤ V_{diff,D_Range} ≤ 8V; CAN Normal Mode	P_9.3.2
Differential Receiver Threshold Voltage, dominant to recessive edge	V_{diff,dr_N}	0.50	0.60	–	V	$V_{diff} = V_{CANH} - V_{CANL}$; -12V ≤ V_{CM}(CAN) ≤ 12V; -3V ≤ V_{diff,D_Range} ≤ 0.5V; CAN Normal Mode	P_9.3.3
Common Mode Range	CMR	-12	–	12	V	3)	P_9.3.4
CANH, CANL Input Resistance	R_{in}	20	40	50	kΩ	CAN Normal / Wake Capable Mode; Recessive state; -2 V ≤ $V_{CANL/H}$ ≤ +7 V	P_9.3.5
Differential Input Resistance	R_{in_diff}	40	80	100	kΩ	CAN Normal / Wake Capable Mode; Recessive state; -2 V ≤ $V_{CANL/H}$ ≤ +7 V	P_9.3.6
Input Resistance Deviation between CANH and CANL	DR_i	-3	–	3	%	3)Recessive state $V_{CANL} = V_{CANL/H}$ = 5V	P_9.3.7
Input Capacitance CANH, CANL versus GND	C_{in}	–	20	40	pF	3)V_{TXDCAN} = 5V	P_9.3.8
Differential Input Capacitance	C_{in_diff}	–	10	20	pF	3)V_{TXDCAN} = 5V	P_9.3.9
Wake-up Receiver Threshold Voltage, recessive to dominant edge	$V_{diff,\ rd_W}$	–	0.8	1.15	V	-12V ≤ V_{CM}(CAN) ≤ 12V; 1.15V ≤ V_{diff,D_Range} ≤ 8V; CAN Wake Capable Mode	P_9.3.10
Wake-up Receiver Threshold Voltage, dominant to recessive edge	$V_{diff,\ dr_W}$	0.4	0.7	–	V	-12V ≤ V_{CM}(CAN) ≤ 12V; -3V ≤ V_{diff,D_Range} ≤ 0.4V; CAN Wake Capable Mode	P_9.3.11
CAN Bus Transmitter							
CANH/CANL Recessive Output Voltage (CAN Normal Mode)	V_{CANL/H_NM}	2.0	–	3.0	V	CAN Normal Mode $V_{TXDCAN} = V_{cc1}$; no load	P_9.3.12

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 26 Electrical Characteristics (cont'd)

T_j = -40°C to +150°; V_S = 5.5 V to 28 V; <Times-italic.normal>V_{CAN} = 4.75 V to 5.25 V; RL = 60Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
CANH/CANL Recessive Output Voltage (CAN Wake Capable Mode)	V_{CANL/H_LP}	-0.1	–	0.1	V	CAN Wake Capable Mode; $V_{TXDCAN} = V_{cc1}$; no load	P_9.3.13
CANH, CANL Recessive Output Voltage Difference $V_{diff} = V_{CANH} - V_{CANL}$ (CAN Normal Mode)	$V_{diff_r_N}$	-500	–	50	mV	CAN Normal Mode; $V_{TXDCAN} = V_{cc1}$; no load	P_9.3.14
CANH, CANL Recessive Output Voltage Difference $V_{diff} = V_{CANH} - V_{CANL}$ (CAN Wake Capable Mode)	$V_{diff_r_W}$	-200	–	50	mV	CAN Wake Capable Mode; $V_{TXDCAN} = V_{cc1}$; no load	P_9.3.15
CANL Dominant Output Voltage	V_{CANL}	0.5	–	2.25	V	CAN Normal Mode; V_{TXDCAN} = 0V; V_{CAN} = 5V; 50Ω ≤ R_L ≤ 65Ω	P_9.3.16
CANH Dominant Output Voltage	V_{CANH}	2.75	–	4.5	V	CAN Normal Mode; V_{TXDCAN} = 0V; V_{CAN} = 5V; 50Ω ≤ R_L ≤ 65Ω	P_9.3.17
CANH, CANL Dominant Output Voltage Difference $V_{diff} = V_{CANH} - V_{CANL}$	$V_{diff_d_N}$	1.5	–	3.0	V	CAN Normal Mode; V_{TXDCAN} = 0V; V_{CAN} = 5V; 50Ω ≤ R_L ≤ 65Ω	P_9.3.18
CANH, CANL Dominant Output Voltage Difference (resistance during arbitration) $V_{diff} = V_{CANH} - V_{CANL}$	$V_{diff_d_N}$	1.5	–	5.0	V	[3)]CAN Normal Mode; V_{TXDCAN} = 0V; V_{CAN} = 5V; R_L = 2240Ω	P_9.3.51
CANH, CANL Dominant Output Voltage Difference (extended bus load range) $V_{diff} = V_{CANH} - V_{CANL}$	$V_{diff_d_N}$	1.4	–	3.3	V	[3)]CAN Normal Mode; V_{TXDCAN} = 0V; V_{CAN} = 5V; 45Ω ≤ R_L ≤ 70Ω	P_9.3.52
Driver Symmetry $V_{SYM} = V_{CANH} + V_{CANL}$	V_{SYM}	4.5	–	5.5	V	[1)]CAN Normal Mode; V_{TXDCAN} = 0V / 5V; V_{CAN} = 5V; C_{SPLIT} = 4.7nF; 50Ω ≤ R_L ≤ 60Ω;	P_9.3.19

Confidential for ALRT Only

Table 26 Electrical Characteristics (cont'd)

T_j = -40°C to +150°; V_S = 5.5 V to 28 V; <Times-italic.normal>V_{CAN} = 4.75 V to 5.25 V; RL = 60Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
CANH Short Circuit Current (New ISO requirement)	I_{CANHsc}	-100	-80	-50	mA	CAN Normal Mode; $V_{CANHshort}$ = -3 V	P_9.3.20
CANL Short Circuit Current (New ISO requirement)	I_{CANLsc}	50	80	100	mA	CAN Normal Mode; $V_{CANLshort}$ = 18 V;	P_9.3.21
Leakage Current	$I_{CANH,lk}$ $I_{CANL,lk}$	–	2	5	µA	$V_S = V_{CAN}$ = 0V; 0V ≤ $V_{CANH,L}$ ≤ 5V; [2] R_{test} = 0 / 47kΩ	P_9.3.22
Receiver Output RXDCAN							
High level Output Voltage	$V_{RXDCAN,H}$	0.8 × V_{CC1}	–	–	V	CAN Normal Mode; I_{RXDCAN} = -2 mA	P_9.3.23
Low Level Output Voltage	$V_{RXDCAN,L}$	–	–	0.2 × V_{cc1}	V	CAN Normal Mode; I_{RXDCAN} = 2 mA	P_9.3.24
Transmission Input TXDCAN							
High Level Input Voltage Threshold	$V_{TXDCAN,H}$	–	–	0.7 × V_{cc1}	V	CAN Normal Mode; recessive state	P_9.3.25
Low Level Input Voltage Threshold	$V_{TXDCAN,L}$	0.3 × V_{cc1}	–	–	V	CAN Normal Mode; dominant state	P_9.3.26
TXDCAN Input Hysteresis	$V_{TXDCAN,hys}$	0.08 × V_{cc1}	0.12 × V_{cc1}	0.5 × V_{cc1}	mV	[3]	P_9.3.27
TXDCAN Pull-up Resistance	R_{TXDCAN}	25	40	75	kΩ	-	P_9.3.28
CAN Transceiver Enabling Time	$t_{CAN,EN}$	8	12	18	µs	[7] CSN = high to first valid transmitted TXDCAN dominant	P_9.3.29
Dynamic CAN-Transceiver Characteristics							
Min. Dominant Time for Bus Wake-up	t_{Wake1}	0.5	1.2	1.8	µs	-12V ≤ V_{CM}(CAN) ≤ 12V; CAN Wake capable Mode	P_9.3.53
Wake-up Time-out, Recessive Bus	t_{Wake2}	0.8	–	10	ms	[7]CAN Wake capable Mode	P_9.3.31
Wake-up reaction time (WUP or WUF)	$t_{WU_WUP/WUF}$	–	–	100	µs	[7][4][5] Wake-up reaction time after a valid WUP or WUF;	P_9.3.54
Loop delay (recessive to dominant)	$t_{LOOP,f}$	–	150	255	ns	[1]CAN Normal Mode; C_L = 100pF; R_L = 60 Ω; V_{CAN} = 5V; C_{RXDCAN} = 15 pF	P_9.3.32

Confidential for ALRT Only

Table 26 Electrical Characteristics (cont'd)

T_j = -40°C to +150°; V_S = 5.5 V to 28 V; <Times-italic.normal>V_{CAN} = 4.75 V to 5.25 V; RL = 60Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Loop delay (dominant to recessive)	$t_{LOOP,r}$	–	150	255	ns	[1)]CAN Normal Mode; C_L = 100pF; R_L = 60Ω; V_{CAN} = 5V; C_{RXDCAN} = 15 pF	P_9.3.33
Propagation Delay TXDCAN low to bus dominant	$t_{d(L),T}$	–	90	140	ns	CAN Normal Mode; C_L = 100pF; *50 Ω* < R_L < 65 Ω; V_{CAN} = 5V	P_9.3.34
Propagation Delay TXDCAN high to bus recessive	$t_{d(H),T}$	–	100	140	ns	CAN Normal Mode; C_L = 100pF; *50 Ω* < R_L < 65 Ω; V_{CAN} = 5V	P_9.3.35
Propagation Delay bus dominant to RXDCAN low	$t_{d(L),R}$	–	100	–	ns	CAN Normal Mode; C_L = 100pF; *50 Ω* < R_L < 65Ω; V_{CAN} = 5V; C_{RXDCAN} = 15 pF	P_9.3.36
Propagation Delay bus recessive to RXDCAN high	$t_{d(H),R}$	–	100	–	ns	CAN Normal Mode; C_L = 100pF; *50 Ω* < R_L < 65Ω; V_{CAN} = 5V; C_{RXDCAN} = 15 pF	P_9.3.37
Received Recessive bit width (CAN FD up to 2Mbps)	$t_{bit(RXD)}$	400	–	550	ns	CAN Normal Mode; C_L = 100pF; R_L = 60Ω ; V_{CAN} = 5V; C_{RXD} = 15pF; $t_{bit(TXD)}$ = 500ns; Parameter definition in according to Figure 29.	P_9.3.38
Transmitted Recessive bit width (CAN FD up to 2Mbps)	$t_{bit(BUS)}$	435	–	530	ns	CAN Normal Mode; C_L = 100pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXD} = 15 pF; $t_{bit(TXD)}$ = 500ns; Parameter definition in according to Figure 29.	P_9.3.43

Confidential for ALRT Only

Table 26 Electrical Characteristics (cont'd)

T_j = -40°C to +150°; V_S = 5.5 V to 28 V; <Times-italic.normal>V_{CAN} = 4.75 V to 5.25 V; RL = 60Ω; CAN Normal Mode; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Receiver timing symmetry[6] (CAN FD up to 2Mbps)	Δt_{Rec}	-65	–	40	ns	CAN Normal Mode; C_L = 100pF; R_L = 60Ω; V_{CAN} = 5V; C_{RXD} = 15pF; $t_{bit(TXD)}$ = 500ns; Parameter definition in according to Figure 29.	P_9.3.44
Received Recessive bit width (CAN FD up to 5Mbps)	$t_{bit(RXD)}$	120	–	220	ns	CAN Normal Mode; C_L = 100pF; R_L = 60Ω ; V_{CAN} = 5V; C_{RXD} = 15pF; $t_{bit(TXD)}$ = 200ns; Parameter definition in according to Figure 29.	P_9.3.45
Transmitted Recessive bit width (CAN FD up to 5Mbps)	$t_{bit(BUS)}$	155	–	210	ns	CAN Normal Mode; C_L = 100pF; R_L = 60 Ω; V_{CAN} = 5 V; C_{RXD} = 15 pF; $t_{bit(TXD)}$ = 200ns; Parameter definition in according to Figure 29.	P_9.3.46
Receiver timing symmetry (CAN FD up to 5Mbps)	Δt_{Rec}	-45	–	15	ns	CAN Normal Mode; C_L = 100pF; R_L = 60Ω; V_{CAN} = 5V; C_{RXD} = 15pF; $t_{bit(TXD)}$ = 200ns; Parameter definition in according to Figure 29.	P_9.3.47
TXDCAN Permanent Dominant Time-out	t_{TXDCAN_TO}	1.6	2.0	2.4	ms	[7]CAN Normal Mode	P_9.3.39
BUS Permanent Dominant Time-out	$t_{BUS_CAN_TO}$	2.0	2.5	3.0	ms	[7]CAN Normal Mode	P_9.3.40
Timeout for bus inactivity	$t_{SILENCE}$	0.6	–	1.2	s	[7]	P_9.3.48
Bus Bias reaction time	t_{Bias}	–	–	250	µs	[7]	P_9.3.49

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

1) V_{SYM} shall be observed during dominant and recessive state and also during the transition dominant to recessive and vice versa while TXD is simulated by a square signal (50% duty cycle) with a frequency of up to 1 MHz (2 MBit/s);
2) R_{test} between (Vs /VCAN) and 0V (GND);
3) Not subject to production test, specified by design;
4) Wake-up is signalized via INTN pin activation in SBC Stop Mode and via VCC1 ramping up with wake from SBC Sleep Mode;
5) For WUP: time starts with end of last dominant phase of WUP; for WUF: time starts with end of CRC delimiter of the WUF
6) $\Delta t_{Rec} = t_{bit(RXD)} - t_{bit(BUS)}$.
7) Not subject to production test, tolerance defined by internal oscillator tolerance.

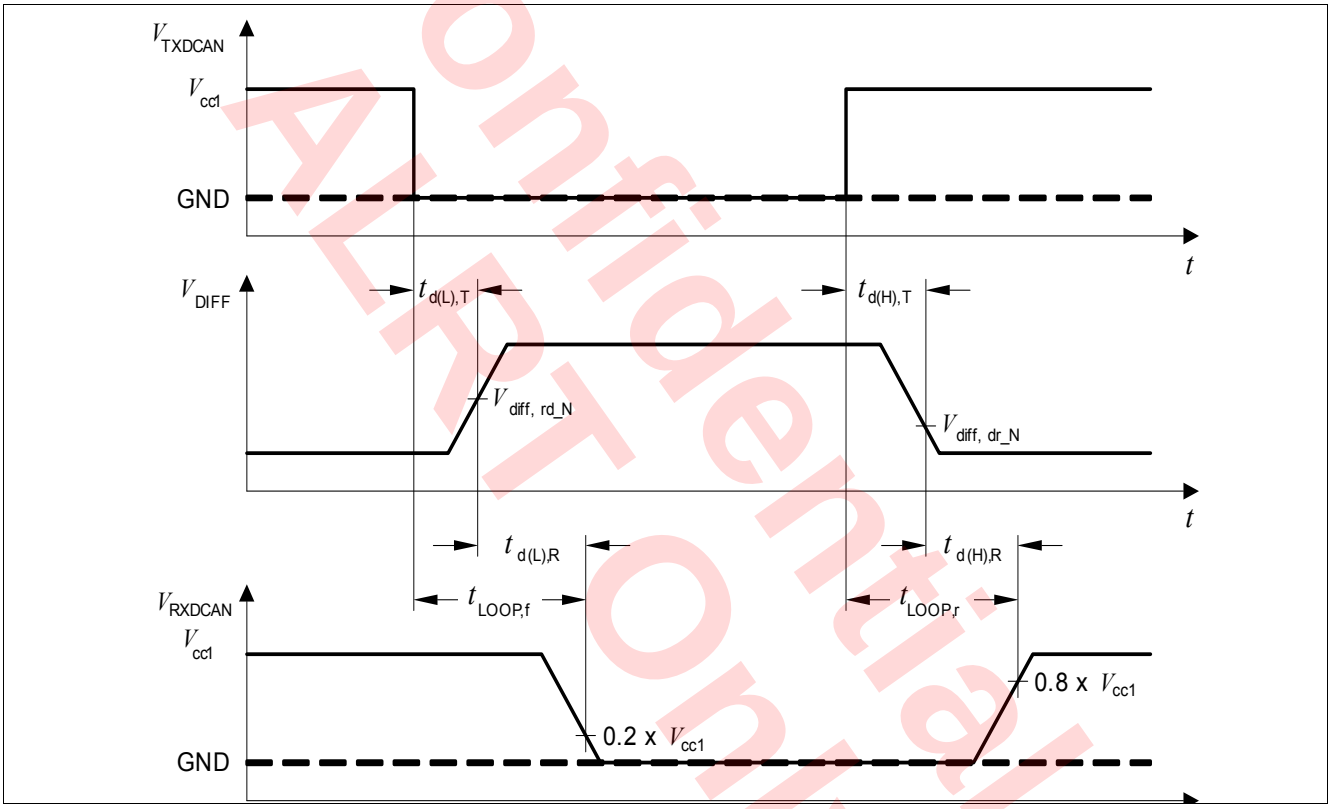

Figure 28 Timing Diagrams for Dynamic Characteristics

Confidential for ALRT Only

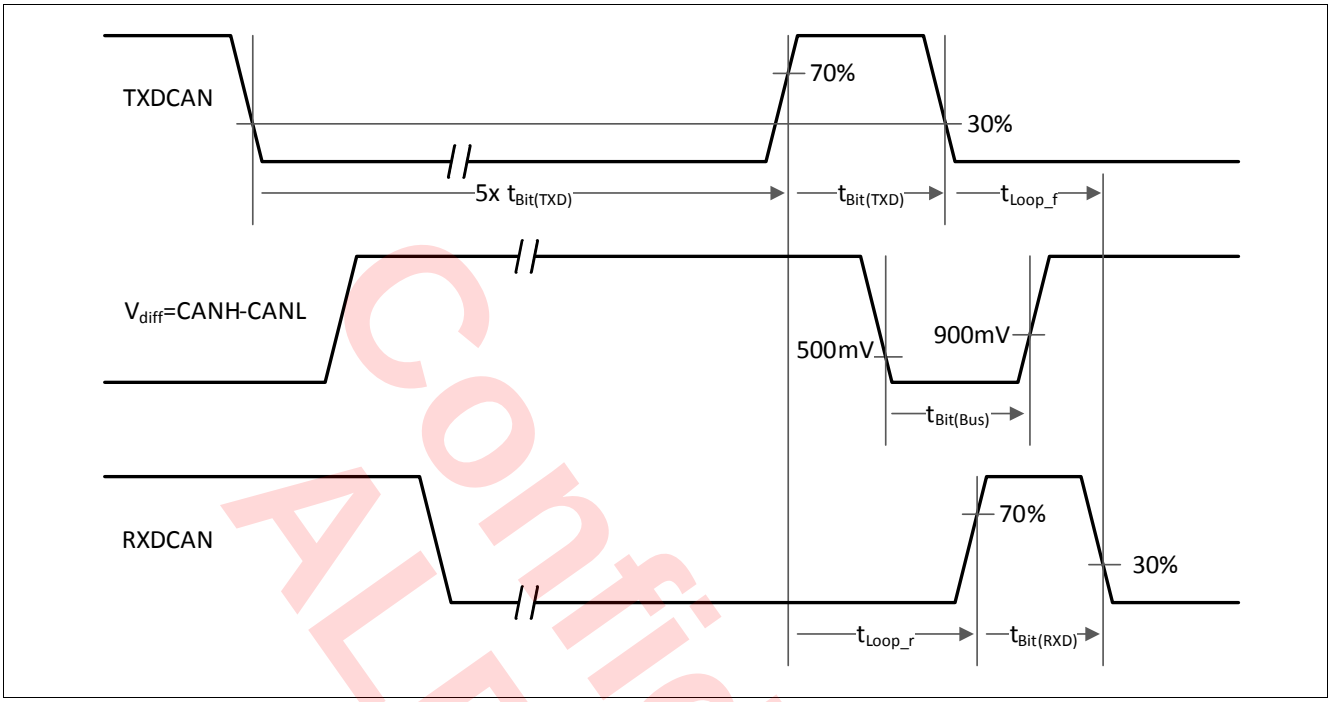

Figure 29 From ISO 11898-2: tloop, tbit(TXD), tbit(Bus), tbit(RXD) definitions

Confidential for ALRT Only

9 High-Voltage Wake and Voltage Monitoring Input

9.1 Block Description

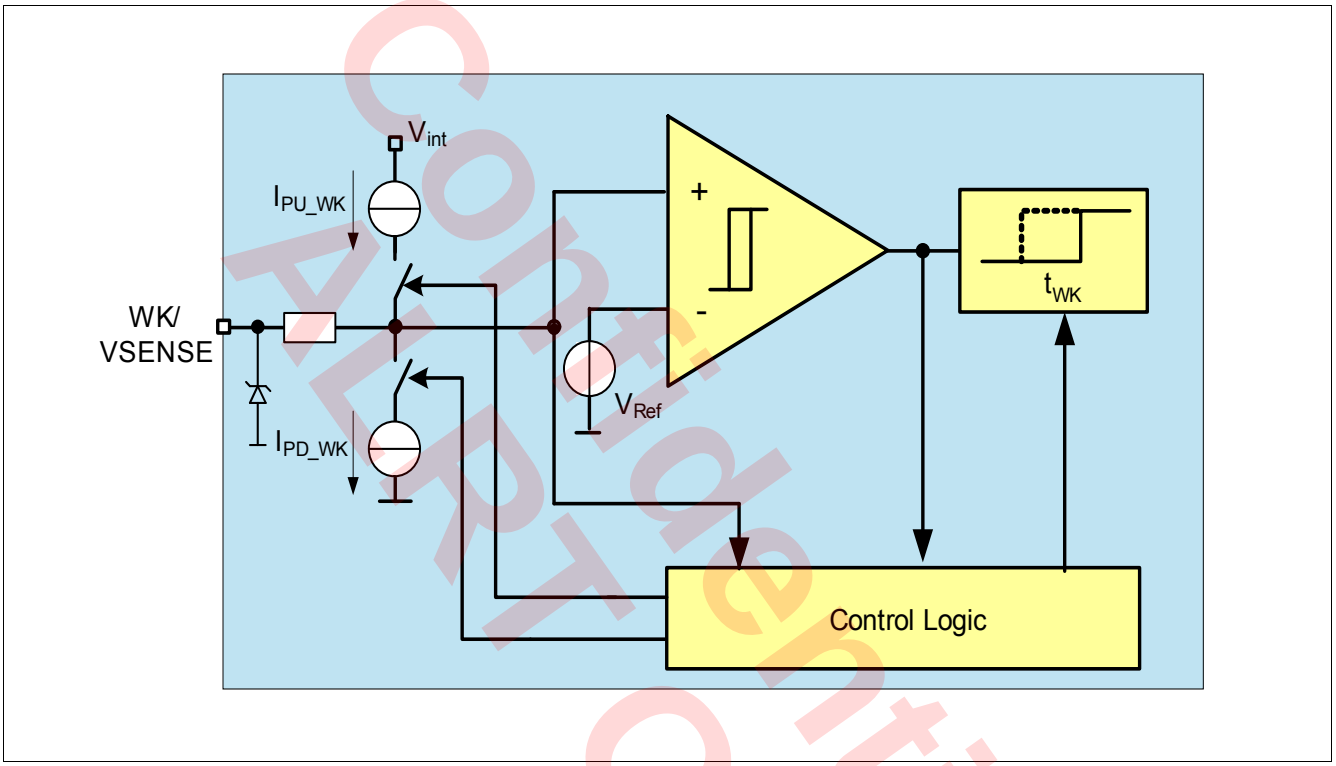

Figure 30 Wake Input Block Diagram

Features

- High-Voltage input with a 3V (typ.) threshold voltage
- Alternate Measurement function for high-voltage sensing via pins WK/SENSE and FO/GPIO
- Wake-up capability for power saving modes
- Edge sensitive wake feature low to high and high to low
- Pull-up and Pull-down current sources, configurable via SPI
- Selectable configuration for static sense or cyclic sense working with TIMER
- In SBC Normal and SBC Stop Mode the level of the WK pin can be read via SPI

Confidential for ALRT Only

9.2 High-Voltage Wake Function

9.2.1 Functional Description

The wake input pin is edge-sensitive inputs with a switching threshold of typically 3V. Both transitions, high to low and low to high, result in a signalization by the SBC. The signalization occurs either in triggering the interrupt in SBC Normal Mode and SBC Stop Mode or by a wake up of the device in SBC Sleep and SBC Fail-Safe Mode.

Two different wake detection modes can be selected via SPI:

- Static sense: WK inputs are always active
- Cyclic sense: WK inputs are only active for a certain time period (see Chapter 5.2.1)

A filter time of 16µs is implemented to avoid an unintentional wake-up due to transients or EMC disturbances in static sense configuration.

The filter time (t_{FWK1}) is triggered by a level change crossing the switching threshold and a wake signal is recognized if the input level will not cross again the threshold during the selected filter time.

Figure 31 shows a typical wake-up timing and filtering of transient pulses.

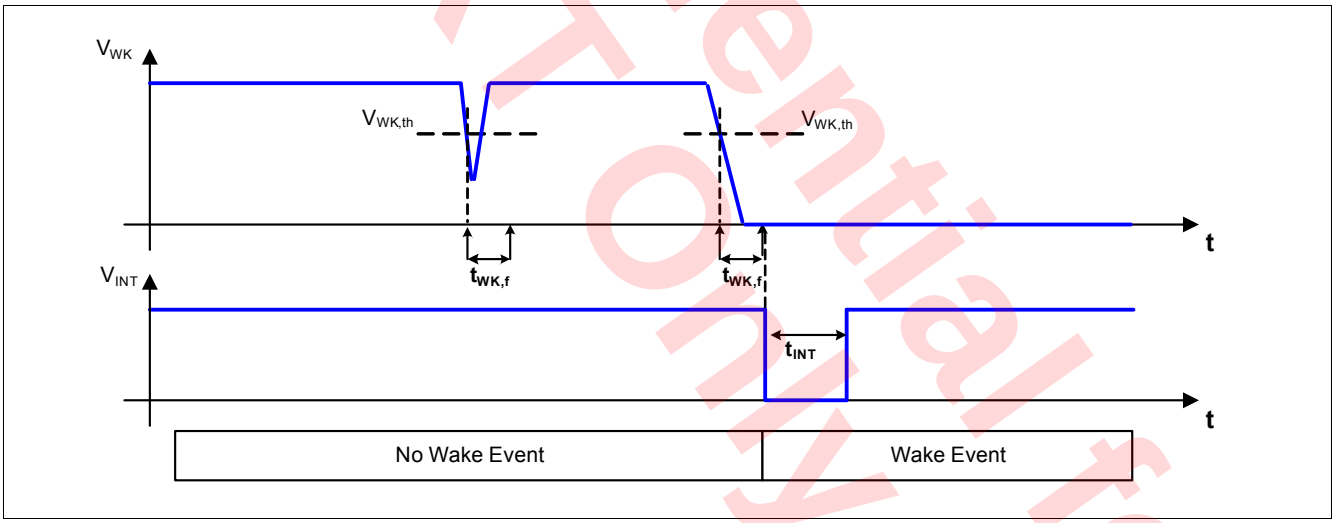

Figure 31 Wake-up Filter Timing for Static Sense

The wake-up capability for the WK pin can be enabled or disabled via SPI command in the WK_CTRL_1 register.

A wake event via the WK pin can always be read in the register WK_STAT_0 at the bit WK_WU.

The actual voltage level of the WK pin (low or high) can always be read in SBC Normal and SBC Stop-, and Init Mode in the register WK_LVL_STAT. During Cyclic Sense, the register show the sampled levels of the respective WK pin.

If FO/GPIO is configured as WK input in its alternative function (16µs static filter time), then the wake events will be signalled in the register WK_STAT_1.

Confidential for ALRT Only

9.2.2 Wake Input Configuration

To ensure a defined and stable voltage levels at the internal comparator input it is possible to configure integrated current sources via the SPI register WK_PUPD_CTRL. An example illustration for the automatic switching configuration is shown in Figure 32.

Table 27 Pull-Up / Pull-Down Resistor

WKx_PUPD_1	WKx_PUPD_0	Current Sources	Note
0	0	no current source	WK input is floating if left open (default setting)
0	1	pull-down	WK input internally pulled to GND
1	0	pull-up	WK input internally pulled to internal 5V supply
1	1	Automatic switching	If a high level is detected at the WK input the pull-up source is activated, if low level is detected the pull down is activated.

Note: If there is no pull-up or pull-down configured on the WK input, then the respective input should be tied to GND or VS on board to avoid unintended floating of the pin and subsequent wake events.

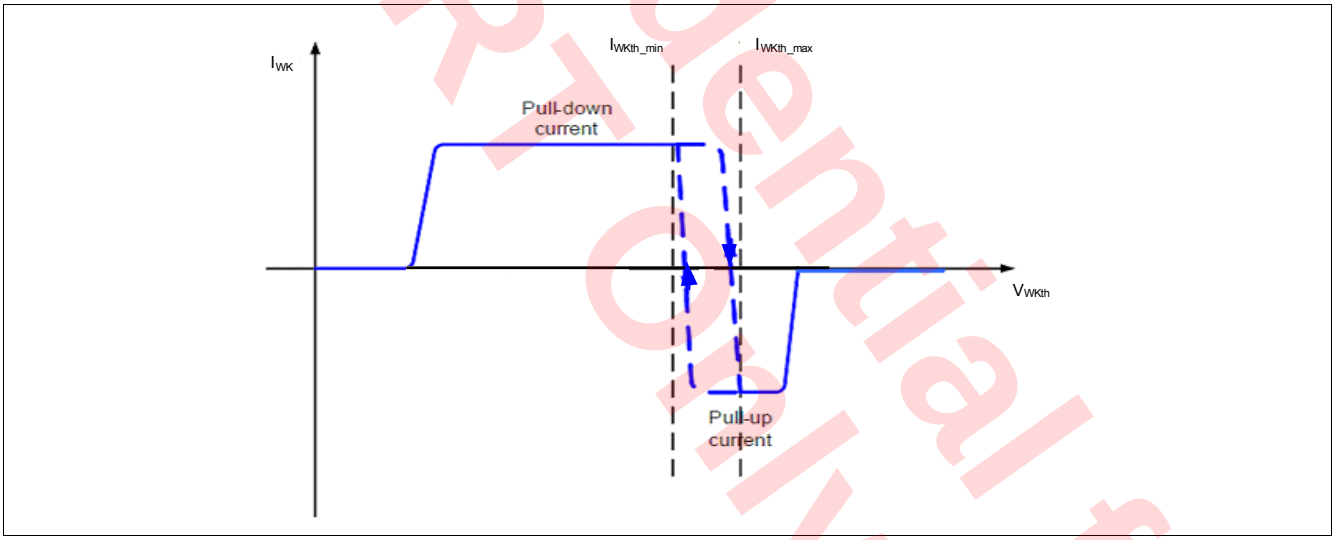

Figure 32 Illustration for Pull-Up / Down Current Sources with Automatic Switching Configuration

Confidential for ALRT Only

9.2.3 Wake configuration for Cyclic Sense

The wake can also be used for cyclical sensing of monitoring signals during low-power modes. For this function the WK input performs a cyclic sensing of the voltage level during the on-time of the GPIO HS.
A transition of the voltage level will trigger a wake-up event.
In order to enable this functionality the GPIO must be configured as HS to be controlled by the Timer.
See also Chapter 5.2.1 and Chapter 11.1.2 for more details.

9.2.4 High-Voltage Sensing as Alternate Function

This function provides the possibility to measure a voltage, e.g. the unbuffered battery voltage, with the protected WK HV-input pin. The measured voltage is routed out at FO/GPIO.

If this function is enabled with the WK_MEAS then neither the FO (including the FO test via FO_ON), nor the GPIO functionality nor the WK functionality will be available.

If the measurement function is enabled then following items should be noted:

- The internal pull-up / pull-down structures are disabled and the internal WK signal is gated (blocked)
- The settings for WK in the registers WK_PUPD_CTRL and WK_CTRL_1 are ignored (but changing the settings is not prevented)
- The wake capability and voltage monitoring of the WK pin is disabled, i.e. WK_STAT_0 and WK_LVL_STAT are not updated, i.e. the bits in WK_LVL_STAT are cleared
- If WK is the only valid wake source then the SPI_FAIL flag will be set when trying to enter SBC Sleep Mode (see also Chapter 5.1) and SBC Restart Mode is entered

Please refer to Chapter 5.4 for more details on the functionality of the measurement unit.

Confidential for ALRT Only

9.3 Electrical Characteristics

Table 28 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
WK Input Pin Characteristics							
Wake-up/monitoring threshold voltage	V_{WKth}	2	3	4	V	without external serial resistor R_S (with R_S: DeltaV = $I_{PD/PU}$ * R_S); hysteresis included	P_10.3.1
Threshold hysteresis	$V_{WKNth,hys}$	0.1	-	0.7	V	without external serial resistor R_S (with R_S: DeltaV = $I_{PD/PU}$ * R_S)	P_10.3.2
WK pin Pull-up Current	I_{PU_WK}	-20	-10	-3	µA	V_{WK_IN} = 4V	P_10.3.3
WK pin Pull-down Current	I_{PD_WK}	3	10	20	µA	V_{WK_IN} = 2V	P_10.3.4
Input leakage current	$I_{LK,I}$	-2		2	µA	0 V < V_{WK_IN} < 40V	P_10.3.5
Timing							
Wake-up filter time 1	t_{FWK1}	13	16	20	µs	1)	P_10.3.6

1) Not subject to production test, tolerance defined by internal oscillator tolerance

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

10 Interrupt Function

10.1 Block and Functional Description

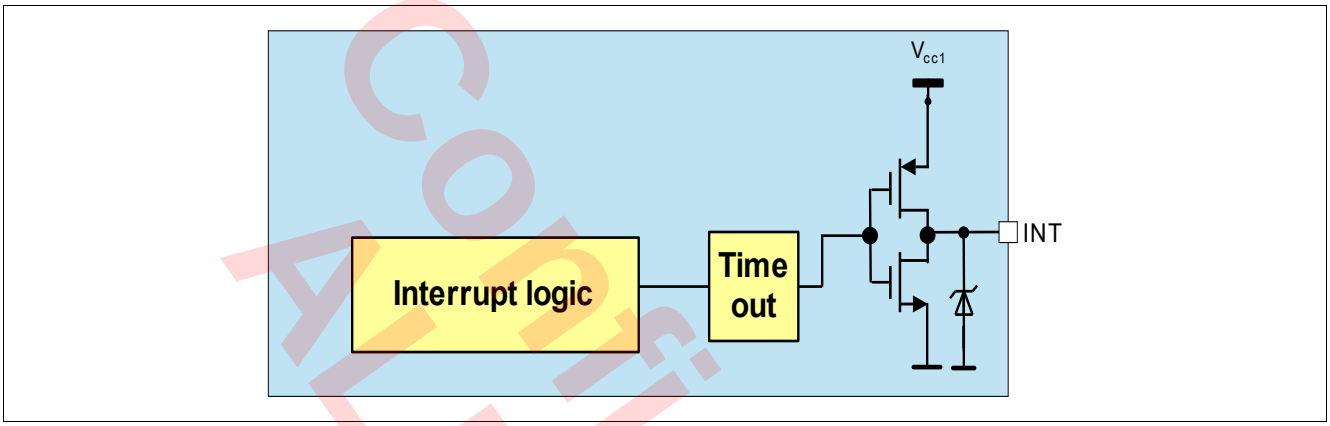

Figure 33 Interrupt Block Diagram

The interrupt is used to signalize special events in real time to the microcontroller. The interrupt block is designed as a push/pull output stage as shown in Figure 33. An interrupt is triggered and the INTN pin is pulled low (active low) for t_{INTN} in SBC Normal and Stop Mode and it is released again once t_{INTN} is expired. The minimum high-time of INTN between two consecutive interrupts is t_{INTND}. An interrupt does not cause a SBC mode change.

Two different interrupt classes could be selected via the SPI bit INT_ GLOBAL:

- Class 1 (wake interrupt - INT_ GLOBAL=0): all wake-up events stored in the wake status SPI registers (WK_STAT_0 and WK_STAT_1 if GPIO is configured as WK) cause an interrupt. The wake sources are listed below.
  An interrupt is only triggered if the respective function is also enabled as a wake source (including GPIOx if configured as a wake input). The CAN time out signalization CANTO is also considered as a wake source. Therefore, the interrupt mask bit CANTO_ MASK has higher priority than the bit INT_ GLOBAL, i.e. the bit is not taken into account for CANTO.
  - via CAN (wake-up or CAN Bus time out)
  - via the WK pin
  - via TIMER
  - via GPIO (if configured as WK input)
- Class 2 (global interrupt - INT_ GLOBAL=1): in addition to the wake-up events, all signalled failures stored in the other status registers trigger an interrupt (the registers WK_LVL_STAT and FAM_PROD_STAT are not generating interrupts, neither will the selective wake registers SWK_STAT, SWK_OSC_CAL_H_STAT, SWK_OSC_CAL_L_STAT, SWK_ECNT_STAT, SWK_CDR_CTRL1, SWK_CDR_CTRL2)

Note: The errors which will cause SBC Restart or SBC Fail-Safe Mode (VCC1_UV, WD_FAIL, VCC1_SC, TSD2_SAFE, TSD2, FAILURE) are the exceptions of an INTN generation on status bits. Also the bits POR and DEV_STAT_[1:0] will not generate interrupts.

Note: During SBC Restart Mode the SPI is blocked and the microcontroller is in reset. Therefore the INTN will not be in SBC Restart Mode, which is the same behavior in SBC-Fail-Safe or Sleep Mode.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

In addition to this behavior, INTN will be triggered when SBC Stop Mode is entered and not all wake source bits were cleared in the WK_STAT_0and WK_STAT_1 register.

The SPI status registers are updated at every falling edge of the INTN pulse. All interrupt events are stored in the respective register (except the register WK_LVL_STAT) until the register is read and cleared via SPI command. A second SPI read after reading out the respective status register is optional but recommended to verify that the interrupt event is not present anymore. The interrupt behavior is shown in Figure 34 for class 1 interrupts. The behavior for class 2 is identical.

The INTN pin is also used during SBC Init Mode to select the hardware configuration of the device. See Chapter 5.1.1 for further information.

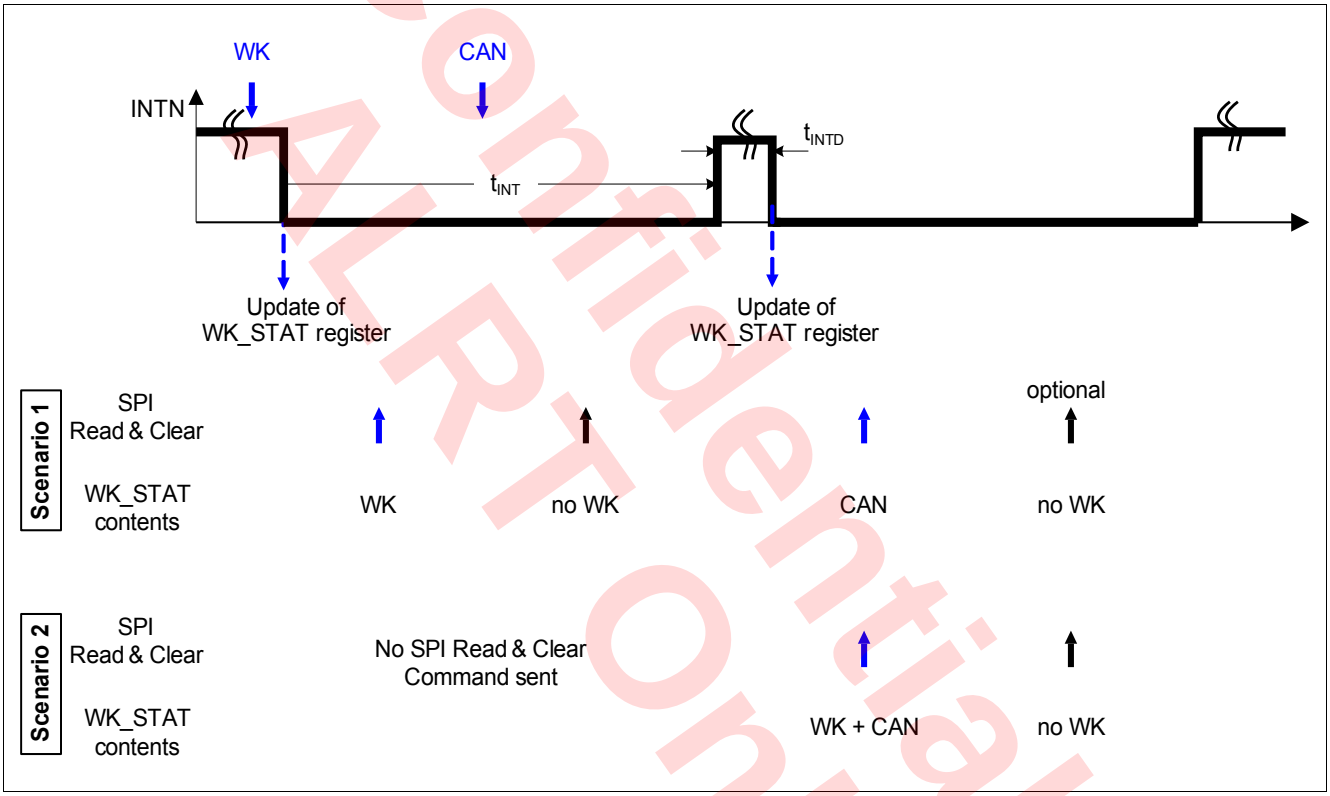

Figure 34 Interrupt Signalization Behavior

Confidential for ALRT Only

10.2 Electrical Characteristics

Table 29 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Interrupt Output; Pin INTN							
INTN High Output Voltage	$V_{INTN,H}$	0.8 × V_{CC1}	–	–	V	1) I_{INTN} = -1 mA; INTN = off	P_11.2.1
INTN Low Output Voltage	$V_{INTN,L}$	–	–	0.2 × V_{CC1}	V	1) I_{INTN} = 1 mA; INTN = on	P_11.2.2
INTN Pulse Width	t_{INTN}	80	100	120	µs	2)	P_11.2.3
INTN Pulse Minimum Delay Time	t_{INTND}	80	100	120	µs	2) between consecutive pulses	P_11.2.4
Configuration Select; Pin INTN							
Config Pull-down Resistance	R_{CFG}	150	250	320	kΩ	V_{INTN} = 5 V	P_11.2.5
Config Select Filter Time	t_{CFG_F}	5	10	14	µs	2)	P_11.2.6

1) Output Voltage Value also determines device configuration during SBC Init Mode
2) Not subject to production test, tolerance defined by internal oscillator tolerance.

Confidential for ALRT Only

Confidential for ALRT Only

11 Fail Output and General Purpose I/O (GPIO)

11.1 Block and Functional Description

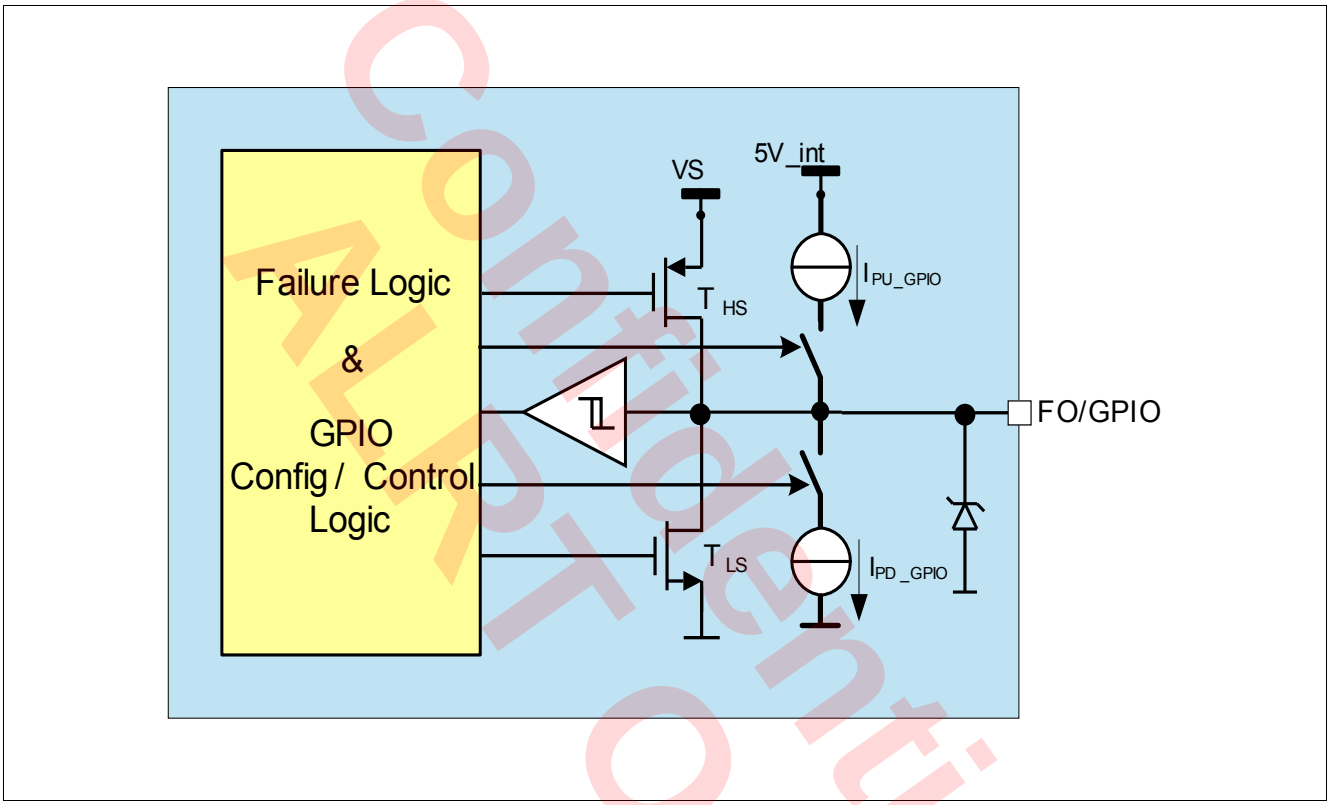

Figure 35 Simplified Fail Output and GPIO Block Diagram

Features

- Fail-Output Function to signalize fail-safe events (FO function)
- General Purpose I/O functionality in case the fail-output function is not needed (GPIO function)
- Output of HV Measurement function in case WK is selected accordingly (WK_MEAS)

Confidential for ALRT Only

11.1.1 Fail-Output Function

The fail output consists of a failure logic and an open-drain output (FO) with active-low signalization. It is the default configuration after device power-up to support fail-safe functions.

The fail output is activated due to following failure conditions:

- Watchdog trigger failure (For config 3&4 only after the 2nd watchdog trigger failure and for config 1&2 after 1st watchdog trigger failure)
- Thermal shutdown TSD2
- VCC1 short to GND
- VCC1 over voltage (only if the SPI bit VCC1_OV_RST is set)

At the same time when FO is triggered, the SBC Fail-Safe Mode is entered (exceptions are watchdog trigger failures depending on selected configurations - see Chapter 5.1.1). The fail output activation is signalled in the SPI bit FAILURE of the register DEV_STAT.

The entry of SBC Fail-Safe Mode due to a watchdog failure can be configured as described in Chapter 5.1.1.
If the FO was activated due to a failure then it will stay activated (pulled low) in all SBC Modes.

In order to deactivate the fail output in SBC Normal Mode the failure conditions must not be present anymore (e.g. TSD2, VCC1 short circuit, VCC1 over voltage - independent of the VCC1_OV_RST, etc) and the bit FAILURE needs to be cleared via SPI command. In case of a FAILURE bit setting due to a watchdog fail, a successful WD trigger is needed in addition, i.e. WD_FAIL must be cleared. WD_FAIL will also be cleared when going to SBC Sleep or SBC Fail-Safe Mode due to another failure (not a WD failure) or if the watchdog is disabled in SBC Stop Mode.

For testing purposes only the Fail Output can also be activated via SPI by setting the bit FO_ON. This bit is independent of the FO failure bits. In case that there is no failure condition, the FO outputs can also be turned off again via SPI, i.e. no successful watchdog trigger is needed.
In case FO was activated via the SPI bit FO_ON then it will be disabled when entering SBC Restart Mode and will stay off in SBC Normal Mode.

Note: The Fail output pin is triggered for any of the above described failures.

Note: The bit FO_ON can be written in any GPIO configuration. However, the fail-output pin FO/GPIO will only be activated if GPIO is configured as FO, i.e. the bit will be ignored for any other GPIO configuration.

Confidential for ALRT Only

11.1.2 General Purpose I/O Function as Alternate Function

In case that FO functionality is not used in the application, then the pin can be configured with an alternate function as high-voltage (VS related) General Purpose I/O pin via the SPI bits GPIO.

To avoid unintentional changes of the respective GPIO function during operation the configuration can be locked via the SPI bit CFG_LOCK_0

FO can be reconfigured in SBC Normal Mode for following functions:

- FO functionality (default state) when configured as GPIO =’000’...’010’:
  - Overcurrent shutdown and open load detection is disabled
- Off (also disabled in case FO1 is activated) when configured as GPIO =’100’
- Wake Input when configured as GPIO=’101’:
  - There is a blanking time $t_{GPIO,WK,blank}$ when FO/GPIO is configured as wake input. Only then the level detection becomes valid, i.e. the filter time t_{FWK1} is started.
  - The pin can be used as a wake source. A level change is detected at the threshold $V_{GPIOI,th}$.
    The wake capability can be enabled and disabled by setting the GPIO bits. Once configured as wake input it is automatically wake capable.
  - Wake events are stored and reported in WK_STAT_1; the bit GPIO_WK_WU is cleared when SBC Fail-Safe Mode is entered.
  - Internal pull-up or pull-down structures are implemented and can be configured with the SPI bits GPIO_WK_PUPD.
  - SBC Normal, Stop-, Init and Restart Mode: The input level is shown in the WK_LVL_STAT register
  - SBC Normal and Stop Mode: INTN is triggered in case of a qualified edge change.
  - SBC Restart Mode: The SPI is blocked and cannot be read;
    INTN will not be triggered but GPIO_WK_WU will be set.
  - SBC Sleep Mode: The device is woken up in case of a qualified edge change, i.e. VCC1 is enabled.
    WK_LVL_STAT is updated during SBC Sleep and Fail-Safe Mode but it can only be read when entering again SBC Normal Mode.
- Low-Side incl. PWM control when configured as GPIO =’110’:
  - The switch is controlled by the PWM generator: 0% DC = off and 100% DC = on;
    any other duty cycle can be configured in PWM_CTRL.

    The PWM frequency can be selected in PWM_FREQ_CTRL
  - the respective level at the pin will be shown in WK_LVL_STAT in SBC Normal, Stop-, Init and Restart Mode and can serve as a feedback about the respective switch state[1)]
  - On-state overcurrent shutdown is implemented.
    During PWM operation the diagnosis is active only during the LS on-time.
    The bit GPIO_OC shows an over current shutdown respectively and the switch is disabled.
    Depending on the duty cycle the diagnosis might not be activated considering the respective filter timing.
- High-Side incl. PWM control when configured as GPIO =’111’:

1) The level is determined by the wake comparator and will be shown as low or high, i.e. the feature might not be useful if a duty cycle of 0% < DC < 100% is applied

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

  - The switch is controlled by the PWM generator: 0% DC = off and 100% DC = on; any other duty cycle can be configured in PWM_CTRL.

    The PWM frequency can be selected in PWM_FREQ_CTRL
  - the respective level at the pin will be shown in WK_LVL_STAT in SBC Normal, Stop-, Init and Restart Mode and can serve as a feedback about the respective switch state[1)]
  - On-state open load is detection and overcurrent shutdown is implemented.
    During PWM operation the diagnosis is active only during the HS on-time.
    In case of open load detection the bit GPIO_OL is set.
    In case of over current detection the bit GPIO_OC is set and the switch is shut down.
    Depending on the duty cycle the diagnosis might not be activated considering the respective filter timing
- High-Side with cyclic sense functionality when configured as GPIO = '011':
  - The HS is used in combination with the WK pin and is controlled by the Timer. Cyclic sense will not work if the GPIO is not configured accordingly.
  - The configuration for cyclic sense, e.g. the period and on-time of the cyclic sense function is done via the registers TIMER_CTRL, WK_CTRL_1, WK_PUPD_CTRL
  - A learning cycle is started every time when the timer is started via the on-time and GPIO is configured as HS with cyclic sense = '011'
  - Overcurrent shutdown is active only during the HS on-time:
    In case of over current detection the bit GPIO_OC is set and the switch is shut down.
    The timer will keep running, i.e. cyclic wake would be still available.
    The open load detection is not available in this configuration.
  - WK_LVL_STAT will not be updated
  - See Chapter 5.2.1 and Chapter 9.2 for more information about cyclic sense

Note: *It must be ensured that the correct GPIO configuration is selected after device power-up to ensure proper functionality.*
It is recommended to use the CFG_LOCK_0 bit to avoid unintentional configuration changes.
It is not recommended to change the GPIO configuration during the operation to avoid misleading SPI status bit settings (e.g. wake event, over current, open load) or unexpected timings due to shared PWM generator.

Note: *Before GPIO shall be configured as HS or LS with PWM Control the PWM_CTRL register must be set first.*

Note: *The internally stored default value used for the wake-input configuration is 'low'. A level change will be signalized via the bit GPIO_WK_WU in case the externally connected signal on FO/GPIO is 'high'. If there is a level change on FO/GPIO while configuring the wake function then a wake event could occur as there is no internal learning cycle and the last filtered value will be used as a reference.*

Shutdown behavior in case of low-side or high-side configuration (incl. cyclic sense & PWM):

- The switch is disabled in case of over current detection with either low- or high-side configuration, SBC Restart or Fail-Safe Mode entry
- The SPI bits are set to GPIO = OFF = '100'
- The switch will stay OFF until it is enabled again via the GPIO bits,
- In case CFG_LOCK_0 is set, then the bit must first be cleared before the configuration can be enabled again. Then the lock bit should be set again

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only
Confidential for ALRT Only

- The switch can be enabled even if either GPIO_OL or GPIO_OC bit is set.
- A VS_UV condition is not affecting the behavior of the GPIO.

Note: After a short-circuit event for either low-side or high-side configuration a minimum recovery time of 25us must be ensured before enabling the respective function again!

Note: If FO is not enabled then also then FO/GPIO will not be activated in case of failures. Neither will the FAILURE bit be set but it can be cleared. In addition, it is not possible to activate FO/GPIO via FO_ON in this case.

Restart and Soft-Reset Behavior:

The behavior during SBC Restart and Fail-Safe Mode as well as the transition to SBC Normal Mode is as follows:

- if configured as Wake Input: it will stay wake capable during SBC Restart Mode and will be an automatic wake source in SBC Fail-Safe Mode. WK_LVL_STAT is updated but it can only be read when entering again SBC Normal Mode.
- if configured as Low-Side or High-Side: They will be disabled during SBC Restart and Fail-Safe Mode. They will stay off when returning to SBC Normal Mode and can be enabled again via SPI (Restart value is 'OFF').
- if configured as FO and activated due to a failure: FO will stay activated during SBC Restart Mode and when entering SBC Normal Mode (SPI register is not modified).
- In case of a SBC Soft Reset command the GPIO configuration will be unchanged if CFG_LOCK_0 is set but the settings for Timer and PWM register are reset.

The detailed behavior for the respective configurations and SBC modes is listed in below table:

Table 30 Fail-Output and GPIO configuration behavior during the respective SBC Modes

FO Configuration	SBC Normal Mode	SBC Stop Mode	SBC Sleep Mode	SBC Restart Mode	SBC Fail-Safe Mode
FO (default)	configurable	fixed	fixed	active / fixed	active
Off		Off	Off	Off	Off
Wake Input		wake capable	wake capable	wake capable	wake capable
Low-Side		fixed	fixed	Off	Off
High-Side		fixed	fixed	Off	Off

Note: Above mentioned behavior also applies to the PWM operation for LS and HS and for HS cyclic sense function.

Explanation of GPIO states:

- configurable: settings can be changed in this SBC mode
- fixed: settings stay as configured in SBC Normal Mode
- active: FO is activated due to a failure leading to SBC Restart or Fail-Safe Mode.

11.1.3 WK and FO/GPIO HV-Sensing Function as Alternative Function

This function provides the possibility to measure a voltage, e.g. the unbuffered battery voltage, with the protected WK HV-input. The measured voltage is routed out at FO/GPIO.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only
Confidential for ALRT Only

If this function is enabled with the WK_MEAS then neither the FO (including the FO test via FO_ON) nor the GPIO functionality will be available. Trying to enable the FO/GPIO functionality will set the SPI_FAIL flag.

If the measurement function is enabled then following items should be noted:

- The internal pull-up / pull-down structures are disabled and the internal WK signal is gated (blocked)
- The register WK_PUPD_CTRL can be modified but functionality changes are ignored. The GPIO_CTRL cannot be modified while WK_MEAS = '1'. WK_MEAS cannot be set if FO is configured. In this case SPI_FAIL will be set.
  FO must be first set to OFF
- The wake capability and voltage monitoring of the WK pin is disabled, i.e. WK_STAT_1 and WK_LVL_STAT are not updated
- If GPIO WK is the only valid wake source then the SPI_FAIL flag will be set when trying to enter SBC Sleep Mode (see also Chapter 5.1) and SBC Restart Mode is entered

Please refer to Chapter 5.4 for more details on the functionality of the measurement unit.

Confidential for ALRT Only

11.2 Electrical Characteristics

Table 31 Electrical Characteristics

<Times-italic.normal>V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
FO and Alternative Function GPIO							
FO low-side output voltage (active)	$V_{FO,L1}$	–	–	1	V	If configured as Fail-Output; I_{FO} = 4.0mA	P_12.2.1
GPIO low-side output voltage (active)	$V_{GPIOL,L1}$	–	–	1	V	If configured as Low-Side Switch I_{GPIO} = 30mA	P_12.2.3
GPIO low-side output voltage (active)	$V_{GPIOL,L2}$	–	–	5	mV	1) *If configured as Low-Side Switch;* I_{GPIO} = 100µA	P_12.2.4
GPIO high-side output voltage (active)	$V_{GPIOH,H1}$	VS-1	–	–	V	If configured as High-Side Switch; I_{GPO} = -30mA	P_12.2.5
GPIO high-side output voltage (active)	$V_{GPIOH,H2}$	VS-5	–	–	mV	1) If configured as High-Side Switch; I_{GPO} = -100µA	P_12.2.6
GPIO input threshold voltage (WK config)	$V_{GPIOI,th}$	1.5	2.5	3.5	V	hysteresis included; pull-up / pull-down sources disabled	P_12.2.7
GPIO input threshold hysteresis (WK config)	$V_{GPIOI,hys}$	0.6	0.9	1.3	V	1) pull-up / pull-down sources disabled	P_12.2.8
GPIO input filter time (WK config)	$t_{F_GPIO_WK}$	13	16	20	µs	2)	P_12.2.19
FO/GPIO input leakage current (all inactive)	$I_{GPIO,LK}$	-2	–	2	µA	0V < V_{GPIO} < VS	P_12.2.9
GPIO wake input activation blanking time	$t_{GPIO,WK,blank}$	24	30	40	µs	2) after enabling as wake input	P_12.2.10
GPIO LS overcurrent Shutdown Threshold	$I_{GPIOL,SD}$	30	–	65	mA	V_{GPIO} = VS, hysteresis included	P_12.2.11
GPIO HS overcurrent Shutdown Threshold	$I_{GPIOH,SD}$	-65	–	-30	mA	V_{GPIO} = 0V, hysteresis included	P_12.2.12
GPIO overcurrent shutdown filter time	$t_{GPIO,OC}$	20	26	32	µs	2) applies for HS and LS configuration	P_12.2.13
GPIO HS open load detection	$I_{GPIOH,OL}$	-3.0	–	-0.5	mA	in on-state, hysteresis included	P_12.2.15

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 31 Electrical Characteristics (cont'd)

<Times-italic.normal>V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
GPIO open load detection filter time	$t_{GPIO,OL}$	51	64	80	µs	2)	P_12.2.16
GPIO WK pin Pull-up Current	$I_{PU_GPIO,WK}$	-20	-10	-3	µA	V_{GPIO,WK_IN} = 3.5V	P_12.3.17
GPIO WK pin Pull-down Current	$I_{PD_GPIO,WK}$	3	10	20	µA	V_{GPIO,WK_IN} = 1.5V	P_12.3.18

1) Not subject to production test, specified by design.
2) Not subject to production test, tolerance defined by internal oscillator tolerance

Confidential for ALRT Only

12 Supervision Functions

12.1 Reset Function

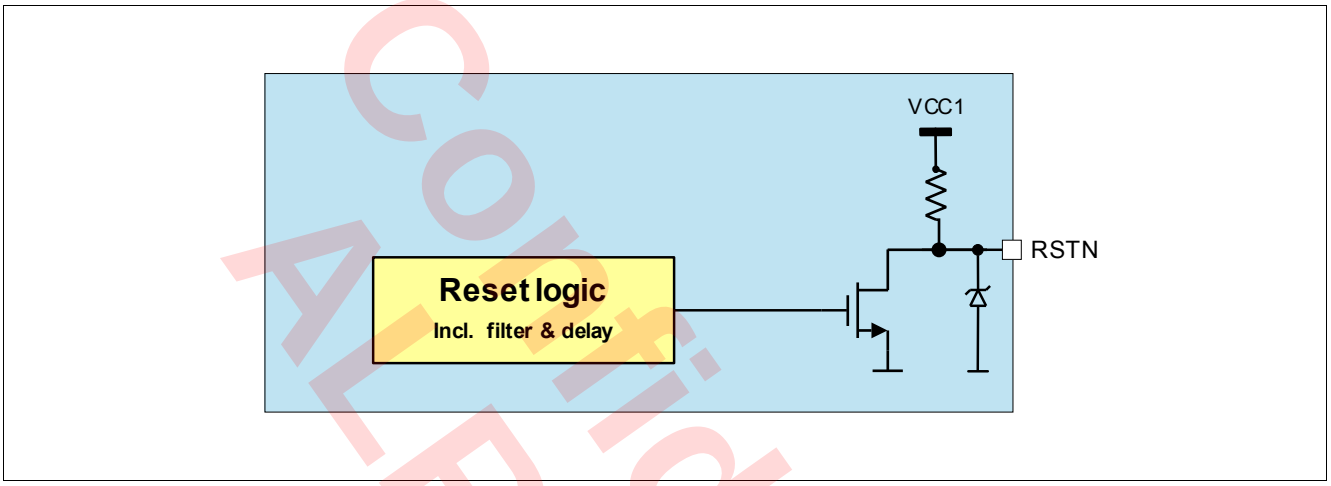

Figure 36 Reset Block Diagram

12.1.1 Reset Output Description

The reset output pin RSTN provides a reset information to the microcontroller, for example, in the event that the output voltage has fallen below the undervoltage threshold $V_{RT1/2/3/4}$. In case of a reset event, the reset output RSTN is pulled to low after the filter time t_{RF} and stays low as long as the reset event is present and the configurable reset delay time has not expired.The reset delay time can be configured depending on the application. The default value is the extended reset delay time t_{RD1} and the reduced reset delay time t_{RD2} can be selected by setting RSTN_DEL. When connecting the SBC to battery voltage, the reset signal remains low initially. When the output voltage V_{cc1} has reached the reset default threshold $V_{RT1,r}$, the reset output RSTN is released to high after the reset delay time t_{RD1}. A reset can also occur due to a watchdog trigger failure. The reset threshold can be adjusted via SPI, the default reset threshold is $V_{RT1,f}$. The RSTN pin has an integrated pull-up resistor. In case reset is triggered, it will be pulled low for V_{cc1} ≥ 1V and for VS ≥ $V_{POR,f}$ (see also Chapter 12.3).

The timings for the RSTN triggering regarding VCC1 undervoltage and watchdog trigger is shown in Figure 37.

Confidential for ALRT Only

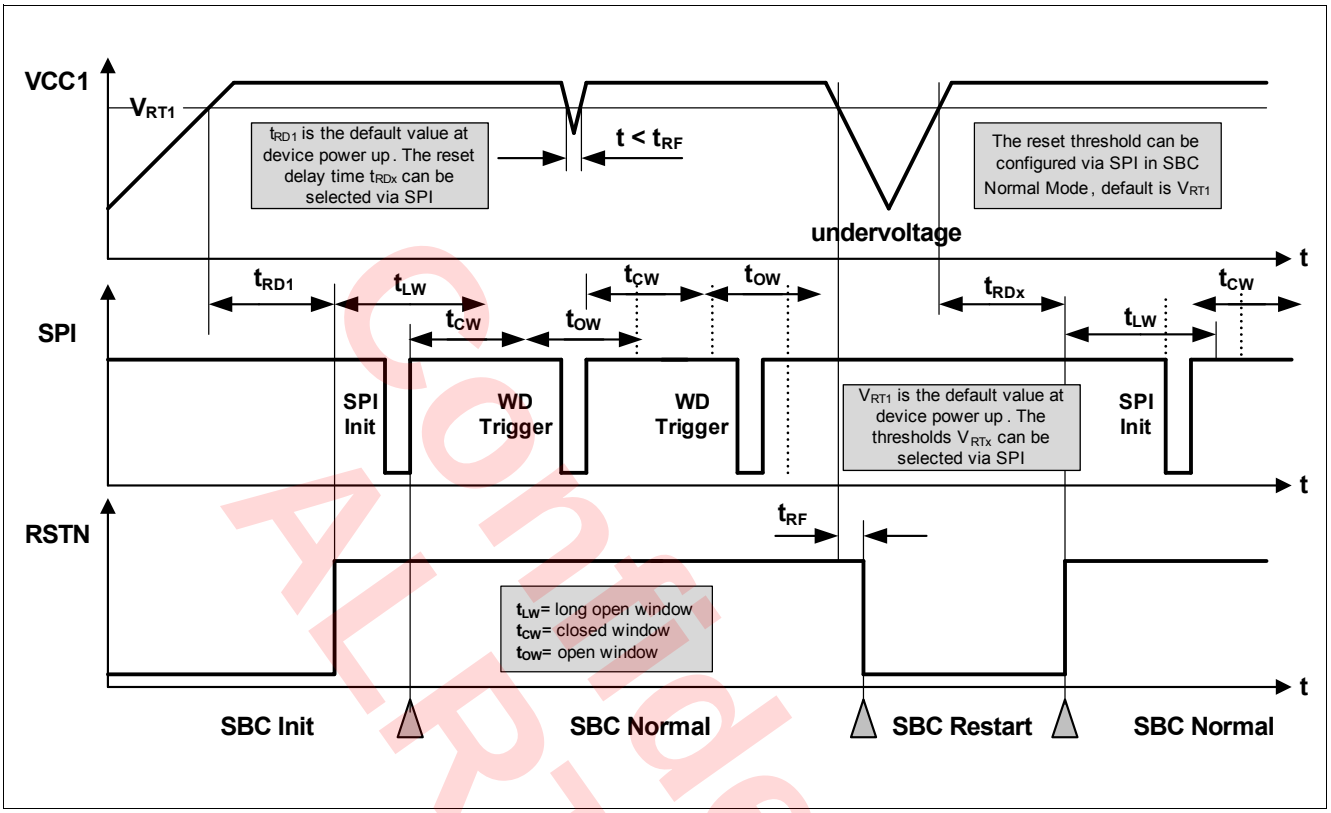

Figure 37 Reset Timing Diagram

12.1.2 Soft Reset Description

In SBC Normal and SBC Stop Mode, it is also possible to trigger a device internal reset via a SPI command in order to bring the SBC into a defined state in case of failures. In this case the microcontroller must send a SPI command and set the MODE bits to '11' in the M_S_CTRL register. As soon as this command becomes valid, the SBC is set back to SBC INIT Mode and all SPI registers are set to their default values (see SPI Chapter 13.5 and Chapter 13.6).

Two different soft reset configurations are possible via the SPI bit SOFT_RESET_RST:

- SOFT_RESET_RST = '0': The reset output (RSTN) is triggered when the soft reset is executed (default setting, the same reset delay time t_{RD1} applies)
- SOFT_RESET_RST = '1': The reset output (RSTN) is not triggered when the soft reset is executed

Note: The device must be in SBC Normal Mode or SBC Stop Mode when sending this command. Otherwise, the command will be ignored.

12.2 Watchdog Function

The watchdog is used to monitor the software execution of the microcontroller and to trigger a reset if the microcontroller stops serving the watchdog due to a lock up in the software.

Two different types of watchdog functions are implemented and can be selected via the bit WD_WIN:

- Time-Out Watchdog (default value)
- Window Watchdog

The respective watchdog functions can be selected and programmed in SBC Normal Mode. The configuration stays unchanged in SBC Stop Mode.

Please refer to Table 32 to match the SBC Modes with the respective watchdog modes.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 32 Watchdog Functionality by SBC Modes

SBC Mode	Watchdog Mode	Remarks
INIT Mode	Starts with Long Open Window	Watchdog starts with Long Open Window after RSTN is released
Normal Mode	WD Programmable	Window Watchdog, Time-Out watchdog or switched off for SBC Stop Mode
Stop Mode	Watchdog is fixed or off	
Sleep Mode	Off	SBC will start with Long Open Window when entering SBC Normal Mode.
Restart Mode	Off	SBC will start with Long Open Window when entering SBC Normal Mode.

The watchdog timing is programmed via SPI command in the register **WD_CTRL**. As soon as the watchdog is programmed, the timer starts with the new setting and the watchdog must be served. The watchdog is triggered by sending a valid SPI-write command to the watchdog configuration register. The watchdog trigger command is executed when the SPI command is interpreted, i.e. 3 clock cycles (typ. 3µs) after the transition of Chip Select input (CSN) from low to high.

When coming from SBC Init, SBC Restart Mode or in certain cases from SBC Stop Mode, the watchdog timer is always started with a long open window. The long open window (t_{LW} = 200ms) allows the microcontroller to run its initialization sequences and then to trigger the watchdog via SPI.

The watchdog timer period can be selected via the watchdog timing bit field (**WD_TIMER**) and is in the range of 10 ms to 10000 ms. This setting is valid for both watchdog types.

The following watchdog timer periods are available:

- WD Setting 1: 10ms
- WD Setting 2: 20ms
- WD Setting 3: 50ms
- WD Setting 4: 100ms
- WD Setting 5: 200ms
- WD Setting 6: 500ms
- WD Setting 7: 1000ms
- WD Setting 8: 10000ms

In case of a watchdog reset, SBC Restart or SBC Fail-Safe Mode is entered according to the configuration and the SPI bits **WD_FAIL** are set. Once the RSTN goes high again the watchdog immediately starts with a long open window the SBC enters automatically SBC Normal Mode.

In SBC Development Mode the watchdog is off and therefore no reset is generated due to a watchdog failure.

Depending on the configuration, the **WD_FAIL** bits will be set after a watchdog trigger failure as follows:

- In case an incorrect WD trigger is received (triggering in the closed watchdog window or when the watchdog counter expires without a valid trigger) then the **WD_FAIL** bits will be increased (showing the number of incorrect WD triggers)
- For config 2: the bits can have the maximum value of ‘01’
- For config 1, 3 and 4: the bits can have the maximum value of ‘10’

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

The WD_FAIL bits are cleared automatically when following conditions apply:

- After a successful watchdog trigger
- When the watchdog is off: in SBC Stop Mode after successfully disabling it, in SBC Sleep Mode, or in SBC Fail-Safe Mode (except for a watchdog failure)

12.2.1 Time-Out Watchdog

The time-out watchdog is an easier and less secure watchdog than a window watchdog as the watchdog trigger can be done at any time within the configured watchdog timer period.

A correct watchdog service immediately results in starting a new watchdog timer period. Taking the tolerances of the internal oscillator into account leads to the safe trigger area as defined in Figure 38.

If the time-out watchdog period elapses, a watchdog reset is created by setting the reset output RSTN low and the SBC switches to SBC Restart or SBC Fail-Safe Mode.

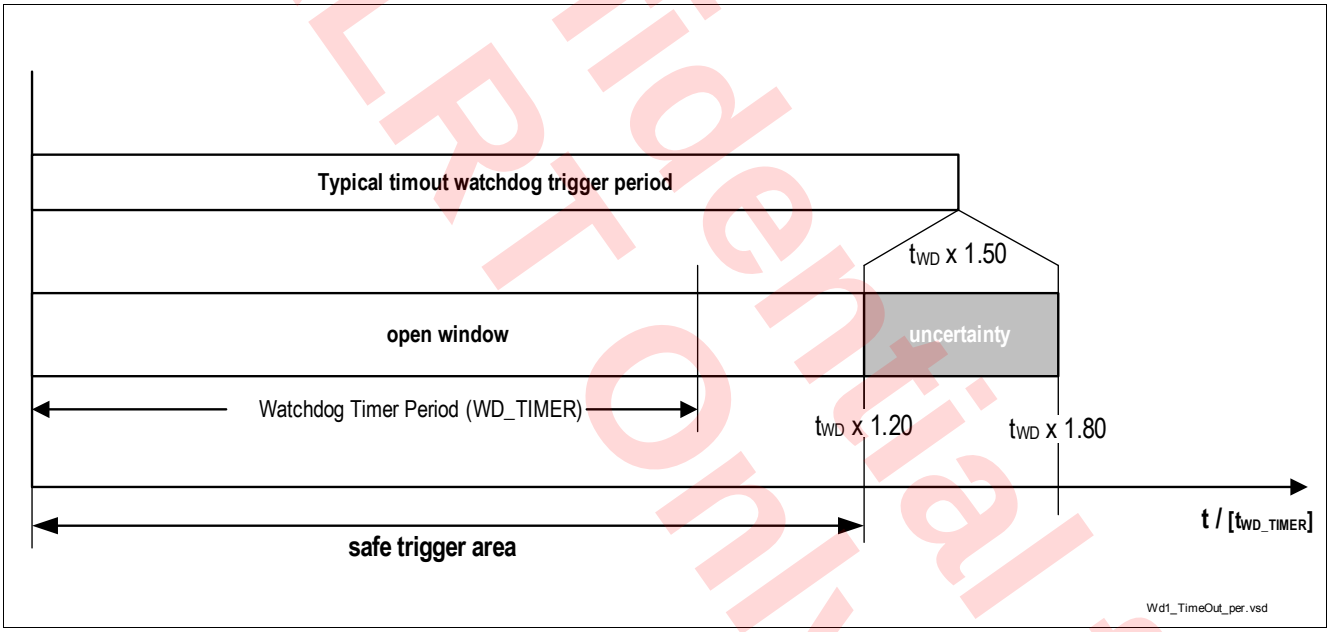

Figure 38 Time-out Watchdog Definitions

Confidential for ALRT Only

12.2.2 Window Watchdog

Compared to the time-out watchdog the characteristic of the window watchdog is that the watchdog timer period is divided between an closed and an open window. The watchdog must be triggered within the open window.

A correct watchdog trigger results in starting the window watchdog period by a closed window followed by an open window.

The watchdog timer period is at the same time the typical trigger time and defines the middle of the open window. Taking the oscillator tolerances into account leads to a safe trigger area of:

t_{WD} x 0.72 < safe trigger area < t_{WD} x 1.20.

The typical closed window is defined to a width of 60% of the selected window watchdog timer period. Taking the tolerances of the internal oscillator into account leads to the timings as defined in Figure 39.

A correct watchdog service immediately results in starting the next closed window.

Should the trigger signal meet the closed window or should the watchdog timer period elapse, then a watchdog reset is created by setting the reset output RSTN low and the SBC switches to SBC Restart or SBC Fail-Safe Mode.

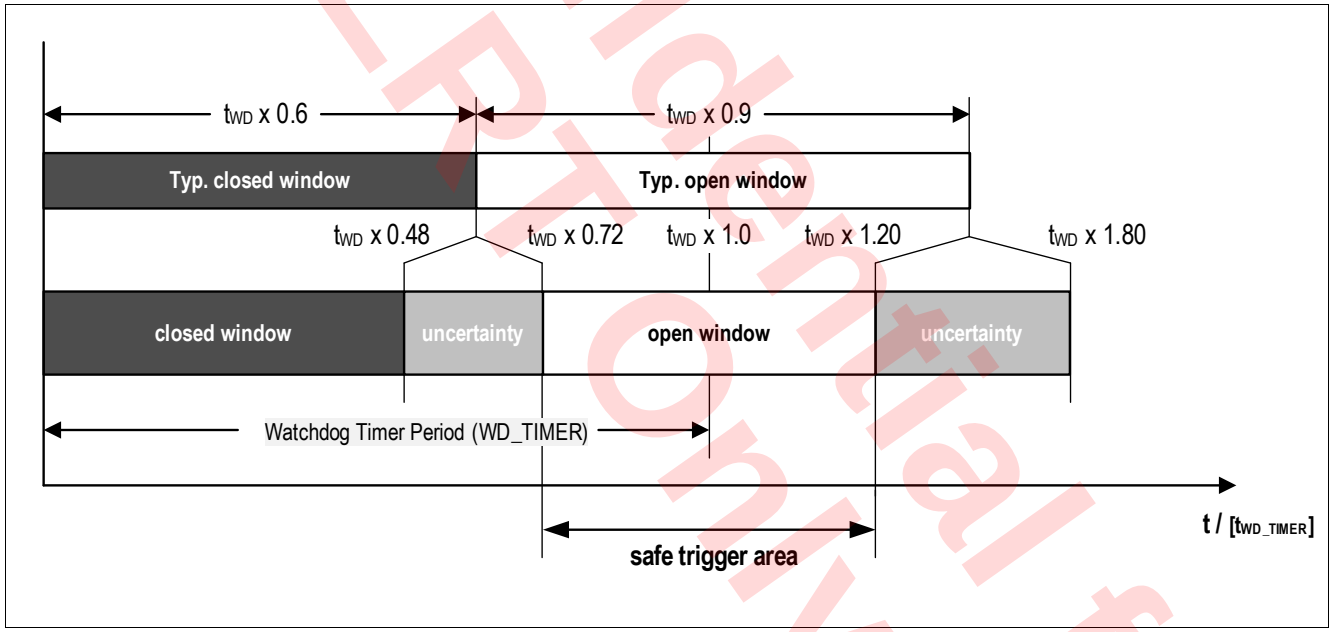

Figure 39 Window Watchdog Definitions

12.2.3 Watchdog Setting Check Sum

A check sum bit is part of the SPI command to trigger the watchdog and to set the watchdog setting.

The sum of the 8 data bits in the register WD_CTRL needs to have even parity (see Equation (12.1)). This is realized by either setting the bit CHECKSUM to 0 or 1. If the check sum is wrong, then the SPI command is ignored, i.e. the watchdog is not triggered or the settings are not changed and the bit SPI_FAIL is set.

Confidential for ALRT Only

The checksum is calculated by taking all 8 data bits into account. The written value of the reserved bit 3 of the WD_CTRL register is considered (even if read as '0' in the SPI output) for checksum calculation, i.e. if a 1 is written on the reserved bit position, then a 1 will be used in the checksum calculation.

(12.1)

$$CHKSUM = Bit15 \oplus \ldots \oplus Bit8$$

Confidential for ALRT Only

12.2.4 Watchdog during SBC Stop Mode

The watchdog can be disabled for SBC Stop Mode in SBC Normal Mode. For safety reasons, there is a special sequence to be followed in order to disable the watchdog as described in Figure 40. Two different SPI bits (WD_STM_ EN_0, WD_STM_ EN_1) in the registers WK_CTRL_0 and WD_CTRL need to be set.

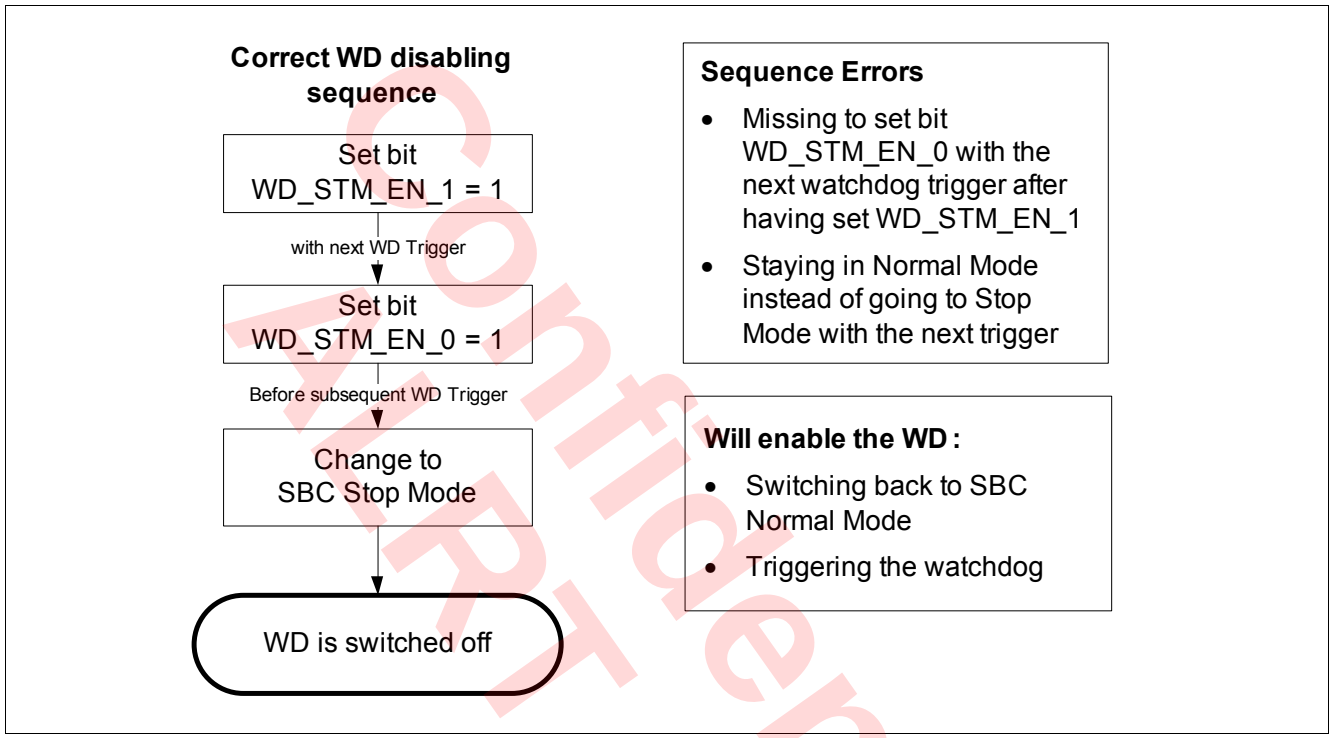

Figure 40 Watchdog disabling sequence in SBC Stop Mode

If a sequence error occurs, then the bit WD_STM_ EN_1 will be cleared and the sequence has to be started again.

The watchdog can be enabled by triggering the watchdog in SBC Stop Mode or by switching back to SBC Normal Mode via SPI command. In both cases the watchdog will start with a long open window and the bits WD_STM_EN_1 and WD_STM_ EN_0 are cleared. After the long open window the watchdog has to be served as configured in the WD_CTRL register.

Note: The bit WD_STM_ EN_0 will be cleared automatically when the sequence is started and it was 1 before. WD_STM_ EN_0 can also not be set if WD_STM_ EN_1 isn't yet set.

12.2.5 Watchdog Start in SBC Stop Mode due to Bus Wake

In SBC Stop Mode the Watchdog can be disabled. In addition a feature is available which will start the watchdog with any BUS wake (CAN) during SBC Stop Mode. The feature is enabled by setting the bit WD_EN_ WK_BUS = 1
(= default value after POR). The bit can only be changed in SBC Normal Mode and needs to be programmed before starting the watchdog disable sequence.

A wake on CAN will generate an interrupt and the RXD pin for CAN is pulled to low. By these signals the microcontroller is informed that the watchdog is startedwith a long open window. After the long open window the watchdog has to be served as configured in the WD_CTRL register.

To disable the watchdog again, the SBC needs to be switched to Normal Mode and the sequence needs to be sent again.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

12.3 VS Power On Reset

At power up of the device, the VS Power on Reset is detected when VS > $V_{POR,r}$ and the SPI bit POR is set to indicate that all SPI registers are set to POR default settings. VCC1 is starting up and the reset output will be kept low and will only be released once VCC1 has crossed $V_{RT1,r}$ and after t_{RD1} has elapsed.
In case VS < $V_{POR,f}$, an device internal reset will be generated and the SBC is switched off and will restart in INIT mode at the next VS rising. This is shown in Figure 41.

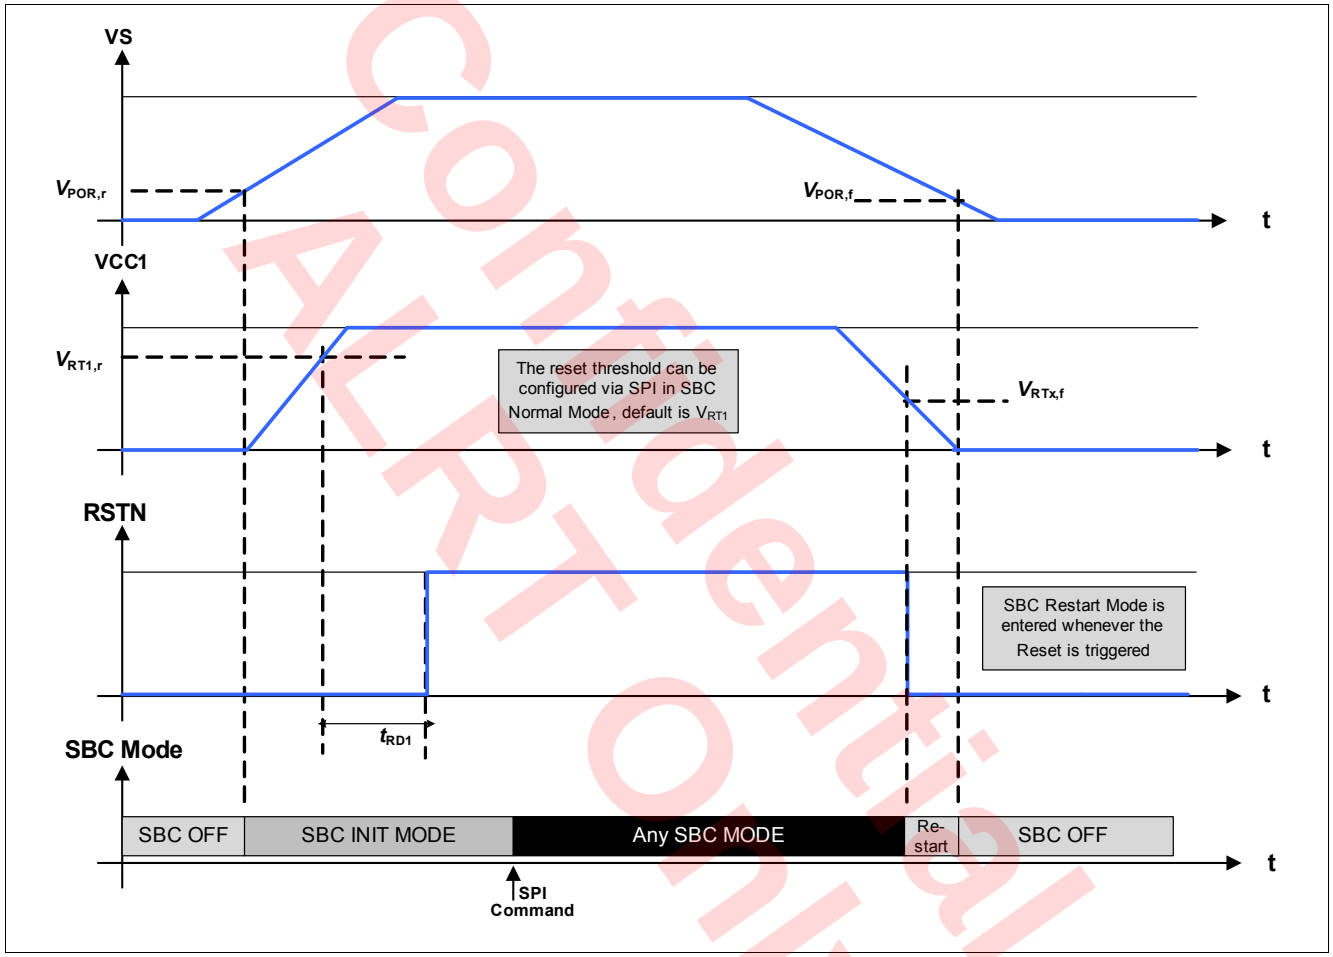

Figure 41 Ramp up / down example of Supply Voltage

12.4 VS Under- and Overvoltage

12.4.1 VS Undervoltage

The VS under-voltage monitoring is always active in SBC Init-, Restart- and Normal Mode (See below conditions for SBC Stop Mode). If the supply voltage VS reaches the undervoltage threshold $V_{S,UV}$ then the SBC does the following measures:

- SPI bit VS_UV is set. No other error bits are set. The bit can be cleared once the VS undervoltage condition is not present anymore
- The VCC1 short circuit protection becomes inactive (see Chapter 12.6). However, the thermal protection of the device remains active. if the undervoltage threshold is exceeded (VS rising) then the function will be automatically enabled again

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Note: VS under-voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements except if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold.

12.4.2 VS Overvoltage

The VS over-voltage monitoring is always active SBC Init-, Restart- and Normal Mode (see below note for conditions in SBC Stop Mode) or when the charge pump is enabled. If the supply voltage VS reaches the over-voltage threshold $V_{S,OV}$ then the SBC does the following measures:

- SPI bit VS_OV is set. This bit is intended for diagnosis only, i.e. or other error bits are set. The bit can be cleared once the VS over-voltage condition is not present anymore

If the charge pump is disabled after the bit $V_{S,OV}$ was set then the bit will stay set until it is cleared via SPI.

Note: VS over-voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements except if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold.

12.5 VCC1 Over-/ Undervoltage and Undervoltage Prewarning

12.5.1 VCC1 Undervoltage and Undervoltage Prewarning

This function is always active when the VCC1 voltage regulator is enabled.
A first-level voltage detection threshold is implemented as a prewarning for the microcontroller. The prewarning event is signaled with the bit VCC1_ WARN. No other actions are taken.

As described in Chapter 12.1 and Figure 42, a reset will be triggered (RSTN pulled low) when the V_{CC1} output voltage falls below the selected undervoltage threshold (V_{RTx}). The SBC will enter SBC Restart Mode and the bit VCC1_UV is set when RSTN is released again.

The hysteresis of the VCC1 undervoltage threshold can be increased artificially by setting the bit RSTN_HYS. In this case always the highest rising threshold (Vrt1,r) is used for the release of the undervoltage reset. The falling reset threshold will always remain as configured.

Note: The VCC1_ WARN or VCC1_UV bits are not set in Sleep Mode as V_{CC1} = 0V in this case

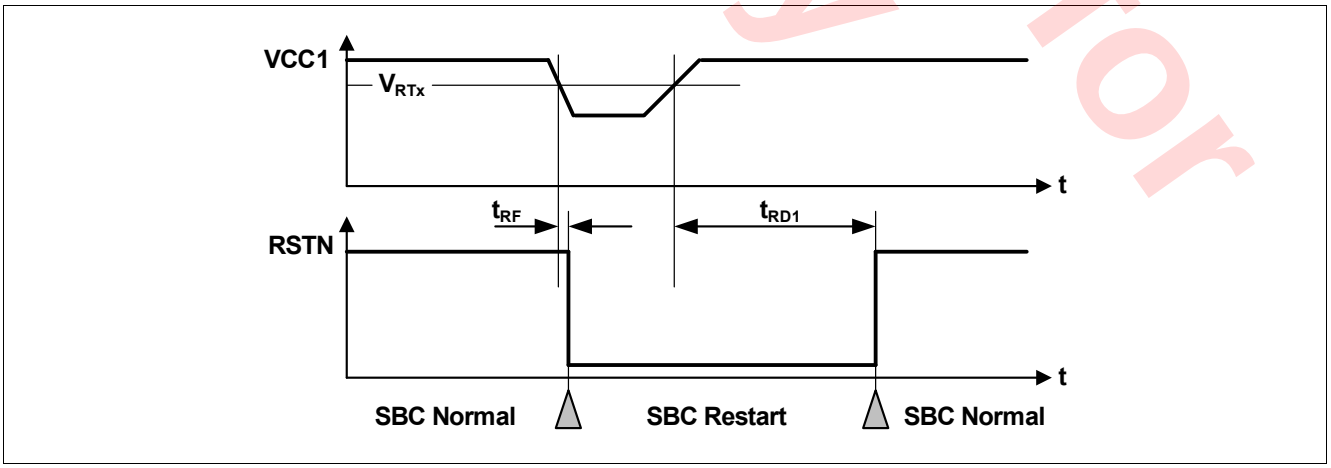

Figure 42 VCC1 Undervoltage Timing Diagram

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Note: It is recommended to clear the VCC1_ WARN and VCC1_UV bit once it is detected by the microcontroller software to verify if the undervoltage still exists or not.

12.5.2 VCC1 Overvoltage

For fail-safe reasons a configurable VCC1 over voltage detection feature is implemented. It is active when the VCC1 voltage regulator is enabled.

In case the $V_{CC1,OV,r}$ threshold is crossed, the SBC triggers following measures depending on the configuration:

- The bit VCC1_ OV is always set;
- If the bit VCC1_OV_RST is set and CFG0_STATE = '1', then SBC Restart Mode is entered. The FO output is activated. After the reset delay time (t_{RD1}), the SBC Restart Mode is left and SBC Normal Mode is resumed even if the VCC1 over voltage event is still present (see also Figure 43). The VCC1_OV_RST bit is cleared automatically;
- If the bit VCC1_OV_RST is set and CFG0_STATE = '0', then SBC Fail-Safe Mode is entered and FO output is activated.

Note: External noise could be coupled into the VCC1 supply line. Especially, in case the VCC1 output current in SBC STOP Mode is below the active peak threshold ($I_{VCC1,Ipeak}$) it should be considered to clear the bit VCC1_OV_RST before entering SBC Stop Mode to avoid unintentional SBC Restart or Fail-Safe Mode entry and to ignore the VCC1_ OV bit due to external noise.

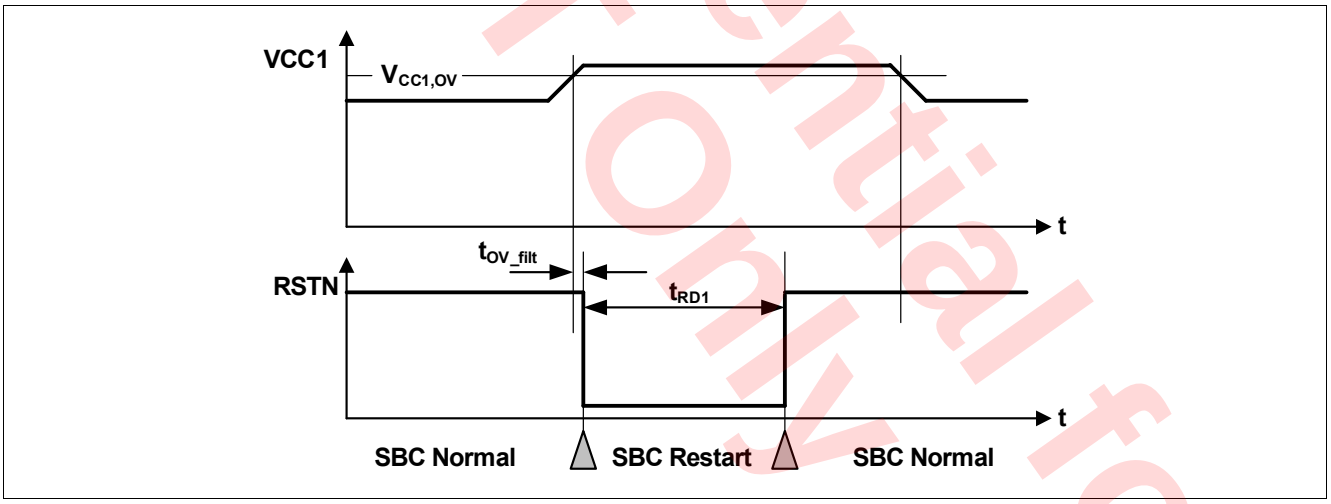

Figure 43 VCC1 Over Voltage Timing Diagram

12.6 VCC1 Short Circuit Diagnostics

The short circuit protection feature for V_{CC1} is implemented as follows:

- The short circuit detection is only enabled if VS > $V_{S,UV}$
- If VCC1 is not above the V_{RTx} within $t_{VCC1,SC}$ after device power up or after waking from SBC Sleep or Fail-Safe Mode (i.e. after VCC1 is enabled) then the SPI bit VCC1_SC bit is set, VCC1 is turned off, the FO pin is enabled, FAILURE is set and SBC Fail-Safe Mode is entered. The SBC can be activated again via a wake on CAN and WK or GPIO if configured as wake input.
- The same behavior applies, if V_{CC1} falls below V_{RTx} for longer than $t_{VCC1,SC}$.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

12.7 VCC2 Undervoltage and VCAN Undervoltage

An undervoltage warning is implemented for VCC2 and VCAN as follows:

- V_{CC2} undervoltage detection: In case V_{CC2} is enabled and will drop below the $V_{CC2,UV,f}$ threshold, then the SPI bit **VCC2_UV** is set and can be only cleared via SPI. During power-up the blanking time $t_{VCC2,Blank}$ applies, i.e. no undervoltage warning bit is set during this time.
- V_{CAN} undervoltage detection: In case *the CAN module is enabled and the voltage on* V_{CAN} will drop below the $V_{CAN_UV,f}$ threshold, then the SPI bit **VCAN_UV** is set and can be only cleared via SPI.

Note: The VCC2_UV flag is not set during turn-on or turn-off of V_{CC2}.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

12.8 Thermal Protection

Three independent and different thermal protection features are implemented in the SBC according to the system impact:

- Individual thermal shutdown of specific blocks
- Temperature prewarning of main microcontroller supply VCC1
- SBC thermal shutdown due to VCC1 overtemperature

12.8.1 Individual Thermal Shutdown

As a first-level protection measure the output stages VCC2 and CAN are independently switched off if the respective block reaches the temperature threshold TjTSD1. Then the TSD1 bit is set. This bit can only be cleared via SPI once the overtemperature is not present anymore. Independent of the SBC Mode the thermal shutdown protection is only active if the respective block is on.

The respective modules behave as follows:

- VCC2: Is switched to off and the control bits VCC2_ON are cleared. The status bit VCC2_OT is set. Once the overtemperature condition is not present anymore, then VCC2 has to be configured again by SPI.
- CAN: The transmitter is disabled and stays in CAN Normal Mode acting like CAN Receive only mode. The status bits CAN_FAIL = '01' are set. Once the overtemperature condition is not present anymore, then the CAN transmitter is automatically switched on.

Note: The diagnosis bits are not cleared automatically and have to be cleared via SPI once the overtemperature condition is not present anymore.

12.8.2 Temperature Prewarning

As a next level of thermal protection a temperature prewarning is implemented if the main supply VCC1 reaches the thermal prewarning temperature threshold T_{jPW}. Then the status bit TPW is set. This bit can only be cleared via SPI once the overtemperature is not present anymore.

12.8.3 SBC Thermal Shutdown

As a highest level of thermal protection a temperature shutdown of the SBC is implemented if the main supply VCC1 reaches the thermal shutdown temperature threshold TjTSD2. Once a TSD2 event is detected SBC Fail-Safe Mode is entered. Only when device temperature falls below the TSD2 threshold then the device remains in SBC Fail-Safe Mode for t_{TSD2} to allow the device to cool down. After this time has expired, the SBC will automatically change via SBC Restart Mode to SBC Normal Mode (see also Chapter 5.1.6).

When a TSD2 event is detected, then the status bit TSD2 is set. This bit can only be cleared via SPI in SBC Normal Mode once the overtemperature is not present anymore.

For increased robustness requirements it is possible to extend the TSD2 waiting time by 64x of t_{TSD2} after 16 consecutive TSD2 events by setting the SPI bit TSD2_DEL. The counter is incremented with each TSD2 event even if the bit TSD2 is not cleared. Once the counter has reached the value 16, then the bit TSD2_SAFE is set and the extended TSD2 waiting time is active. The extended waiting time will be kept until TSD2_SAFE is cleared. The TSD counter is cleared when TSD2 or TSD2_DEL is cleared.

Note: In case a TSD2 overtemperature occurs while entering SBC Sleep Mode then SBC Fail-Safe mode is still entered.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

12.9 Electrical Characteristics

Table 33 Electrical Characteristics

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
VCC1 Monitoring;							
Undervoltage Prewarning Threshold Voltage PW,f	$V_{PW,f}$	4.53	4.70	4.84	V	VCC1 falling, SPI bit is set	P_13.9.1
Undervoltage Prewarning Threshold Voltage PW,r	$V_{PW,r}$	4.60	4.75	4.90	V	VCC1 rising	P_13.9.2
Undervoltage Prewarning Threshold Voltage hysteresis	$V_{PW,hys}$	30	50	90	mV	5)	P_13.9.3
VCC1 UV Prewarning Detection Filter Time	t_{VCC1,PW_F}	5	10	14	us	3) rising and falling	P_13.9.4
Reset Threshold Voltage RT1,f	$V_{RT1,f}$	4.45	4.6	4.75	V	default setting; VCC1 falling	P_13.9.5
Reset Threshold Voltage RT1,r	$V_{RT1,r}$	4.58	4.74	4.90	V	default setting; VCC1 rising	P_13.9.6
Reset Threshold Voltage RT2,f	$V_{RT2,f}$	3.70	3.85	4.00	V	VCC1 falling	P_13.9.7
Reset Threshold Voltage RT2,r	$V_{RT2,r}$	3.85	4.0	4.15	V	VCC1 rising	P_13.9.8
Reset Threshold Voltage RT3,f	$V_{RT3,f}$	3.24	3.40	3.55	V	VS ≥ 4V; VCC1 falling	P_13.9.9
Reset Threshold Voltage RT3,r	$V_{RT3,r}$	3.39	3.54	3.70	V	VS ≥ 4V; VCC1 rising	P_13.9.10
Reset Threshold Voltage RT4,f	$V_{RT4,f}$	2.49	2.65	2.8	V	VS ≥ 4V; VCC1 falling	P_13.9.11
Reset Threshold Voltage RT4,r	$V_{RT4,r}$	2.65	2.76	2.95	V	VS ≥ 4V; VCC1 rising	P_13.9.12
Reset Threshold Hysteresis	$V_{RT,hys}$	70	140	220	mV	5)	P_13.9.13
VCC1 Over Voltage Detection Threshold Voltage	$V_{CC1,OV,r}$	5.6	5.8	6.0	V	1)5)rising VCC1	P_13.9.26
VCC1 Over Voltage Detection Threshold Voltage	$V_{CC1,OV,f}$	5.48	5.65	5.82	V	5)falling VCC1	P_13.9.27
VCC1 Over Voltage Detection hysteresis	$V_{CC1,OV,hys}$	50	100	200	mV	5)	P_13.9.30
VCC1 OV Detection Filter Time	t_{VCC1,OV_F}	51	64	80	us	3)	P_13.9.31

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 33 Electrical Characteristics (cont'd)

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
VCC1 Short to GND Filter Time	$t_{VCC1,SC}$	1.6	2	2.4	ms	[3]blanking time during power-up, short circuit detection for VS ≥ VS,UV	P_13.9.32
Reset Generator; Pin RSTN							
Reset Low Output Voltage	$V_{RSTN,L}$	–	0.2	0.4	V	I_{RSTN} = 1 mA for V_{CC1} ≥ 1 V & $V_S \geq V_{POR,f}$	P_13.9.33
Reset High Output Voltage	$V_{RSTN,H}$	0.8 x V_{CC1}	–	V_{CC1} + 0.3 V	V	I_{RSTN} = -20 µA	P_13.9.34
Reset Pull-up Resistor	R_{RSTN}	10	20	40	kΩ	V_{RSTN} = 0 V	P_13.9.35
Reset Filter Time	t_{RF}	4	10	26	µs	[3]$V_{CC1} < V_{RT1x}$ to RSTN = L see also Chapter 12.3	P_13.9.36
Reset Delay Time (long)	t_{RD1}	8	10	12	ms	[2] [3]RSTN_DEL = '0' (default value)	P_13.9.37
Reset Delay Time (reduced)	t_{RD2}	1.6	2	2.4	ms	[2] [3]RSTN_DEL = '1'	P_13.9.37
VCC2 Monitoring							
VCC2 Undervoltage Threshold Voltage (falling)	$V_{CC2,UV,f}$	4.5	–	4.75	V	VCC2 falling	P_13.9.38
VCC2 Undervoltage Threshold Voltage (rising)	$V_{CC2,UV,r}$	4.6	–	4.85	V	VCC2 rising	P_13.9.39
V_{CC2} Undervoltage detection hysteresis	$V_{CC2,UV,hys}$	70	150	250	mV	[5]–	P_13.9.40
VCC2 Undervoltage Detection Filter Time	t_{VCC2,UV_F}	5	10	14	us	[3] rising and falling	P_13.9.41
VCC2 UV Blanking Time	$t_{VCC2,Blank}$	3.2	4	4.8	ms	[3] after switching on	P_13.9.42
VCAN Monitoring							
CAN Supply undervoltage detection threshold (falling)	$V_{CAN_UV,f}$	4.5	–	4.75	V	VCAN falling	P_13.9.43
CAN Supply undervoltage detection threshold (rising)	$V_{CAN_UV,r}$	4.6	–	4.85	V	VCAN rising	P_13.9.44
V_{CAN} Undervoltage detection hysteresis	$V_{CAN,UV,hys}$	70	150	250	mV	[5]–	P_13.9.45
VCAN UV detection Filter Time	t_{VCAN,UV_F}	4.2	10	14	µs	[3] VCAN rising and falling	P_13.9.46
Watchdog Generator / Internal Oscillator							

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Table 33 Electrical Characteristics (cont'd)

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Long Open Window	t_{LW}	160	200	240	ms	3)	P_13.9.47
Internal Clock Generator Frequency	$f_{CLKSBC,1}$	0.8	1.0	1.2	MHz	–	P_13.9.48
Internal Oscillator 2MHz for Charge Pump and SMPS Regulator	$f_{CLKSBC,2}$	1.8	2.0	2.2	MHz	2MHZ_FREQ ='001';	P_13.9.65
Minimum Waiting time during SBC Fail-Safe Mode							
Min. waiting time Fail-Safe	$t_{FS,min}$	80	100	120	ms	3)4)	P_13.9.49
Power-on Reset, Over / Undervoltage Protection							
VS Power on reset rising	$V_{POR,r}$	–		4.5	V	VS increasing	P_13.9.50
VS Power on reset falling	$V_{POR,f}$	–		3	V	VS decreasing	P_13.9.51
VS Undervoltage Detection Threshold	$V_{S,UV}$	5.3	–	6.0	V	Supply UV threshold for VCC1 SC detection; hysteresis included; includes rising and falling threshold	P_13.9.52
VS Undervoltage Detection Hysteresis	$V_{S,UV,hys}$	180	220	260	mV	5)–	P_13.9.67
VS Undervoltage Detection Filter Time	$t_{VS,UV}$	5	10	14	us	3) rising and falling	P_13.9.62
VS Over voltage Detection Threshold	$V_{S,OV}$	22	–	25	V	5)Supply OV threshold; only SPI diagnosis bit is set; includes rising and falling threshold	P_13.9.63
VS Overvoltage Detection Filter Time	$t_{VS,OV}$	5	10	14	us	3) rising and falling	P_13.9.64
VS Overvoltage Detection Hysteresis	$V_{S,OV,hys}$	0.3	–	0.55	V	5)	P_13.9.69
Overtemperature Shutdown[5]							
Thermal Prewarning Temperature	T_{jPW}	125	145	165	°C	T_j rising	P_13.9.54
Thermal Shutdown TSD1 (high temp)	T_{jTSD1_2}	180	195	210	°C	T_j rising; TSD_THR = 1	P_13.9.60

Confidential for ALRT Only

Confidential for ALRT Only

Table 33 Electrical Characteristics (cont'd)

V_S = 5.5 V to 28 V; T_j = -40°C to +150°; SBC Normal Mode; all voltages with respect to ground; positive current defined flowing into pin; unless otherwise specified.

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Thermal Shutdown TSD2 (high temp)	T_{jTSD2_2}	180	195	210	°C	T_j rising; TSD_THR = 1	P_13.9.61
Thermal Shutdown hysteresis	$T_{jTSD,hys}$	–	25	–	°C	5)	P_13.9.57
TSD/TPW Filter Time	$t_{TSD_TPW_F}$	5	10	14	us	rising and falling, applies to all thermal sensors (TPW, TSD1, TSD2)	P_13.9.58
Deactivation time after thermal shutdown TSD2	t_{TSD2}	0.8	1	1.2	s	3)	P_13.9.59

1) It is ensured that the threshold $V_{CC1,OV,r}$ is always higher than the highest regulated V_{CC1} output voltage $V_{CC1,out4}$.

2) The reset delay time will start when VCC1 crosses above the selected Vrtx threshold

3) Not subject to production test, tolerance defined by internal oscillator tolerance.

4) This time applies for all failure entries except a device thermal shutdown (TSD2 has a typ. 1s waiting time t_{TSD2})

5) Not subject to production test, specified by design.

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

13 Serial Peripheral Interface

The Serial Peripheral Interface is the communication link between the SBC and the microcontroller.

The TLE9471-3ES is supporting multi-slave operation in full-duplex mode with 16-bit and 32-bit data access (see also Figure 46).

The SPI behavior for the different SBC Modes is as follows:

- The SPI is enabled in SBC Init, Normal and Stop Mode
- The SPI is OFF in SBC Sleep, Restart and Fail-Safe Mode

13.1 SPI Block Description

The Control Input Word is read via the data input SDI, which is synchronized with the clock input CLK provided by the microcontroller. The output word appears synchronously at the data output SDO (see Figure 44 with a 16-bit data access example).

The transmission cycle begins when the chip is selected by the input CSN (Chip Select Not), LOW active. After the CSN input returns from LOW to HIGH, the word that has been read is interpreted according to the content. The SDO output switches to tristate status (high impedance) at this point, thereby releasing the SDO bus for other use.The state of SDI is shifted into the input register with every falling edge on CLK. The state of SDO is shifted out of the output register after every rising edge on CLK. The SPI of the SBC is not daisy chain capable.

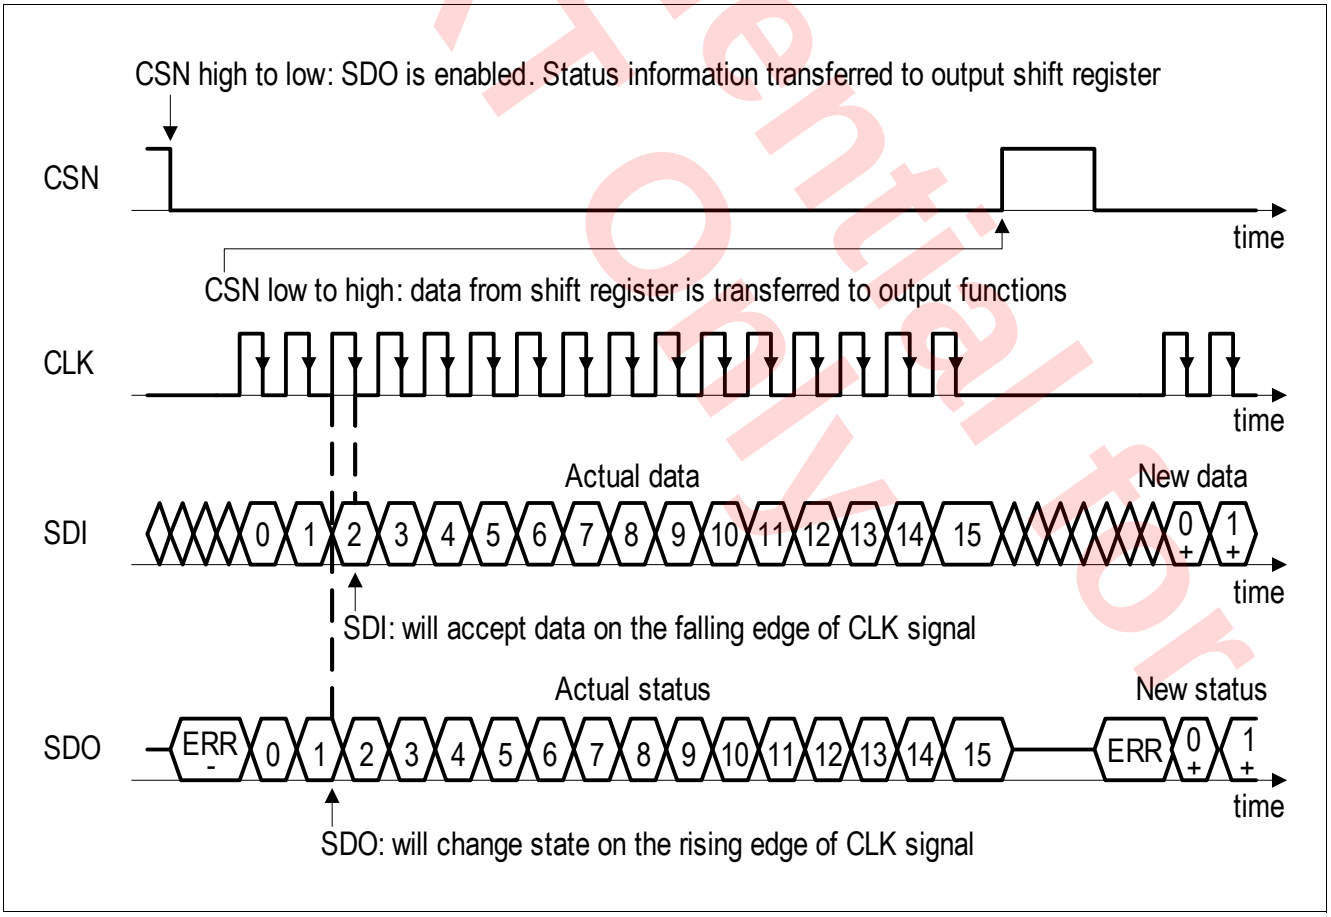

Figure 44 SPI Data Transfer Timing (note the reversed order of LSB and MSB shown in this figure compared to the register description)

Confidential for ALRT Only

Confidential for ALRT Only

13.2 Failure Signalization in the SPI Data Output

When the microcontroller sends a wrong SPI command to the SBC, the SBC ignores the information. Wrong SPI commands are either invalid SBC mode commands or commands which are prohibited by the state machine to avoid undesired device or system states (see below). In this case the diagnosis bit 'SPI_FAIL' is set and the SPI Write command is ignored (mostly no partial interpretation). This bit can be only reset by actively clearing it via a SPI command.

Invalid SPI Commands leading to SPI_FAIL are listed below (in this case the SPI command is ignored):

- Illegal state transitions:
  - Going from SBC Stop to SBC Sleep Mode. In this case the SBC enters SBC Restart Mode;
  - Trying to go to SBC Stop or SBC Sleep Mode from SBC Init Mode. In this case SBC Normal Mode is entered
- Uneven parity in the data bit of the WD_CTRL register. In this case the watchdog trigger is ignored and/or the new watchdog settings are ignored respectively
- In SBC Stop Mode: attempting to change any SPI settings, e.g. changing the watchdog configuration, PWM settings and HS configuration settings during SBC Stop Mode, etc.;
  the SPI command is ignored in this case;
  only WD trigger, returning to Normal Mode, triggering a SBC Soft Reset, and Read & Clear status registers commands are valid SPI commands in SBC Stop Mode;
  Note: No failure handling is done for the attempt to go to SBC STOP Mode when all bits in the registers BUS_CTRL_0 and WK_CTRL_1 are cleared because the microcontroller can leave this mode via SPI
- When entering SBC Stop Mode and WK_STAT_0 and WK_STAT_1 are not cleared; SPI_FAIL will not be set but the INTN pin will be triggered
- Changing from SBC Stop to Normal Mode and changing the other bits of the M_S_CTRL register. The other modifications will be ignored
- SBC Sleep Mode: attempt to go to Sleep Mode without any wake source set, i.e. when all bits in the BUS_CTRL_0, WK_CTRL_0, WK_CTRL_1 and GPIO_CTRL registers are cleared. In this case the SPI_FAIL bit is set and the device enters SBC Restart Mode.
  Even though the Sleep Mode command is not entered in this case, the rest of the command (e.g modifying VCC2) is executed but restart values apply during SBC Restart Mode;
  Note: At least one wake source must be activated in order to avoid a deadlock situation in SBC Sleep Mode, i.e. the SBC would not be able to wake up anymore.
  If the only wake source is a timer and the timer is OFF then the SBC will wake immediately from Sleep Mode and enter Restart Mode;
- Trying to set WK_MEAS when FO/GPIO is not off, i.e. FO is activated/configured or any GPIO configuration is selected
- Trying to change the GPIO_CTRL settings in case WK_MEAS is set
- Setting a longer or equal on-time than the timer period of the respective timer
- SDI stuck at HIGH or LOW, e.g. SDI received all '0' or all '1'

Note: There is no SPI fail information for unused addresses.

Signalization of the ERR Flag (high active) in the SPI Data Output (see Figure 44):

The ERR flag presents an additional diagnosis possibility for the SPI communication. The ERR flag is being set for following conditions:

- in case the number of received SPI clocks is not 0 or 16 or 32
- in case RSTN is LOW and SPI frames are being sent at the same time.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Note: In order to read the SPI ERR flag properly, CLK must be low when CSN is triggered, i.e. the ERR bit is not valid if the CLK is high on a falling edge of CSN

The number of received SPI clocks is not 0, 16 or 32:

The number of received input clocks is supervised to be 0 or 16 or 32 clock cycles and the input word is discarded in case of a mismatch (0 clock cycle to enable ERR signalization). The error logic also recognizes if CLK was high during CSN edges. Both errors - 0 or 16 or 32 bit CLK mismatch or CLK high during CSN edges - are flagged in the following SPI output by a “HIGH” at the data output (SDO pin, bit ERR) before the first rising edge of the clock is received. The complete SPI command is ignored in this case.

RSTN is LOW and SPI frames are being sent at the same time:

The ERR flag will be set when the RSTN pin is triggered (during SBC Restart) and SPI frames are being sent to the SBC at the same time. The behavior of the ERR flag will be signalized at the next SPI command for below conditions:

- if the command begins when RSTN is HIGH and it ends when RSTN is LOW,
- if a SPI command will be sent while RSTN is LOW,
- If a SPI command begins when RSTN is LOW and it ends when RSTN is HIGH.

and the SDO output will behave as follows:

- always when RSTN is LOW then SDO will be HIGH,
- when a SPI command begins with RSTN is LOW and ends when RSTN is HIGH, then the SDO should be ignored because wrong data will be sent.

Note: It is possible to quickly check for the ERR flag without sending any data bits. i.e. only the CSN is pulled low and SDO is observed - no SPI Clocks are sent in this case

Note: The ERR flag could also be set after the SBC has entered SBC Fail-Safe Mode because the SPI communication is stopped immediately.

Confidential for ALRT Only

13.3 SPI Programming

For the TLE9471-3ES, 7 bits are used or the address selection (BIT6...0). Bit 7 is used to decide between Read Only and Read & Clear for the status bits, and between Write and Read Only for configuration bits. For the actual configuration and status information, 8 data bits (BIT15...8) are used.

Writing, clearing and reading is done byte wise. The SPI status bits are not cleared automatically and must be cleared by the microcontroller, e.g. if the TSD2 was set due to over temperature. Some of the configuration bits will automatically be cleared by the SBC - please refer to the respective register descriptions for detailed information. In SBC Restart Mode, the device ignores all SPI communication, i.e. it does not interpreted it.

There are two types of SPI registers:

- Control registers: These registers are used to configure the SBC, e.g. SBC mode, watchdog trigger, etc.
- Status registers: These registers indicate the status of the SBC, e.g. wake events, warnings, failures, etc.

For the status registers, the requested information is given in the same SPI command in the data out (SDO). For the control registers, the status of each byte is shown in the same SPI command as well. However, configuration changes of the same register are only shown in the next SPI command (configuration changes inside the SBC become valid only after CSN changes from low to high).

Writing of control registers is possible in SBC Init and Normal Mode. During SBC Stop Mode only the change to SBC Normal Mode and triggering the watchdog is allowed as well as reading and clearing the status registers.

Certain SPI control bits used to configure device functionality can be locked to avoid unintentional bit modification. The respective bit type is ‘rwl’. There are two levels of configuration locks:

- CFG_LOCK_0 in the HW_CTRL_1 is the level 0 lock mechanism: The bits CP_EN and GPIO can be locked. In case the configuration must be changed then CFG_LOCK_0 must be cleared first
- CFG_LOCK_1 in the HW_CTRL_2 is the level 1 lock mechanism: All other lockable bits with the type ‘rwl’ are locked and can only be modified at the next device power up

No status information can be lost, even if a bit changes right after the first 7 SPI clock cycles before the SPI frame ends. In this case the status information field will be updated with the next SPI command. However, the flag is already set in the relevant status register.
The SBC status information from the SPI status registers is transmitted in a compressed format with each SPI response on SDO in the so-called Status Information Field register (see also Figure 45). The purpose of this register is to quickly signal changes in the SPI status registers to the microcontroller. This means that the microcontroller only needs to read registers which have changed.

Each bit in the Status Information Field represents a SPI status register (see Table 34). As soon as one bit is set in one of the status registers, the corresponding bit in the Status Information Field register will be set. Only the most important registers are represented in the Status Information Field, e.g. the register WK_LVL_STAT is not included.

For example if bit 0 in the Status Information Field is set to ‘1’, one or more bits of the register 100 0001 (SUP_STAT_0) are set to 1. Then this register needs to be read with a second SPI command. The bit in the Status Information Field will be set to 0 when all bits in the register 100 0001 have been reset to ‘0’.

Table 34 Status Information Field

Bit in Status Information Field	Corresponding Address Bit	Status Register Description
0	100 0001	SUP_STAT_0 - Supply Status: POR, VCC2 fail, VCC1 fail
1	100 0010	THERM_STAT - Thermal Protection Status

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Table 34 Status Information Field (cont'd)

Bit in Status Information Field	Corresponding Address Bit	Status Register Description
2	100 0011	DEV_STAT- Device Status: Mode before wake/failure, WD Fail, SPI Fail, Failure
3	100 0100	BUS_STAT - Bus Failure Status: CAN;
4	100 0110 100 0111	WK_STAT_0, WK_STAT_1 - Wake Source Status; Status bit is a combinational OR of both registers
5	100 0000	SUP_STAT_1: VS_UV, VCC1_WARN/OV
6	101 0100	GPIO_OC_STAT: GPIO over current
7	101 0101	GPIO_OL_STAT: GPIO open load

Figure 45 SPI Operation Mode

32-bit Register Access for SWK Control Registers

The operation of the 16-bit and 32-bit SPI data access is shown in Figure 46.

The 32-bit SPI data access is only available for the Selective Wake register addresses 010 0000 to 011 1111. The registers SWK_OSC_CAL_H_STAT and SWK_OSC_CAL_L_STAT are excluded from the 32-bit SPI access.

The TLE9471-3ES tolerates reserved register access, i.e. registers that do not exist. In this case the next existing register address is accessed. If the available address space is exceeded during a SPI command, e.g. higher than address '011 1111', then the higher addresses are ignored and the return value is '0x00' for those addresses.

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

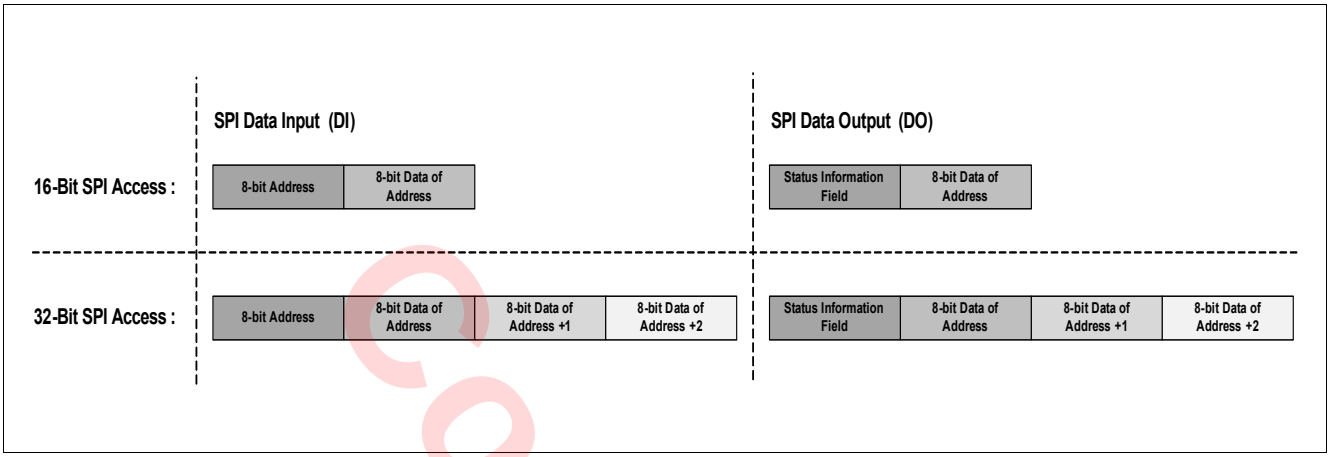

Figure 46 Data access for 16- and 32-bit SPI commands

13.4 SPI Bit Mapping

The following figures show the mapping of the registers and the SPI bits of the respective registers.

The Control Registers ‘000 0000’ to ‘001 1110’ are Read/Write Register. The registers ‘010 0000’ to ‘011 1111’ are dedicated control registers for CAN Partial Networking (=Selective Wake). Depending on bit 7 the bits are only read (setting bit 7 to ‘0’) or also written (setting bit 7 to ‘1’). The new setting of the bit after a write can be seen with a new read / write command.

The registers ‘100 0000’ to ‘111 1110’ are Status Registers and can be read or read with clearing the bit (if possible) depending on bit 7. To clear a Data Byte of one of the Status Registers bit 7 must be set to 1. The registers WK_LVL_STAT, and FAM_PROD_STAT, SWK_OSC_CAL_H_STAT, SWK_OSC_CAL_L_STAT, SWK_STAT, SWK_ECNT_STAT, SWK_CDR_STAT1, SWK_CDR_STAT2 are an exception as they show the actual voltage level at the respective WK pin (LOW/HIGH), or a fixed family/ product ID respectively and can thus not be cleared. It is recommended for proper diagnosis to clear respective status bits for wake events or failure. However, in general it is possible to enable drivers without clearing the respective failure flags.

When changing to a different SBC Mode, certain configurations bits will be cleared automatically or modified:

- The SBC Mode bits are updated to the actual status, e.g. when returning to Normal Mode
- When changing to a low-power mode (Stop/Sleep), the diagnosis bits of the switches and transceivers are not cleared. FO will stay activated if it was triggered before.
- When changing to SBC Stop Mode, the CAN control bits will not be modified.
- When changing to SBC Sleep Mode, the CAN control bits will be modified if they were not OFF or wake capable before.
- VCC2 will stay on when going to Sleep-/Stop Mode (configuration can only be done in Normal Mode). Diagnosis is active (OT). In case of a failure the regulator is turned off and no wake-up is issued
- The configuration bits for VCC2 in stand-alone configuration are cleared in SBC Restart Mode. FO will stay activated if it was triggered before. Depending on the respective configuration, CAN transceivers will be either OFF, woken or still wake capable.

Note: The detailed behavior of the respective SPI bits and control functions is described in Chapter 13.5, Chapter 13.6.and in the respective module chapter. The bit type be marked as ‘rwh’ in case the SBC will modify respective control bits.

Confidential for ALRT only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

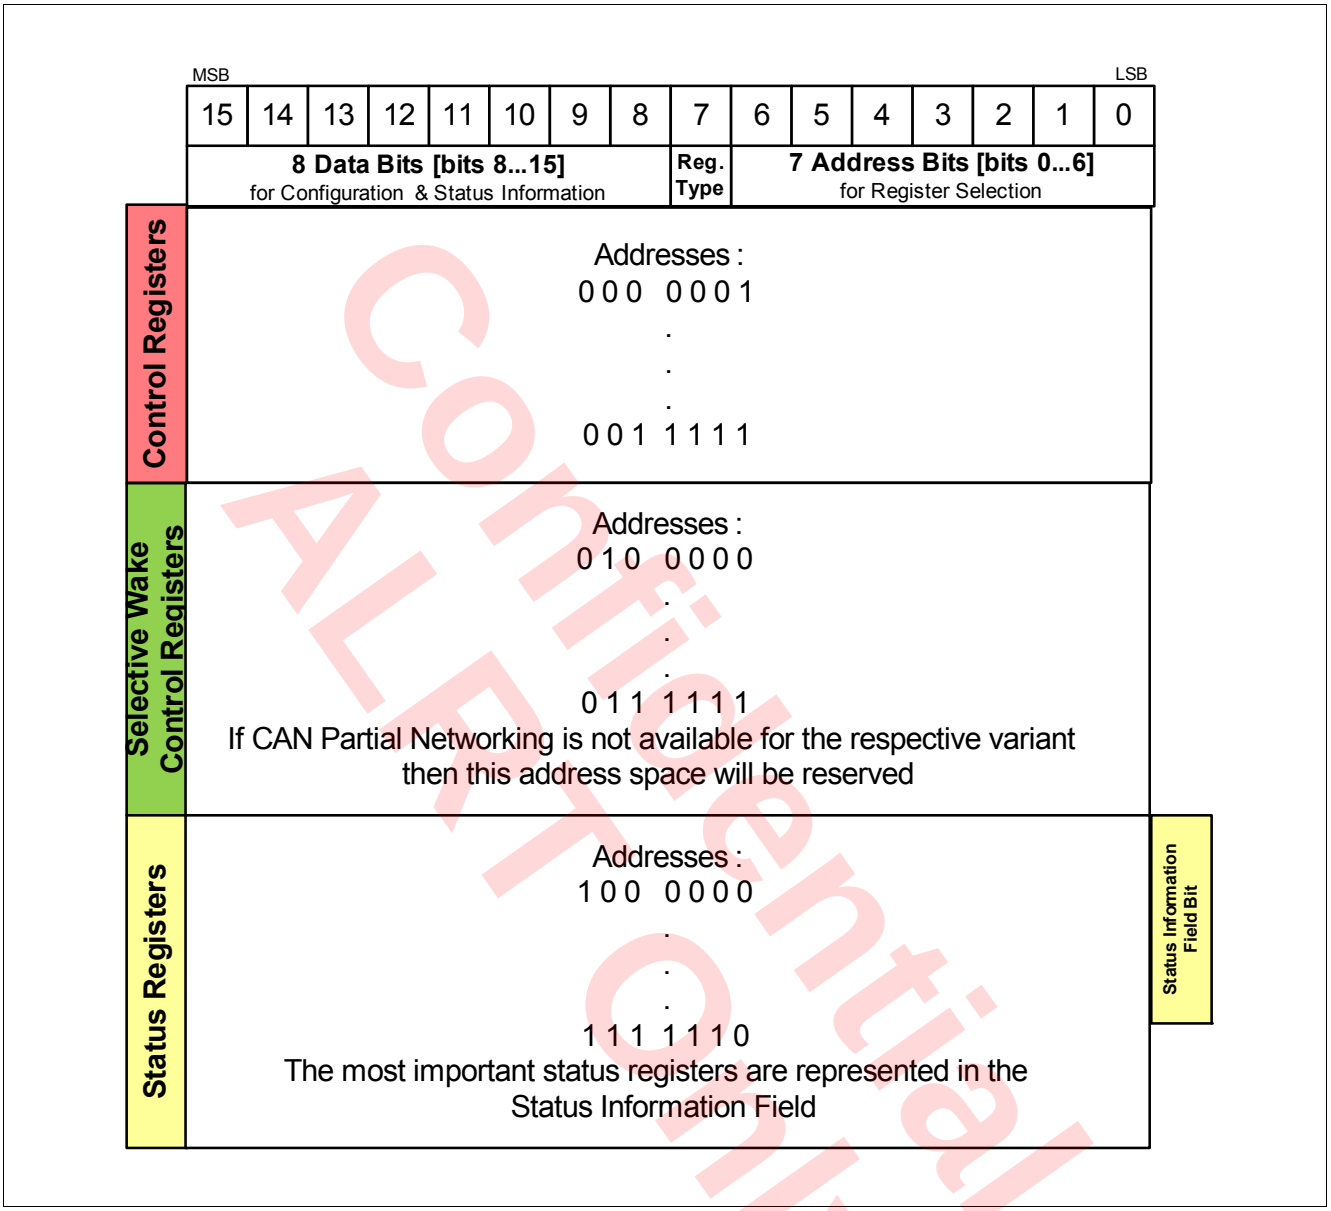

Figure 47 SPI Register Mapping Structure

The detailed register mappings for control registers and status registers are shown in Table 35 and Table 38 respectively.

The detailed SPI bit mapping overview is shown in Figure 48.

Confidential for ALRT Only

Register Short Name	15	14	13	12	11	10	9	8	7	6...0
	Data Bit 15...8								Access Mode	Address A6...A0
	D7	D6	D5	D4	D3	D2	D1	D0		
CONTROL REGISTERS										
M_S_CTRL	MODE_1	MODE_0	reserved	VCC2_ON_1	VCC2_ON_0	VCC1_OV_RST	VCC1_RT_1	VCC1_RT_0	read/write	0000001
HW_CTRL_0	reserved	OFT_RESET_RST	FO_ON	reserved	reserved	CP_EN	reserved	CFG1	read/write	0000010
WD_CTRL	CHECKSUM	WD_STM_EN_0	WD_WIN	WD_EN_WK_BUS	reserved	WD_TIMER_2	WD_TIMER_1	WD_TIMER_0	read/write	0000011
BUS_CTRL_0	reserved	reserved	reserved	reserved	reserved	CAN_2	CAN_1	CAN_0	read/write	0000100
WK_CTRL_0	reserved	TIMER_WK_EN	reserved	reserved	reserved	WD_STM_EN_1	reserved	reserved	read/write	0000110
WK_CTRL_1	INT_GLOBAL	reserved	WK_MEAS	reserved	reserved	reserved	reserved	WK_EN	read/write	0000111
WK_PUPD_CTRL	GPIO_WK_PUPD_1	GPIO_WK_PUPD_0	reserved	reserved	reserved	reserved	WK_PUPD_1	WK_PUPD_0	read/write	0001000
BUS_CTRL_3	reserved	reserved	reserved	CAN_FLASH	reserved	reserved	reserved	reserved	read/write	0001011
TIMER_CTRL	reserved	TIMER_ON_2	TIMER_ON_1	TIMER_ON_0	TIMER_PER_3	TIMER_PER_2	TIMER_PER_1	TIMER_PER_0	read/write	0001100
HW_CTRL_1	RSTN_HYS	reserved	TSD2_DEL	RSTN_DEL	CFG_LOCK_0	reserved	reserved	reserved	read/write	0001110
HW_CTRL_2	2MHZ_FREQ_2	2MHZ_FREQ_1	2MHz_FREQ_0	I_PEAK_TH	SS_MOD_FR_1	SS_MOD_FR_0	reserved	CFG_LOCK_1	read/write	0001111
GPIO_CTRL	reserved	reserved	reserved	reserved	reserved	GPIO_2	GPIO_1	GPIO_0	read/write	0010111
PWM_CTRL	PWM_DC_7	PWM_DC_6	PWM_DC_5	PWM_DC_4	PWM_DC_3	PWM_DC_2	PWM_DC_1	PWM_DC_0	read/write	0011000
PWM_FREQ_CTRL	reserved	reserved	reserved	reserved	reserved	reserved	PWM_FREQ_1	PWM_FREQ_0	read/write	0011100
HW_CTRL_3	reserved	reserved	reserved	reserved	reserved	TSD_THR	ICC1_LIM_ADJ_1	ICC1_LIM_ADJ_0	read/write	0011101
SYS_STAT_CTRL_0	SYS_STAT_7	SYS_STAT_6	SYS_STAT_5	SYS_STAT_4	SYS_STAT_3	SYS_STAT_2	SYS_STAT_1	SYS_STAT_0	read/write	0011110
SYS_STAT_CTRL_1	SYS_STAT_15	SYS_STAT_14	SYS_STAT_13	SYS_STAT_12	SYS_STAT_11	SYS_STAT_10	SYS_STAT_9	SYS_STAT_8	read/write	0011111
SELECTIVE WAKE REGISTERS										
SWK_CTRL	OSC_CAL	TRIM_EN_1	TRIM_EN_0	CANTO_MASK	reserved	reserved	reserved	CFG_VAL	read/write	0100000
SWK_BTL0_CTRL	TBIT_7	TBIT_6	TBIT_5	TBIT_4	TBIT_3	TBIT_2	TBIT_1	TBIT_0	read/write	0100001
SWK_BTL1_CTRL	reserved	reserved	SP_5	SP_4	SP_3	SP_2	SP_1	SP_0	read/write	0100010
SWK_ID3_CTRL	ID28	ID27	ID26	ID25	ID24	ID23	ID22	ID21	read/write	0100011
SWK_ID2_CTRL	ID20	ID19	ID18	ID17	ID16	ID15	ID14	ID13	read/write	0100100
SWK_ID1_CTRL	ID12	ID11	ID10	ID9	ID8	ID7	ID6	ID5	read/write	0100101
SWK_ID0_CTRL	reserved	ID4	ID3	ID2	ID1	ID0	RTR	IDE	read/write	0100110
SWK_MASK_ID3_CTRL	MASK_ID28	MASK_ID27	MASK_ID26	MASK_ID25	MASK_ID24	MASK_ID23	MASK_ID22	MASK_ID21	read/write	0100111
SWK_MASK_ID2_CTRL	MASK_ID20	MASK_ID19	MASK_ID18	MASK_ID17	MASK_ID16	MASK_ID15	MASK_ID14	MASK_ID13	read/write	0101000
SWK_MASK_ID1_CTRL	MASK_ID12	MASK_ID11	MASK_ID10	MASK_ID9	MASK_ID8	MASK_ID7	MASK_ID6	MASK_ID5	read/write	0101001
SWK_MASK_ID0_CTRL	reserved	MASK_ID4	MASK_ID3	MASK_ID2	MASK_ID1	MASK_ID0	reserved	reserved	read/write	0101010
SWK_DLC_CTRL	reserved	reserved	reserved	reserved	DLC_3	DLC_2	DLC_1	DLC_0	read/write	0101011
SWK_DATA7_CTRL	DATA7_7	DATA7_6	DATA7_5	DATA7_4	DATA7_3	DATA7_2	DATA7_1	DATA7_0	read/write	0101100
SWK_DATA6_CTRL	DATA6_7	DATA6_6	DATA6_5	DATA6_4	DATA6_3	DATA6_2	DATA6_1	DATA6_0	read/write	0101101
SWK_DATA5_CTRL	DATA5_7	DATA5_6	DATA5_5	DATA5_4	DATA5_3	DATA5_2	DATA5_1	DATA5_0	read/write	0101110
SWK_DATA4_CTRL	DATA4_7	DATA4_6	DATA4_5	DATA4_4	DATA4_3	DATA4_2	DATA4_1	DATA4_0	read/write	0101111
SWK_DATA3_CTRL	DATA3_7	DATA3_6	DATA3_5	DATA3_4	DATA3_3	DATA3_2	DATA3_1	DATA3_0	read/write	0110000
SWK_DATA2_CTRL	DATA2_7	DATA2_6	DATA2_5	DATA2_4	DATA2_3	DATA2_2	DATA2_1	DATA2_0	read/write	0110001
SWK_DATA1_CTRL	DATA1_7	DATA1_6	DATA1_5	DATA1_4	DATA1_3	DATA1_2	DATA1_1	DATA1_0	read/write	0110010
SWK_DATA0_CTRL	DATA0_7	DATA0_6	DATA0_5	DATA0_4	DATA0_3	DATA0_2	DATA0_1	DATA0_0	read/write	0110011
SWK_CAN_FD_CTRL	reserved	reserved	DIS_ERR_CNT	RX_FILT_BYP	FD_FILTER_2	FD_FILTER_1	FD_FILTER_0	CAN_FD_EN	read/write	0110100
SELECTIVE WAKE TRIM &CONFIGURATIONS REGISTERS										
SWK_OSC_TRIM_CTRL	TRIM_OSC_7	TRIM_OSC_6	TRIM_OSC_5	TRIM_OSC_4	TRIM_OSC_3	TRIM_OSC_2	TRIM_OSC_1	TRIM_OSC_0	read/write	0111000
SWK_OPT_CTRL	RX_WK_SEL	reserved	reserved	TRIM_OSC_12	TRIM_OSC_11	TRIM_OSC_10	TRIM_OSC_9	TRIM_OSC_8	read/write	0111001
SWK_OSC_CAL_H_STAT	OSC_CAL_H_7	OSC_CAL_H_6	OSC_CAL_H_5	OSC_CAL_H_4	OSC_CAL_H_3	OSC_CAL_H_2	OSC_CAL_H_1	OSC_CAL_H_0	read	0111010
SWK_OSC_CAL_L_STAT	OSC_CAL_L_7	OSC_CAL_L_6	OSC_CAL_L_5	OSC_CAL_L_4	OSC_CAL_L_3	OSC_CAL_L_2	OSC_CAL_L_1	OSC_CAL_L_0	read	0111011
SWK_CDR_CTRL1	reserved	reserved	reserved	reserved	SELFILT_1	SELFILT_0	reserved	CDR_EN	read/write	0111100
SWK_CDR_CTRL2	reserved	reserved	reserved	reserved	reserved	reserved	SEL_OSC_CLK_1	SEL_OSC_CLK_0	read/write	0111101
SWK_CDR_LIMIT_HIGH_CTRL	CDR_LIM_H_7	CDR_LIM_H_6	CDR_LIM_H_5	CDR_LIM_H_4	CDR_LIM_H_3	CDR_LIM_H_2	CDR_LIM_H_1	CDR_LIM_H_0	read/write	0111110
SWK_CDR_LIMIT_LOW_CTRL	CDR_LIM_L_7	CDR_LIM_L_6	CDR_LIM_L_5	CDR_LIM_L_4	CDR_LIM_L_3	CDR_LIM_L_2	CDR_LIM_L_1	CDR_LIM_L_0	read/write	0111111
STATUS REGISTERS										
SUP_STAT_1	reserved	VS_UV	VS_OV	reserved	reserved	reserved	VCC1_OV	VCC1_WARN	read/clear	1000000
SUP_STAT_0	POR	reserved	reserved	VCC2_OT	VCC2_UV	VCC1_SC	reserved	VCC1_UV	read/clear	1000001
THERM_STAT	reserved	reserved	reserved	reserved	TSD2_SAFE	TSD2	TSD1	TPW	read/clear	1000010
DEV_STAT	DEV_STAT_1	DEV_STAT_0	reserved	reserved	WD_FAIL_1	WD_FAIL_0	SPI_FAIL	FAILURE	read/clear	1000011
BUS_STAT	reserved	reserved	reserved	CANTO	SYSERR	CAN_FAIL_1	CAN_FAIL_0	VCAN_UV	read/clear	1000100
WK_STAT_0	reserved	reserved	CAN_WU	TIMER_WU	reserved	reserved	reserved	WK_WU	read/clear	1000110
WK_STAT_1	reserved	reserved	reserved	GPIO_WK_WU	reserved	reserved	reserved	reserved	read/clear	1000111
WK_LVL_STAT	SBC_DEV_LVL	CFG0_STATE	reserved	GPIO_LVL	reserved	reserved	reserved	WK_LVL	read	1001000
GPIO_OC_STAT	reserved	GPIO_HS_LS_OC	reserved	reserved	reserved	reserved	reserved	reserved	read/clear	1010100
GPIO_OL_STAT	reserved	GPIO_HS_OL	reserved	reserved	reserved	reserved	reserved	reserved	read/clear	1010101
SELECTIVE WAKE STATUS REGISTERS										
SWK_STAT	reserved	SYNC	reserved	reserved	CANSIL	SWK_SET	WUP	WUF	read	1110000
SWK_ECNT_STAT	reserved	reserved	ECNT_5	ECNT_4	ECNT_3	ECNT_2	ECNT_1	ECNT_0	read	1110001
SWK_CDR_STAT1	N_AVG_11	N_AVG_10	N_AVG_9	N_AVG_8	N_AVG_7	N_AVG_6	N_AVG_5	N_AVG_4	read	1110010
SWK_CDR_STAT2	N_AVG_3	N_AVG_2	N_AVG_1	N_AVG_0	reserved	reserved	reserved	reserved	read	1110011
FAMILY AND PRODUCT REGISTERS										
FAM_PROD_STAT	FAM_3	FAM_2	FAM_1	FAM_0	PROD_3	PROD_2	PROD_1	PROD_0	read	1111110

changes vs. Last revision 0.70 vs 0.50 — Partial Networking — Locked Bits (CFG_LOCK_0) — Locked Bits (CFG_LOCK_1)

Figure 48 Detailed TLE9471-3ES SPI Bit Mapping

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

13.5 SPI Control Registers

READ/WRITE Operation (see also Chapter 13.3):

- The 'POR / Soft Reset Value' defines the register content after POR or SBC Reset.
- The 'Restart Value' defines the register content after SBC Restart, where 'x' means the bit is unchanged.
- One 16-bit SPI command consist of two bytes:
  - the 7-bit address and one additional bit for the register access mode and
  - following the data byte
  The numbering of following bit definitions refers to the data byte and correspond to the bits D0...D7 and to the SPI bits 8...15. In case of 32-bit SPI commands, the databytes from the next valid address are accessed (see also Figure 46)
- There are four different bit types:
  - 'r' = READ: read only bits (or reserved bits)
  - 'rw' = READ/WRITE: readable and writable bits
  - 'rwh' = READ/WRITE/Hardware: readable/writable bits, which can also be modified by the SBC hardware
  - 'rwl' = READ/WRITE/LOCKED: readable/writable bits, which are locked and cannot be modified anymore once the bit CFG_LOCK_0 in the HW_CTRL_1 or CFG_LOCK_1 in the HW_CTRL_2 register are set. The locking mechanism will remain active for all conditions (incl. Soft Reset) unless the bit CFG_LOCK_0 (for CP_EN or GPIO only) is cleared again;
    for bits relating to CFG_LOCK_1 the locking mechanism will remain active until the device is powered down (VS < $V_{POR,f}$) and can only be changed at the next device power-up.
    After a soft reset command: If the respective lock bit is not set then the POR values will be resumed; if the respective lock bit is set then the respective configurations stay unchanged, i.e. the soft reset has no effect on those configurations.
- Reserved bits are marked as "Reserved" and always read as "0". The respective bits shall also be programmed as "0".
- Reading a register is done byte wise by setting the SPI bit 7 to "0" (= Read Only).
- Writing to a register is done byte wise by setting the SPI bit 7 to "1".
- SPI control bits are in general not cleared or changed automatically. This must be done by the microcontroller via SPI programming. Exceptions to this behavior are stated at the respective register description and the respective bit type is marked with a 'h' meaning that the SBC is able to change the register content.

The registers are addressed wordwise.

Table 35 Register Overview: SPI Control Register

Register Short Name	Register Long Name	Offset Address	Reset Value
General Control Registers			
M_S_CTRL	Mode- and Supply Control	000 0001_B	Page 131
HW_CTRL_0	Hardware Control 0	000 0010_B	Page 132
WD_CTRL	Watchdog Control	000 0011_B	Page 133
BUS_CTRL_0	Bus Control 0	000 0100_B	Page 134
WK_CTRL_0	Internal Wake Input Control	000 0110_B	Page 134

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Table 35 Register Overview: SPI Control Register (cont'd)

Register Short Name	Register Long Name	Offset Address	Reset Value
WK_CTRL_1	External Wake Source Control	000 0111$_B$	Page 135
WK_PUPD_CTRL	Wake Input Level Control	000 1000$_B$	Page 136
BUS_CTRL_3	Bus Control 3	000 1011$_B$	Page 136
TIMER_CTRL	Timer Control and Selection	000 1100$_B$	Page 137
HW_CTRL_1	Hardware Control 1	000 1110$_B$	Page 138
HW_CTRL_2	Hardware Control 2	000 1111$_B$	Page 139
GPIO_CTRL	GPIO Configuration Control	001 0111$_B$	Page 140
PWM_CTRL	PWM Configuration Control	001 1000$_B$	Page 140
PWM_FREQ_CTRL	PWM Frequency Configuration Control	001 1100$_B$	Page 141
HW_CTRL_3	Hardware Control 3	001 1101$_B$	Page 141
SYS_STATUS_CTRL_0	System Status Control Low Byte	001 1110$_B$	Page 142
SYS_STATUS_CTRL_1	System Status Control High Byte	001 1111$_B$	Page 142
Selective Wake Control Registers			
SWK_CTRL	CAN Selective Wake Control	010 0000$_B$	Page 143
SWK_BTL0_CTRL	SWK Bit Timing Logic Control1	010 0001$_B$	Page 144
SWK_BTL1_CTRL	SWK Bit Timing Logic Control2	010 0010$_B$	Page 144
SWK_ID3_CTRL	SWK WUF Identifier bits 28...21	010 0011$_B$	Page 144
SWK_ID2_CTRL	SWK WUF Identifier bits 20...13	010 0100$_B$	Page 145
SWK_ID1_CTRL	SWK WUF Identifier bits 12...5	010 0101$_B$	Page 145
SWK_ID0_CTRL	SWK WUF Identifier bits 4...0	010 0110$_B$	Page 145
SWK_MASK_ID3_CTRL	SWK WUF Identifier Mask bits 28...21	010 0111$_B$	Page 146
SWK_MASK_ID2_CTRL	SWK WUF Identifier Mask bits 20..13	010 1000$_B$	Page 146
SWK_MASK_ID1_CTRL	SWK WUF Identifier Mask bits 12...5	010 1001$_B$	Page 146
SWK_MASK_ID0_CTRL	SWK WUF Identifier Mask bits 4...0	010 1010$_B$	Page 147
SWK_DLC_CTRL	SWK Frame Data Length Code Control	010 1011$_B$	Page 147
SWK_DATA7_CTRL	SWK Data7 Register	010 1100$_B$	Page 148
SWK_DATA6_CTRL	SWK Data6 Register	010 1101$_B$	Page 148
SWK_DATA5_CTRL	SWK Data5 Register	010 1111$_B$	Page 148
SWK_DATA4_CTRL	SWK Data4 Register	010 1111$_B$	Page 148
SWK_DATA3_CTRL	SWK Data3 Register	011 0000$_B$	Page 149
SWK_DATA2_CTRL	SWK Data2 Register	011 0001$_B$	Page 149
SWK_DATA1_CTRL	SWK Data1 Register	011 0010$_B$	Page 149
SWK_DATA0_CTRL	SWK Data0 Register	011 0011$_B$	Page 149
SWK_CAN_FD_CTRL	CAN FD Configuration Control Register	011 0100$_B$	Page 150
SWK_OSC_TRIM_CTRL	SWK Oscillator Trimming Register	011 1000$_B$	Page 150
SWK_OPT_CTRL	Selective Wake Options Register	011 1001$_B$	Page 151
SWK_OSC_CAL_H_STAT	SWK Oscillator Calibration High Register	011 1010$_B$	Page 151
SWK_OSC_CAL_L_STAT	SWK Oscillator Calibration Low Register	011 1011$_B$	Page 152

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Table 35 Register Overview: SPI Control Register (cont'd)

Register Short Name	Register Long Name	Offset Address	Reset Value
SWK_CDR_CTRL1	CDR Control 1 Register	011 1100$_B$	Page 152
SWK_CDR_CTRL2	CDR Control 2 Register	011 1101$_B$	Page 153
SWK_CDR_LIMIT_HIGH_CTRL	SWK CDR Upper Limit Control	011 1110$_B$	Page 154
SWK_CDR_LIMIT_LOW_CTRL	SWK CDR Lower Limit Control	011 1111$_B$	Page 154

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

13.5.1 General Control Registers

M_S_CTRL
Mode- and Supply Control (Address 000 0001$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0000 00xx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0069]MODE		[Row:F=SPI_0070]Reserved	[Row:F=SPI_0071]VCC2_ON		[Row:F=SPI_0072]VCC1_OV_RST	[Row:F=SPI_0073]VCC1_RT	
rwh		r	rwh		rwh	rw	

Field	Bits	Type	Description
MODE	7:6	rwh	**SBC Mode Control** 00_B , SBC Normal Mode 01_B , SBC Sleep Mode 10_B , SBC Stop Mode 11_B , SBC Reset: Soft Reset is executed (configuration of RSTN triggering in bit SOFT_RESET_RST)
Reserved	5	r	**Reserved, always reads as 0**
VCC2_ON	4:3	rwh	**VCC2 Mode Control** 00_B , VCC2 off 01_B , VCC2 on in Normal Mode 10_B , VCC2 on in Normal and Stop Mode 11_B , VCC2 always on (except in SBC Init - if not in SBC Development Mode, SBC Restart and Fail-Safe Mode)
VCC1_OV_RST	2	rwh	**VCC1 Over Voltage leading to Restart / Fail-Safe Mode enable** 0_B , VCC1_ OV is set in case of VCC1_OV; no SBC Restart or Fail-Safe is entered for VCC1_OV 1_B , VCC1_ OV is set in case of VCC1_OV; depending on the device configuration SBC Restart or SBC Fail-Safe Mode is entered (see Chapter 5.1.1);
VCC1_RT	1:0	rw	**VCC1 Reset Threshold Control** 00_B , Vrt1 selected (highest threshold) 01_B , Vrt2 selected 10_B , Vrt3 selected 11_B , Vrt4 selected

Notes

1. *It is not possible to change from Stop to Sleep Mode via SPI Command. See also the State Machine Chapter*
2. *In a transition from SBC Stop to SBC Normal Mode a change of the bits [4:0] is ignored and the SPI_FAIL bit is set. The transition to SBC Normal Mode is executed.*
3. *After entering SBC Restart Mode, the MODE bits will be automatically set to SBC Normal Mode. The VCC2_ON bits will be automatically set to OFF after entering SBC Restart Mode and after OT.*
4. *The SPI output will always show the previously written state with a Write Command (what has been programmed before)*

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

5. *When in SBC Development Mode the POR/Soft Reset value of VCC2_ON = '11', i.e. VCC2 is on in SBC Init Mode but will be switched off with a Soft Reset command*

HW_CTRL_0
Hardware Control 0 (Address 000 0010$_B$)
POR / Soft Reset Value: 0y00 0y00$_B$; Restart Value: 0x00 0x0x$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0078]Reserved	[Row:F=SPI_0079]SOFT_RESET_RST	[Row:F=SPI_0080]FO_ON	[Row:F=SPI_0081]Reserved		[Row:F=SPI_0082]CP_EN	[Row:F=SPI_0083]Reserved	[Row:F=SPI_0084]CFG1
r	rwl	rwh	r		rwl	r	rw

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
SOFT_RESET_RST	6	rwl	Soft Reset Configuration 0_B , RST will be triggered (pulled low) during a Soft Reset 1_B , no RST trigger during a Soft Reset
FO_ON	5	rwh	Failure Output Activation 0_B , FO not activated by software, FO will be activated by specified failures (see Chapter 11.1.1) 1_B , FO activated by software (via SPI), only if configured as FO
Reserved	4:3	r	Reserved, always reads as 0
CP_EN	2	rwl	Charge Pump Output Enable 0_B , Charge Pump is OFF 1_B , Charge Pump Output is enabled (see Chapter 5)
Reserved	1	r	Reserved, always reads as 0
CFG1	0	rw	Configuration Select 1 (see also Table 5) 0_B , Depending on hardware configuration, SBC Restart or Fail-Safe Mode is reached after the 2. watchdog trigger failure (=default) - Config 3/4 1_B , Depending on hardware configuration, SBC Restart or Fail-Safe Mode is reached after the 1. watchdog trigger failure - Config 1/2

Notes

1. *Clearing the FO_ON bit will not disable the FO outputs in case a failure occurred which triggered the FO outputs. In this case the FO outputs have to be disabled by clearing the FAILURE bit.*
   If the FO_ON bit is set by the software then it will be cleared by the SBC after SBC Restart Mode was entered and the FO outputs will be disabled (if no failures occurred which triggered the fail outputs) . See also Chapter 11 for FO activation and deactivation.
2. *In case the CFG_LOCK_1 bit is set, then the soft reset value for SOFT_RESET_RST will stay unchanged, i.e. 'x'; the same applies if CFG_LOCK_0 is set: then the soft reset value of the bit CP_EN will stay unchanged, i.e. 'x'. Therefore, the respective soft reset values are marked as 'y'.*

Confidential for ALRT Only

WD_CTRL
Watchdog Control (Address 000 0011$_B$)
POR / Soft Reset Value: 0001 0100$_B$; Restart Value: x0xx 0100$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0087]CHECKSUM	[Row:F=SPI_0088]WD_STM_EN_0	[Row:F=SPI_0089]WD_WIN	[Row:F=SPI_0090]WD_EN_WK_BUS	[Row:F=SPI_0091]Reserved	[Row:F=SPI_0092]WD_TIMER		
rw	rwh	rw	rw	r	rwh		

Field	Bits	Type	Description
CHECKSUM	7	rw	**Watchdog Setting Check Sum Bit** The sum of bits 7:0 needs to have even parity (see Chapter 12.2.3) 0_B , Counts as 0 for checksum calculation 1_B , Counts as 1 for checksum calculation
WD_STM_EN_0	6	rwh	**Watchdog Deactivation during Stop Mode, bit 0 (Chapter 12.2.4)** 0_B , Watchdog is active in Stop Mode 1_B , Watchdog is deactivated in Stop Mode
WD_WIN	5	rw	**Watchdog Type Selection** 0_B , Watchdog works as a Time-Out watchdog 1_B , Watchdog works as a Window watchdog
WD_EN_WK_BUS	4	rw	**Watchdog Enable after Bus (CAN) Wake in SBC Stop Mode** 0_B , Watchdog will not start after a CAN wake 1_B , Watchdog starts with a long open window after CAN Wake
Reserved	3	r	**Reserved, always reads as 0**
WD_TIMER	2:0	rwh	**Watchdog Timer Period** 000_B , 10ms 001_B , 20ms 010_B , 50ms 011_B , 100ms 100_B , 200ms 101_B , 500ms 110_B , 1000ms 111_B , 10000ms

Notes

1. *See also Chapter 12.2.4 for more information on disabling the watchdog in SBC Stop Mode.*
2. *See Chapter 12.2.5 for more information on the effect of the bit WD_EN_WK_BUS.*
3. *See Chapter 12.2.3 for calculation of checksum.*

Confidential for ALRT only

BUS_CTRL_0
Bus Control 0 (Address 000 0100_B)
POR / Soft Reset Value: 0000 0000_B; Restart Value: 0000 $0yyy_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0093]Reserved					[Row:F=SPI_0094]CAN		
r					rwh		

Field	Bits	Type	Description
Reserved	7:3	r	Reserved, always reads as 0
CAN	2:0	rwh	HS-CAN Module Modes (CAN_2 is rw type) 000_B , CAN OFF 001_B , CAN is wake capable (no SWK) 010_B , CAN Receive Only Mode (no SWK) 011_B , CAN Normal Mode (no SWK) 100_B , CAN OFF 101_B , CAN is wake capable with SWK 110_B , CAN Receive Only Mode with SWK 111_B , CAN Normal Mode with SWK

Notes

1. *The reset values for the CAN transceivers are marked with 'y' because they will vary depending on the cause of change - see below.*
2. *see Figure 24 for detailed state changes of CAN Transceiver for different SBC modes.*
3. *The bit CAN_2 is not modified by the SBC but can only be changed by the user. Therefore, the bit type is 'rw' compared to bits CAN_0 and CAN_1.*
4. *In case SYSERR = 0 and the CAN transceiver is configured to 'x11' while going to SBC Sleep Mode, it will be automatically set to wake capable ('x01'). The SPI bits will be changed to wake capable. If configured to 'x10' and SBC Sleep Mode is entered, then the transceiver is set to wake capable, while it will stay in Receive Only Mode when it had been configured to 'x10' when going to SBC Stop Mode. If it had been configured to wake capable or OFF then the mode will remain unchanged.The Receive Only Mode has to be selected by the user before entering SBC Stop Mode. Please refer to Chapter 5.6.4 for detailed information on the Selective Wake mode changes.*
5. *Failure Handling Mechanism: When the device enters Fail-Safe Mode due to a failure (TSD2, WD-Failure,...), then BUS_CTRL_0 is modified by the SBC to '0000 0x01' to ensure that the device can be woken again. See also the description in Chapter 5.6.4.5 and for WK_CTRL_1 for other wake sources when entering SBC Fail-Safe Mode.*
6. *When in SBC Development Mode the POR/Soft Reset value of CAN = '011'*

WK_CTRL_0
Internal Wake Input Control (Address 000 0110_B)
POR / Soft Reset Value: 0000 0000_B; Restart Value: 0x00 0000_B

7	6	5	4	3	2	1	0
[Row:F=SPI_0102]Reserved	[Row:F=SPI_0103]TIMER_WK_EN	[Row:F=SPI_0104]Reserved			[Row:F=SPI_0105]WD_STM_EN_1	[Row:F=SPI_0106]Reserved	
r	rw	r			rwh	r	

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
TIMER_WK_EN	6	rw	Timer Wake Source Control (for cyclic wake) 0_B , Timer wake disabled 1_B , Timer is enabled as a wake source
Reserved	5:3	r	Reserved, always reads as 0
WD_STM_EN_1	2	rwh	Watchdog Deactivation during Stop Mode, bit 1 (Chapter 12.2.4) 0_B , Watchdog is active in Stop Mode 1_B , Watchdog is deactivated in Stop Mode
Reserved	1:0	r	Reserved, always reads as 0

Note: WD_STM_EN_1 will also be cleared when changing from SBC Stop to Normal Mode

WK_CTRL_1
External Wake Source Control (Address 000 0111$_B$)
POR / Soft Reset Value: 0000 0001$_B$; Restart Value: x0x0 000x$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0107]INT_GLOBAL	[Row:F=SPI_0108]Reserved	[Row:F=SPI_0109]WK_MEAS	[Row:F=SPI_0112]Reserved				[Row:F=SPI_0113]WK_EN
rw	r	rw	r				rw

Field	Bits	Type	Description
INT_GLOBAL	7	rw	Global Interrupt Configuration (see also Chapter 10.1) 0_B , Only wake sources trigger INTN (default) 1_B , All status information register bits will trigger INTN (including all wake sources)
Reserved	6	r	Reserved, always reads as 0
WK_MEAS	5	rw	Wake / Voltage Sensing Selection (see also Chapter 9.2.4) 0_B , Wake functionality enabled for WK 1_B , Voltage sensing functionality enabled, no wake-up events are generated
Reserved	4:1	r	Reserved, always reads as 0
WK_EN	0	rw	WK Wake Source Control 0_B , WK wake disabled 1_B , WK is enabled as a wake source

Notes

1. *WK_MEAS is by default configured for standard WK functionality (static wake on WK). If WK_MEAS is set and FO is not activated then the bits WK_EN and GPIO_CTRL are ignored. If FO is activated then WK_MEAS cannot be set to '1 and SPI_Fail is set. If the bit is set to '1' then the measurement function is enabled during Normal Mode & the bits WK_EN are ignored. The bits WK_LVL and GPIO_LVL bits are not updated and are reset.*

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

2. *The wake source CAN is selected in the register BUS_CTRL_0 by setting the respective bits to 'wake capable'*
3. *Failure Handling Mechanism: When the device enters SBC Fail-Safe Mode due to a failure (TSD2, WD-Failure,...) and WK_MEAS = '0', then WK_CTRL_1 is modified by the SBC to 'x0x0 0001' in order to ensure that the device can be woken again. In case WK_MEAS is '1' then WK will not be available as an automatic wake source in SBC Fail-Safe Mode.*

WK_PUPD_CTRL
Wake Input Level Control (Address 000 1000$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xx00 00xx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0117]GPIO_WK_PUPD		[Row:F=SPI_0118]Reserved				[Row:F=SPI_0119]WK_PUPD	
rw		r				rw	

Field	Bits	Type	Description
GPIO_WK_PUPD	7:6	rw	**GPIO WK Pull-Up / Pull-Down Configuration (only if GPIO configured as WK)** 00_B , No pull-up / pull-down selected 01_B , Pull-down resistor selected 10_B , Pull-up resistor selected 11_B , Automatic switching to pull-up or pull-down
Reserved	5:2	r	**Reserved, always reads as 0**
WK_PUPD	1:0	rw	**WK Pull-Up / Pull-Down Configuration** 00_B , No pull-up / pull-down selected 01_B , Pull-down resistor selected 10_B , Pull-up resistor selected 11_B , Automatic switching to pull-up or pull-down

BUS_CTRL_3
Bus Control 3 (Address 000 1011$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 000x 0000$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0120]Reserved			[Row:F=SPI_0121]CAN_Flash	[Row:F=SPI_0122]Reserved			
r			rw	r			

Field	Bits	Type	Description
Reserved	7:5	r	**Reserved, always reads as 0**
CAN_Flash	4	rw	**HS-CAN Flash Mode Activation** 0_B , Flash Mode disabled: CAN communication up to 5MBaud 1_B , Flash Mode enabled: CAN communication for higher than 5MBaud (higher emission on CAN bus - no slew rate control)
Reserved	3:0	r	**Reserved, always reads as 0**

Confidential for ALRT only

Note: The electrical parameters for the CAN FD communication are ensured up to 5MBaud for the default setting (CAN_Flash is cleared). In case higher communication rates are required then CAN_Flash can be set.

TIMER_CTRL
Timer Control and Selection (Address 000 1100$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0000 0000$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0123]Reserved	[Row:F=SPI_0124]TIMER_ON			[Row:F=SPI_0125]TIMER_PER			
r	rwh			rwh			

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
TIMER_ON	6:4	rwh	**Timer On-Time Configuration** 000_B , OFF / Low (timer not running, HSx output is low) 001_B , 0.1ms on-time 010_B , 0.3ms on-time 011_B , 1.0ms on-time 100_B , 10ms on-time 101_B , 20ms on-time 110_B , OFF / HIGH (timer not running, HSx output is high) 111_B , reserved
TIMER_PER	3:0	rwh	**Timer Period Configuration** 0000_B, 10ms 0001_B, 20ms 0010_B, 50ms 0011_B, 100ms 0100_B, 200ms 0101_B, 500ms 0110_B, 1s 0111_B, 2s 1000_B, 5s 1001_B, 10s 1010_B, 20s 1011_B, 50s 1100_B, 100s 1101_B, 200s 1110_B, 500s 1111_B, 1000s

Notes

1. *The timer must be first assigned and is then automatically activated as soon as the on-time is configured.*

Confidential for ALRT Only

2. *If cyclic sense is selected and the GPIO HS switch is cleared during SBC Restart Mode then also the timer settings (period and on-time) are cleared to avoid incorrect switch detection. However, the timer settings are not cleared in case of failure not leading to SBC Restart Mode. This must be considered by the application.*
3. *in case the timer is set as wake sources and cyclic sense is running, then both cyclic sense and cyclic wake will be active at the same time.*
4. *A new timer configuration will become active immediately, i.e. as soon as CSN goes high.*

HW_CTRL_1
Hardware Control 1 (Address 000 1110$_B$)
POR / Soft Reset Value: y0yy y000$_B$; Restart Value: x0xx x000$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0130]RSTN_HYS	[Row:F=SPI_0131]Reserved	[Row:F=SPI_0132]TSD2_DEL	[Row:F=SPI_0133]RSTN_DEL	[Row:F=SPI_0134]CFG_LOCK_0	[Row:F=SPI_0135]Reserved		
rwl	r	rwl	rwl	rw	r		

Field	Bits	Type	Description
RSTN_HYS	7	rwl	VCC1 Undervoltage Reset Hysteresis Selection (see also Chapter 12.5.1 for more information) 0_B , default hysteresis applies as specified in the electrical characteristics table 1_B , the highest rising threshold (Vrt1,r) is always used for the release of the undervoltage reset
Reserved	6	r	Reserved, always reads as 0
TSD2_DEL	5	rwl	TSD2 Minimum Waiting Time Selection 0_B , Minimum waiting time until TSD2 is released again is always 1s 1_B , Minimum waiting time until TSD2 is released again is 1s, after >16 consecutive TSD2 events, it will be extended to x64
RSTN_DEL	4	rwl	Reset Delay Time Selection 0_B , The extended reset delay time t_{RD1} is selected (default) 1_B , The reduced t_{RD2} reset delay time is selected
CFG_LOCK_0	3	rw	Configuration Lock Bit - Level 0 0_B , CP_EN and GPIO can be modified 1_B , CP_EN and GPIO is locked and cannot be modified
Reserved	2:0	r	Reserved, always reads as 0

Notes

1. *See also Chapter 12.5 for selection of VCC1 undervoltage hysteresis*
2. *See also Chapter 12.8 for minimum waiting time in case of an TSD2 event*
3. *The bit CFG_LOCK_0 is used to prevent an unintentional modification of the charge pump activation bit CP_EN and the GPIO configuration bits GPIO. In case the charge pump output state or the GPIO configuration must be changed then it is necessary to clear CFG_LOCK_0. The other lockable bits are controlled by the lock*

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

bit CFG_LOCK_1. In case either lock bit is set then the respective locked bits cannot be changed by a soft reset. Therefore, the respective soft reset values are marked as 'y'.

4. *In case CFG_LOCK_1 bit are set, then the respective soft reset value will be like the Restart value.*

HW_CTRL_2
Hardware Control 2 (Address 000 1111$_B$)
POR Value: 0100 0000$_B$; Restart Value/Soft Reset Value: xxxx xxyx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0139]2MHZ_FREQ			[Row:F=SPI_0140]I_PEAK_TH	[Row:F=SPI_0141]SS_MOD_FR		[Row:F=SPI_0143]DCDC_OFFSET_EN[Row:F=SPI_0131]R	[Row:F=SPI_0144]CFG_LOCK_1
rwl			rwl	rwl		rwrr	rwl

Field	Bits	Type	Description
2MHZ_FREQ	7:5	rwl	**SMPS and Charge Pump Switching Frequency Setting** 000_B , 1.8MHz 001_B , 2.0MHz 010_B , 2.2MHz (default value) 011_B , 2.4MHz
I_PEAK_TH	4	rwl	**VCC1 Active Peak Threshold Selection** 0_B , low VCC1 active peak threshold selected (ICC1,peak_1) 1_B , high VCC1 active peak threshold selected (ICC1,peak_2).
SS_MOD_FR	3:2	rwl	**Spread Spectrum Modulation Frequency Setting of integrated 2MHz oscillator for charge pump and SMPS regulator** 00_B , Spread Spectrum disabled 01_B , 15.625kHz Modulation Frequency 10_B , 31.250kHz Modulation Frequency 11_B , 62.500kHz Modulation Frequency
Reserved	1	r	**Reserved, always reads as 0**
CFG_LOCK_1	0	rwl	**Configuration Lock Bit - Level 1** 0_B , Bits with bit type 'rwl' (except CP_EN and GPIO) can be modified 1_B , Bits with bit type 'rwl' (except CP_EN and GPIO) are locked and cannot be modified anymore until next device power-up.

Notes

1. *The configuration locking becomes effective after CSN changes from LOW to HIGH once the CFG_LOCK_1 bit was set. The locking is active until the next device power-up (VS < $V_{POR,f}$), i.e. also CFG_LOCK_1 is locked in this case. The CFG_LOCK_1 will stay unchanged by a soft reset.*
2. *In case the CFG_LOCK_1 bit is set, then the soft reset value will be like the Restart value.*

Confidential for ALRT Only

GPIO_CTRL
GPIO Configuration Control (Address 001 0111_B)
POR Value: 0000 0000_B; Restart Value/Soft Reset Value: 0000 $0yyy_B$

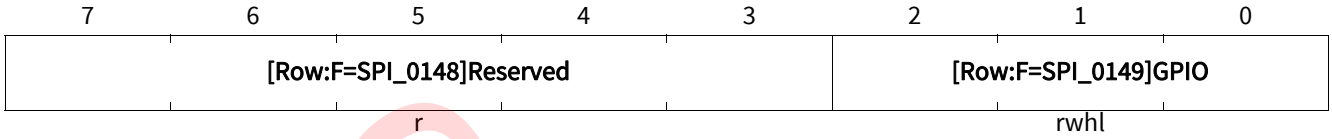

Field	Bits	Type	Description
Reserved	7:3	r	Reserved, always reads as 0
GPIO	2:0	rwhl	GPIO Configuration 000_B , FO selected (default) 001_B , FO selected 010_B , FO selected 011_B , High-Side controlled by TIMER (cyclic sense) 100_B , OFF 101_B , Wake input enabled (16us static filter) 110_B , Low-Side Switch controlled by PWM 111_B , High-Side Switch controlled by PWM

Notes

1. *The Restart and Soft Reset Value depends on the respective GPIO configuration. Therefore the bit type is also 'rwhl' and the restart value is 'y'. See also Table 30 in Chapter 11.1.2 for more information on the GPIO behavior for the different SBC modes and Restart behavior.*
2. *In case the CFG_LOCK_0 bit is set, then the soft reset value will be like the Restart value.*
3. *If GPIO is configured as a wake input, then it will be a default wake source in SBC Fail-Safe Mode .*

PWM_CTRL
PWM Configuration Control (Address 001 1000_B)
POR / Soft Reset Value: 0000 0000_B; Restart Value: xxxx $xxxx_B$

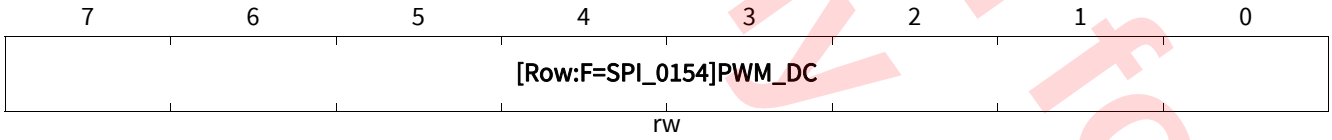

Field	Bits	Type	Description
PWM_DC	7:0	rw	PWM Duty Cycle Setting (bit0 = LSB; bit7 = MSB) 0000 0000_B, 100% OFF, i.e. HS/LS = OFF xxxx $xxxx_B$, ON with duty cycle fraction of 255 1111 1111_B, 100% ON, i.e. HS/LS always ON

Notes

1. *0% and 100% duty cycle settings are used to have the switch turned ON or OFF respectively.*
2. *A new duty cycle configuration will become effective after the previous period is completed.*
3. *The desired duty cycle should be set first before GPIO is enabled as PWM HS or PWM LS.*

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

PWM_FREQ_CTRL
PWM Frequency Configuration Control (Address 001 1100$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0000 00xx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0155]Reserved						[Row:F=SPI_0156]PWM_FREQ	
r						rw	

Field	Bits	Type	Description
Reserved	7:2	r	Reserved, always reads as 0
PWM_FREQ	1:0	rw	Spread Spectrum Modulation Frequency Setting 00_B , 100Hz configuration 01_B , 200Hz configuration 10_B , 325Hz configuration 11_B , 400Hz configuration

Note: A frequency change will become effective after the previous period is completed

HW_CTRL_3
Hardware Control 3 (Address 001 1101$_B$)
POR Value: 0000 0001$_B$; Restart Value/Soft Reset Value: 0000 0xxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0158]Reserved					[Row:F=SPI_0159]TSD_THR	[Row:F=SPI_0160]ICC1_LIM_ADJ	
r					rwl	rwl	

Field	Bits	Type	Description
Reserved	7:3	r	Reserved, always reads as 0
TSD_THR	2	rwl	Thermal Shutdown Threshold (TSD1 & TSD2) Configuration 0_B , Default shutdown threshold selected 1_B , higher shutdown threshold selected
ICC1_LIM_ADJ	1:0	rwl	Configuration of ICC1 current limitation 00_B , 1 step down from default value (-25% of typ. default) 01_B , default value (typ. 1000mA) 10_B , 1 step up form default value (+20% of default) 11_B , 2 steps up from default value (+50% of default), setting not recommended

Notes

1. *In case the CFG_LOCK_1 bit is set, then the soft reset value will be like the Restart value., i.e. the configuration stays unchanged.*

Confidential for ALRT Only

Confidential for ALRT Only

SYS_STATUS_CTRL_0
System Status Control Low Byte (Address 001 1110$_B$)
POR Value: 0000 0000$_B$; Restart Value/Soft Reset Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0162]SYS_STAT_L							
rw							

Field	Bits	Type	Description
SYS_STAT_L	7:0	rw	System Status Control Low Byte (bit0=LSB; bit7=MSB) Dedicated byte for system configuration, access only by microcontroller. Cleared after power up and Soft Reset

Notes

1. *The SYS_STATUS_CTRL_0 register is an exception for the default values, i.e. it will keep its configured value also after a Soft Reset.*
2. *This byte is intended for storing system configurations of the ECU by the microcontroller and is only writable in SBC Normal Mode and readable in SBC Stop Mode. The byte is not accessible by the SBC and contents are kept also after SBC Fail-Safe, Restart Mode or after Soft Reset. It allows the microcontroller to store system configuration without loosing the data as long as the SBC supply voltage is above $V_{POR,f}$.*

SYS_STATUS_CTRL_1
System Status Control High Byte (Address 001 1111$_B$)
POR Value: 0000 0000$_B$; Restart Value/Soft Reset Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0165]SYS_STAT_H							
rw							

Field	Bits	Type	Description
SYS_STAT_H	7:0	rw	System Status Control High Byte (bit8=LSB; bit15=MSB) Dedicated byte for system configuration, access only by microcontroller. Cleared after power up and Soft Reset

Notes

1. *The SYS_STATUS_CTRL_1 register has the same functionality and behavior as SYS_STATUS_CTRL_0.*

Confidential for ALRT Only

13.5.2 Selective Wake Control Registers

SWK_CTRL
CAN Selective Wake Control (Address 010 0000$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx 0000$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0167]OSC_CAL	[Row:F=SPI_0168]TRIM_EN		[Row:F=SPI_0169]CANTO_MASK	[Row:F=SPI_0170]Reserved			[Row:F=SPI_0171]CFG_VAL
rw	rw		rw	r			rwh

Field	Bits	Type	Description
OSC_CAL	7	rw	**Oscillator Calibration Mode** 0_B , Oscillator Calibration is disabled 1_B , Oscillator Calibration is enabled
TRIM_EN	6:5	rw	**(Un)locking mechanism of oscillator recalibration** 00_B , locked 01_B , locked 10_B , locked 11_B , unlocked
CANTO_MASK	4	rw	**CAN Time Out Masking** 0_B , CAN time-out is masked - no interrupt (on pin INTN) is triggered 1_B , CAN time-ut is signaled on INTN
Reserved	3:1	r	**Reserved, always reads as 0**
CFG_VAL	0	rwh	**SWK Configuration valid** 0_B , Configuration is not valid (SWK not possible) 1_B , SWK configuration valid, needs to be set to enable SWK

Notes

1. *TRIM_EN unlocks the oscillation calibration mode. Only the bit combination '11' is the valid unlock. The pin TXDCAN is used for oscillator synchronisation (trimming).*
2. *The microcontroller needs to validate the SWK configuration and set 'CFG_VAL' to '1'. The SBC will only enable SWK if CFG_VAL' to '1'. The bit will be cleared automatically by the SBC after a wake up or POR or if a SWK configuration data is changed by the microcontroller.*
3. *CANTO bit will only be updated inside BUS_STAT while CAN_2 is set. Therefore, an interrupt is only signaled upon occurrence of CANTO while CAN_2 (SWK is enabled) is set in SBC Normal and Stop Mode.*
4. *TRIM_EN also unlocks the writing to the SWK_OPT_CTRL register in order to enable the alternate low-power Receiver for Selective wake to optimize the quiescent current consumption. Only the bit combination '11' unlocks the calibrations / configurations.*

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

SWK_BTL0_CTRL
SWK Bit Timing Logic Control1 (Address 010 0001$_B$)
POR / Soft Reset Value: 1010 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0176]TBIT							
rw							

Field	Bits	Type	Description
TBIT	7:0	rw	**Number of Time Quanta in a Bit Time** Represents the number of time quanta in a bit time. Quanta is depending on SEL_OSC_CLK<1:0> from the SWK_CDR_CTRL2 register.

SWK_BTL1_CTRL
SWK Bit Timing Control2 (Address 010 0010$_B$)
POR / Soft Reset Value: 0011 0011$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0177]Reserved		[Row:F=SPI_0178]SP					
r		rw					

Field	Bits	Type	Description
Reserved	7:6	r	**Reserved, always reads as 0**
SP	5:0	rw	**Sampling Point Position** Represents the sampling point position (fractional number < 1). Example: 0011 0011 = 0.796875 (~80%)

SWK_ID3_CTRL
SWK WUF Identifier bits 28...21 (Address 010 0011$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0179]ID28_21							
rw							

Field	Bits	Type	Description
ID28_21	7:0	rw	**WUF Identifier Bits 28...21**

Note: Please note the configuration of the standard identifier and extended identifier. The standard identifier is configured to the bits ID18...ID28

Confidential for ALRT Only

SWK_ID2_CTRL
SWK WUF Identifier bits 20...13 (Address 010 0100$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0180]ID20_13							
rw							

Field	Bits	Type	Description
ID20_13	7:0	rw	WUF Identifier Bits 20...13

SWK_ID1_CTRL
SWK WUF Identifier bits 12...5 (Address 010 0101$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0181]ID12_5							
rw							

Field	Bits	Type	Description
ID12_5	7:0	rw	WUF Identifier Bits 12...5

SWK_ID0_CTRL
SWK WUF Identifier bits 4...0 (Address 010 0110$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0xxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0182]Reserved	[Row:F=SPI_0183]ID4_0					[Row:F=SPI_0184]RTR	[Row:F=SPI_0185]IDE
r	rw					rw	rw

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
ID4_0	6:2	rw	WUF Identifier Bits 4..0
RTR	1	rw	Remote Transmission Request Field (acc. ISO 11898-1) 0_B , Normal Data Frame 1_B , Remote Transmission Request
IDE	0	rw	Identifier Extension Bit 0_B , Standard Identifier Length (11 bit) 1_B , Extended Identifier Length (29 bit)

Note: The setting RTR = 1 is not allowed for wake-up frames according to the ISO11898-6

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

SWK_MASK_ID3_CTRL
SWK WUF Identifier Mask bits 28...21 (Address 010 0111$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

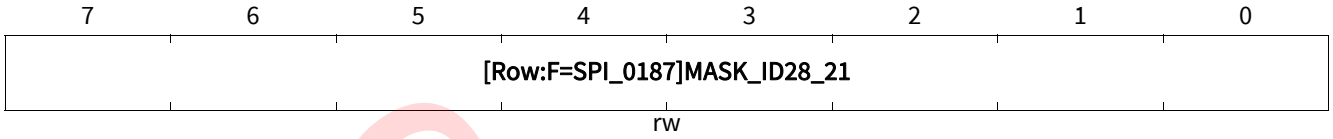

Field	Bits	Type	Description
MASK_ID28_21	7:0	rw	WUF Identifier Mask Bits 28...21 0_B , Unmasked - bit is ignored 1_B , Masked - bit is compared in CAN frame

Note: Masking WUF bits is done by setting the respective MASK bit to '1'

SWK_MASK_ID2_CTRL
SWK WUF Identifier Mask bits 20...13 (Address 010 1000$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

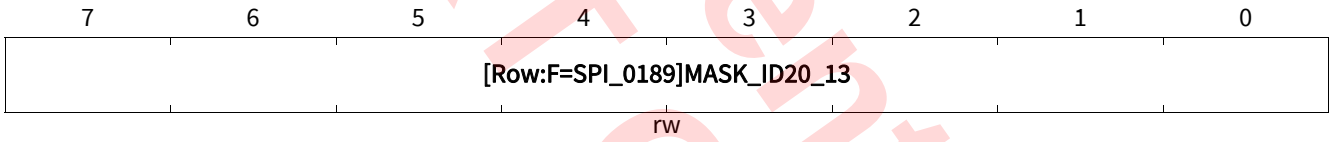

Field	Bits	Type	Description
MASK_ID20_13	7:0	rw	WUF Identifier Mask Bits 20...13 0_B , Unmasked - bit is ignored 1_B , Masked - bit is compared in CAN frame

SWK_MASK_ID1_CTRL
SWK WUF Identifier Mask bits 12...5 (Address 010 1001$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

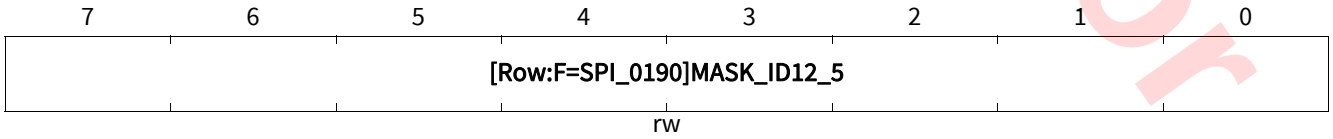

Field	Bits	Type	Description
MASK_ID12_5	7:0	rw	WUF Identifier Mask Bits 12...5 0_B , Unmasked - bit is ignored 1_B , Masked - bit is compared in CAN frame

Confidential for ALRT Only

SWK_MASK_ID0_CTRL
SWK WUF Identifier bits 4...0 (Address 010 1010_B)
POR / Soft Reset Value: 0000 0000_B; Restart Value: 0xxx $xx00_B$

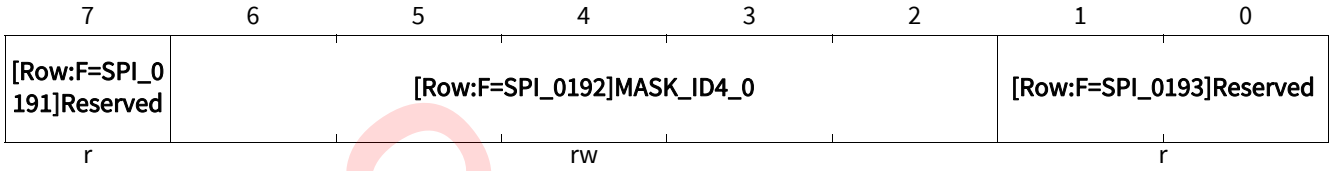

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
MASK_ ID4_0	6:2	rw	WUF Identifier MASK Bits 4..0 0_B , Unmasked - bit is ignored 1_B , Masked - bit is compared in CAN frame
Reserved	1:0	r	Reserved, always reads as 0

SWK_DLC_CTRL
SWK Frame Data Length Code Control (Address 010 1011_B)
POR / Soft Reset Value: 0000 0000_B; Restart Value: 0000 $xxxx_B$

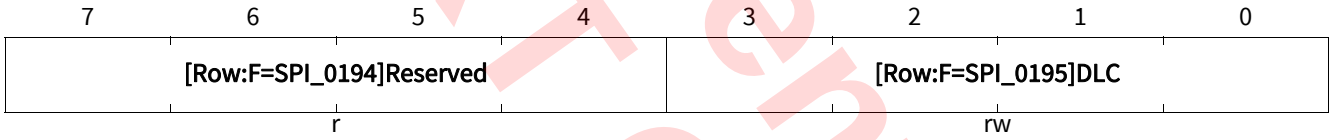

Field	Bits	Type	Description
Reserved	7:4	r	Reserved, always reads as 0
DLC	3:0	rw	Payload length in number of bytes 0000_B, Frame Data Length = 0 or cleared 0001_B, Frame Data Length = 1 0010_B, Frame Data Length = 2 0011_B, Frame Data Length = 3 0100_B, Frame Data Length = 4 0101_B, Frame Data Length = 5 0110_B, Frame Data Length = 6 0111_B, Frame Data Length = 7 from 1000_B to 1111_B Frame Data Length = 8

Note: The number of transmitted bytes in the data field has to be indicated by the DLC. The DLC value consists of four bits. The admissible number of data bytes for a data frame is in a range from zero to eight. DLCs in the range of zero to seven indicates data fields of length of zero to seven bytes. DLCs in the range from eight to fifteen indicate data fields with a length of eight bytes. The configured DLC value has to match bit by bit with the DLC in the received wake-up frame (refer also to Chapter 5.6.2.3).

Confidential for ALRT Only

SWK_DATA7_CTRL
SWK Data7 Register (Address 010 1100$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0197]DATA7							
rw							

Field	Bits	Type	Description
DATA7	7:0	rw	Data7 byte content(bit0=LSB; bit7=MSB)

SWK_DATA6_CTRL
SWK Data6 Register (Address 010 1101$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0198]DATA6							
rw							

Field	Bits	Type	Description
DATA6	7:0	rw	Data6 byte content (bit0=LSB; bit7=MSB)

SWK_DATA5_CTRL
SWK Data5 Register (Address 010 1110$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0199]DATA5							
rw							

Field	Bits	Type	Description
DATA5	7:0	rw	Data5 byte content (bit0=LSB; bit7=MSB)

SWK_DATA4_CTRL
SWK Data4 Register (Address 010 1111$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0200]DATA4							
rw							

Field	Bits	Type	Description
DATA4	7:0	rw	Data4 byte content (bit0=LSB; bit7=MSB)

Confidential for ALRT Only

SWK_DATA3_CTRL
SWK Data3 Register (Address 011 0000$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

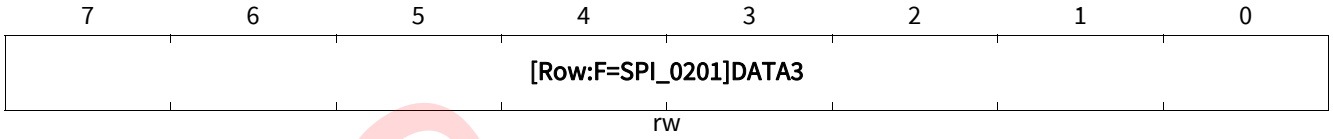

Field	Bits	Type	Description
DATA3	7:0	rw	Data3 byte content (bit0=LSB; bit7=MSB)

SWK_DATA2_CTRL
SWK Data2 Register (Address 011 0001$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

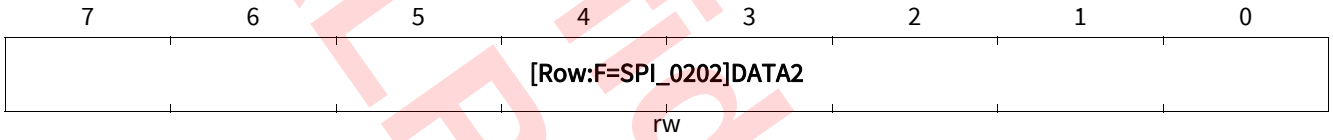

Field	Bits	Type	Description
DATA2	7:0	rw	Data2 byte content (bit0=LSB; bit7=MSB)

SWK_DATA1_CTRL
SWK Data1 Register (Address 011 0010$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

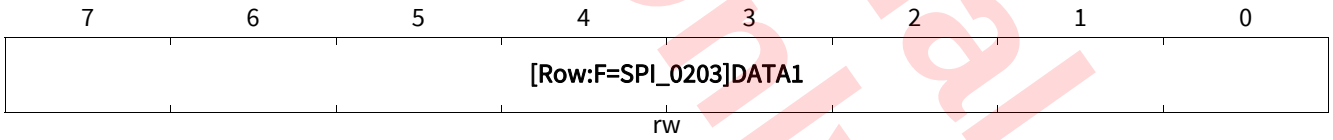

Field	Bits	Type	Description
DATA1	7:0	rw	Data1 byte content (bit0=LSB; bit7=MSB)

SWK_DATA0_CTRL
SWK Data0 Register (Address 011 0011$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

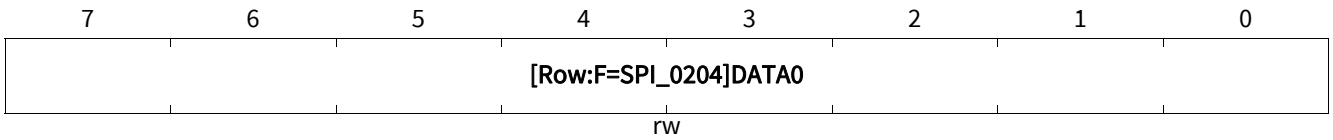

Field	Bits	Type	Description
DATA0	7:0	rw	Data0 byte content (bit0=LSB; bit7=MSB)

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

SWK_CAN_FD_CTRL
CAN FD Configuration Control Register (Address 011 0100$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 00xx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0205]Reserved		[Row:F=SPI_0206]DIS_ERR_CNT	[Row:F=SPI_0207]RX_FILT_BYP	[Row:F=SPI_0208]FD_FILTER			[Row:F=SPI_0209]CAN_FD_EN
r		rwh	rw	rw			rw

Field	Bits	Type	Description
Reserved	7:6	r	Reserved, always reads as 0
DIS_ERR_CNT	5	rwh	Error Counter Disable Function 0_B , Error Counter is enabled during SWK 1_B , Error counter is disabled during SWK only if CAN_FD_EN = '1'
RX_FILT_BYP	4	rw	RX Receiver Filter Bypass 0_B , RX Filter not bypassed 1_B , RX Filter bypassed
FD_FILTER	3:1	rw	CAN FD Dominant Filter Time 000_B , 50 ns 001_B , 100 ns 010_B , 150 ns 011_B , 200 ns 100_B , 250 ns 101_B , 300 ns 110_B , 350 ns 111_B , 700 ns
CAN_FD_EN	0	rw	Enable CAN FD Tolerant Mode 0_B , CAN FD Tolerant Mode disabled 1_B , CAN FD Tolerant Mode enabled

Note: The bit RX_FILT_ BYP is bypassing the analog filter in the CAN receiver path; The FD_FILTER is not in the analog path of the CAN receiver and is not bypassed.

Note: DIS_ERR_ CNT is cleared by the SBC at tsilence expiration.

Note: The Normal-Mode CAN receiver (RX_WK_ SEL = '0') has to selected with a CAN FD tolerant operation for baud rates > 2MBit/s

SWK_OSC_TRIM_CTRL
SWK Oscillator Trimming Register (Address 011 1000$_B$)
POR / Soft Reset Value: xxxx xxxx$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0212]TRIM_OSC							
rw							

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Field	Bits	Type	Description
TRIM_OSC	7:0	rw	Oscillator trimming (bit0=LSB; bit7=MSB); (only writable if TRIM_EN = '11')

Note: TRIM_OSC[0:4] represent the 32-steps fine trimming range with a monotonous behavior from slower to faster frequency. The step width is ~0.25MHz.
TRIM_OSC[5:7] are modifying the oscillator temperature coefficient. It is strongly recommended to not change these values.
Due to CDR functionality, it is not required to change these values.

SWK_OPT_CTRL
Selective Wake Options Register (Address 011 1001$_B$)
POR / Soft Reset Value: 000x xxxx$_B$; Restart Value: x00x xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0213]RX_WK_SEL	[Row:F=SPI_0214]Reserved		[Row:F=SPI_0215]TRIM_OSC				
rw	r		rw				

Field	Bits	Type	Description
RX_WK_SEL	7	rw	SWK Receiver selection (only accessible if TRIM_EN = '11') 0_B , Low-Power Receiver selected during SWK 1_B , Standard Receiver selected during SWK
Reserved	6:5	r	Reserved, always reads as 0
TRIM_OSC	4:0	rw	Oscillator trimming (bit8=LSB; bit12=MSB); (only writable if TRIM_EN = '11')

Note: The bit RX_WK_SEL is used to select the respective receiver during Selective Wake operation. The lowest quiescent current during Frame Detect Mode is achieved with the default setting RX_WK_SEL = '0', i.e. the Low-Power Receiver is already selected.

Note: TRIM_OSC[8:12] represent the 32-steps coarse trimming range, which is not monotonous.
It is not recommended to change these values.

SWK_OSC_CAL_H_STAT
SWK Oscillator Calibration High Register (Address 011 1010$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0217]OSC_CAL_H							
r							

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Field	Bits	Type	Description
OSC_CAL_H	7:0	r	Oscillator Calibration High Register

SWK_OSC_CAL_L_STAT
SWK Oscillator Calibration Low Register (Address 011 1011$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xxxx xxxx$_B$

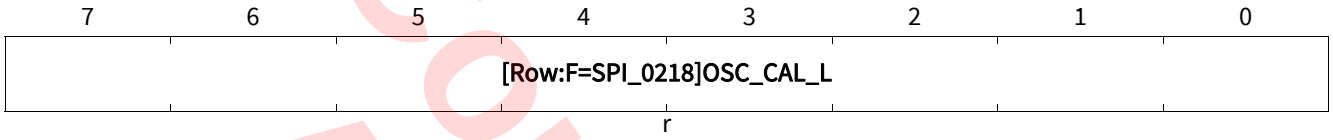

Field	Bits	Type	Description
OSC_CAL_L	7:0	r	Oscillator Calibration Low Register

SWK_CDR_CTRL1
CDR Control 1 Register (Address 011 1100$_B$)
POR / Soft Reset Value: 0000 0100$_B$; Restart Value: 0000 xx0x$_B$

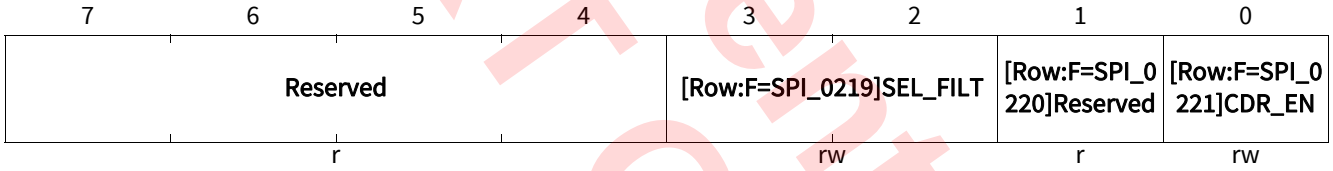

Field	Bits	Type	Description
Reserved	7:4	r	Reserved, always reads as 0
SEL_FILT	3:2	rw	Select Time Constant of Filter 00_B , Time constant 8 01_B , Time constant 16 (default) 10_B , Time constant 32 11_B , adapt distance between falling edges 2, 3 bit: Time constant 32 distance between f. edges 4, 5, 6, 7, 8 bit: Time constant 16 distance between falling edges 9, 10 bit: Time constant 8
Reserved	1	r	Reserved, always reads as 0
CDR_EN	0	rw	Enable CDR 0_B , CDR disabled 1_B , CDR enabled

Confidential for ALRT Only

SWK_CDR_CTRL2
CDR Control 2Register (Address 011 1101_B)
POR / Soft Reset Value: 0000 0000_B; Restart Value: 0000 $00xx_B$

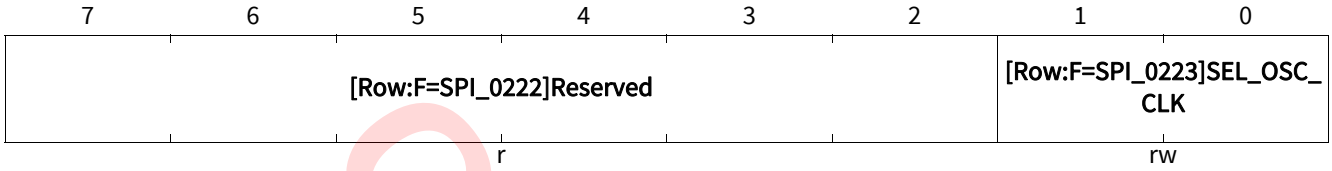

Field	Bits	Type	Description
Reserved	7:2	r	Reserved, always reads as 0
SEL_OSC_CLK	1:0	rw	Input Frequency for CDR module See Table 36 and Table 37.

Table 36 Frequency Settings of Internal Clock for the CDR

SEL_OSC_CLK[1:0]	int. Clock for CDR
00	80 MHz
01	40 MHz
10	20 MHz
11	10 MHz

Table 37 Recommended CDR Settings for Different Baud Rates

SEL_OSC_CLK [1:0]	Baudrate	SWK_BTL0_CTRL Value	SWK_CDR_LIMIT_HIGH_CTRL Value	SWK_CDR_LIMIT_LOW_CTRL Value
00	500k	1010 0000	1010 1000	1001 1000
01	500k	0101 0000	0101 0100	0100 1100
10	500k	CDR Setting not recommended for this baudrate due to insufficient precision		
11	500k	CDR Setting not recommended for this baudrate due to insufficient precision		
00	250k	CDR Setting not to be used due to excessive time quanta (counter overflow)		
01	250k	1010 0000	1010 1000	1001 1000
10	250k	0101 0000	0101 0100	0100 1100
11	250k	CDR Setting not recommended for this baudrate due to insufficient precision		
00	125k	CDR Setting not to be used due to excessive time quanta (counter overflow)		
01	125k	CDR Setting not to be used due to excessive time quanta (counter overflow)		
10	125k	1010 0000	1010 1000	1001 1000
11	125k	0101 0000	0101 0100	0100 1100

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

SWK_CDR_LIMIT_HIGH_CTRL
SWK CDR Upper Limit Control (Address 011 1110$_B$)
POR / Soft Reset Value: 1010 1000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0226]CDR_LIM_H							
rw							

Field	Bits	Type	Description
CDR_LIM_H	7:0	rw	Upper Bit Time Detection Range of Clock and Data Recovery SWK_BTL0_CTRL values > + 5% will be clamped

SWK_CDR_LIMIT_LOW_CTRL
SWK CDR Lower Limit Control (Address 011 1111$_B$)
POR / Soft Reset Value: 1001 1000$_B$; Restart Value: xxxx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0227]CDR_LIM_L							
rw							

Field	Bits	Type	Description
CDR_LIM_L	7:0	rw	Lower Bit Time Detection Range of Clock and Data Recovery SWK_BTL0_CTRL values < - 5% will be clamped

Confidential for ALRT Only

13.6 SPI Status Information Registers

READ/CLEAR Operation (see also Chapter 13.3):

- One 16-bit SPI command consist of two bytes:
  - the 7-bit address and one additional bit for the register access mode and
  - following the data byte
  The numbering of following bit definitions refers to the data byte and correspond to the bits D0...D7 and to the SPI bits 8...15 (see also figure).
- There are two different bit types:
  - 'r' = READ: read only bits (or reserved bits)
  - 'rc' = READ/CLEAR: readable and clearable bits
- Reading a register is done byte wise by setting the SPI bit 7 to "0" (= Read Only)
- Clearing a register is done byte wise by setting the SPI bit 7 to "1"
- SPI status registers are in general not cleared or changed automatically (an exception are the WD_FAIL bits). This must be done by the microcontroller via SPI command

The registers are addressed wordwise.

Table 38 Register Overview: SPI Status Information Registers

Register Short Name	Register Long Name	Offset Address	Reset Value
General Status Registers			
SUP_STAT_1	Supply Voltage Fail Status	$100\ 0000_B$	Page 156
SUP_STAT_0	Supply Voltage Fail Status	$100\ 0001_B$	Page 157
THERM_STAT	Thermal Protection Status	$100\ 0010_B$	Page 158
DEV_STAT	Device Information Status	$100\ 0011_B$	Page 158
BUS_STAT	Bus Communication Status	$100\ 0100_B$	Page 159
WK_STAT_0	Wake-up Source and Information Status 0	$100\ 0110_B$	Page 160
WK_STAT_1	Wake-up Source and Information Status 1	$100\ 0111_B$	Page 161
WK_LVL_STAT	WK Input Level	$100\ 1000_B$	Page 161
GPIO_OC_STAT	GPIO Overcurrent Status	$101\ 0100_B$	Page 162
GPIO_OL_STAT	GPIO Open-Load Status	$101\ 0101_B$	Page 163
Selective Wake Status Registers			
SWK_STAT	Selective Wake Status	$111\ 0000_B$	Page 164
SWK_ECNT_STAT	SWK Status	$111\ 0001_B$	Page 164
SWK_CDR_STAT1	CDR Status 1 Register	$111\ 0010_B$	Page 165
SWK_CDR_STAT2	CDR Status 2 Register	$111\ 0011_B$	Page 165
Family and Product Information Register			
FAM_PROD_STAT	Family and Product Identification Register	$111\ 1110_B$	Page 166

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

13.6.1 General Status Registers

SUP_STAT_1
Supply Voltage Fail Status (Address 100 0000_B)
POR / Soft Reset Value: $0000\ 0000_B$; Restart Value: $0xx0\ 00xx_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0234]Reserved	[Row:F=SPI_0235]VS_UV	[Row:F=SPI_0331]VS_OV	[Row:F=SPI_0236]Reserved			[Row:F=SPI_0237]VCC1_OV	[Row:F=SPI_0238]VCC1_WARN
r	rc	rc	r			rc	rc

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
VS_UV	6	rc	VS Undervoltage Detection ($V_{S,UV}$) 0_B , No VS undervoltage detected 1_B , VS undervoltage detected (detection is only active when VCC1 is enabled - see also note below)
VS_OV	5	rc	VS Overvoltage Detection ($V_{S,UV}$) 0_B , No VS overvoltage detected 1_B , VS overvoltage detected (detection is only active when VCC1 is enabled - see also note below)
Reserved	4:2	r	Reserved, always reads as 0
VCC1_OV	1	rc	VCC1 Overvoltage Detection ($V_{CC1,OV,r}$) 0_B , No VCC1 overvoltage warning 1_B , VCC1 overvoltage detected
VCC1_WARN	0	rc	VCC1 Undervoltage Prewarning ($V_{PW,f}$) 0_B , No VCC1 undervoltage prewarning 1_B , VCC1 undervoltage prewarning detected

Notes

1. *The VCC1 undervoltage prewarning threshold $V_{PW,f}$ / $V_{PW,r}$ is a fixed threshold and independent of the VCC1 undervoltage reset thresholds.*
2. *VS under voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements. Exception: VS under voltage detection is also available in SBC Stop Mode if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold (VCC1_ WARN is set)*
3. *VS over voltage monitoring is not available in SBC Stop Mode due to current consumption saving requirements. Exception: VS over voltage detection is always available when the charge pump is enabled (CP_EN = '1') and also in SBC Stop Mode if the VCC1 load current is above the active peak threshold (I_PEAK_TH) or if VCC1 is below the VCC1 prewarning threshold (VCC1_ WARN is set)*

Confidential for ALRT Only

SUP_STAT_0
Supply Voltage Fail Status (Address 100 0001_B)
POR / Soft Reset Value: y000 0000_B; Restart Value: x00x $xx0x_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0241]POR	[Row:F=SPI_0242]Reserved		[Row:F=SPI_0243]VCC2_OT	[Row:F=SPI_0244]VCC2_UV	[Row:F=SPI_0245]VCC1_SC	[Row:F=SPI_0246]Reserved	[Row:F=SPI_0247]VCC1_UV
rc	r		rc	rc	rc	r	rc

Field	Bits	Type	Description
POR	7	rc	Power-On Reset Detection 0_B , No POR 1_B , POR occurred
Reserved	6:5	r	Reserved, always reads as 0
VCC2_OT	4	rc	VCC2 Over Temperature Detection 0_B , No over temperature 1_B , VCC2 over temperature detected
VCC2_UV	3	rc	VCC2 Under Voltage Detection ($V_{CC2,UV,f}$) 0_B , No VCC2 Under voltage 1_B , VCC2 under voltage detected
VCC1_SC	2	rc	VCC1 Short to GND Detection (<Vrtx for t>2ms after switch on) 0_B , No short 1_B , VCC1 short to GND detected
Reserved	1	r	Reserved, always reads as 0
VCC1_UV	0	rc	VCC1 UV-Detection (due to Vrtx reset) 0_B , No VCC1_UV detection 1_B , VCC1 UV-Fail detected

Notes

1. *The MSB of the POR/Soft Reset value is marked as 'y': the default value of the POR bit is set after Power-on reset (POR value = 1000 0000). However it will be cleared after a SBC Soft Reset command (Soft Reset value = 0000 0000).*
2. *During Sleep Mode, the bits VCC1_SC, VCC1_OV and VCC1_UV will not be set when VCC1 is off*
3. *The VCC1_UV bit is never updated in SBC Restart Mode, in SBC Init Mode it is only updated after RSTN was released, it is always updated in SBC Normal and Stop Mode, and it is always updated in any SBC modes in a VCC1_SC condition (after VCC1_UV = 1 for >2ms).*

Confidential for ALRT only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

THERM_STAT

Thermal Protection Status (Address 100 0010$_B$)

POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0000 xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0251]Reserved				[Row:F=SPI_0252]TSD2_SAFE	[Row:F=SPI_0253]TSD2	[Row:F=SPI_0254]TSD1	[Row:F=SPI_0255]TPW
r				rc	rc	rc	rc

Field	Bits	Type	Description
Reserved	7:4	r	Reserved, always reads as 0
TSD2_SAFE	3	rc	TSD2 Thermal Shut-Down Safe State Detection 0_B , No TSD2 safe state detected 1_B , TSD2 safe state detected: >16 consecutive TSD2 events occurred, next TSD2 waiting time will be 60s
TSD2	2	rc	TSD2 Thermal Shut-Down Detection 0_B , No TSD2 event 1_B , TSD2 OT detected - leading to SBC Fail-Safe Mode
TSD1	1	rc	TSD1 Thermal Shut-Down Detection 0_B , No TSD1 fail 1_B , TSD1 OT detected (affected module is disabled)
TPW	0	rc	Thermal Pre Warning 0_B , No Thermal Pre warning 1_B , Thermal Pre warning detected

Note: Temperature warning and shutdown bits are not reset automatically, even if the temperature pre warning or the TSD condition is not present anymore.

DEV_STAT

Device Information Status (Address 100 0011$_B$)

POR / Soft Reset Value: 0000 0000$_B$; Restart Value: xx00 xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0257]DEV_STAT		[Row:F=SPI_0258]Reserved		[Row:F=SPI_0259]WD_FAIL		[Row:F=SPI_0260]SPI_FAIL	[Row:F=SPI_0261]FAILURE
rc		r		rh		rc	rc

Confidential for ALRT Only

Field	Bits	Type	Description
DEV_STAT	7:6	rc	Device Status before Restart Mode 00_B , Cleared (Register must be actively cleared) 01_B , Restart due to failure (WD fail, TSD2, VCC1_UV, trial to access SLEEP MODE without any wake source activated); also after a wake from Fail-Safe Mode 10_B , Sleep Mode 11_B , Reserved
Reserved	5:4	r	Reserved, always reads as 0
WD_FAIL	3:2	rh	Number of WD-Failure Events (1/2 WD failures depending on CFG1) 00_B , No WD Fail 01_B , 1x WD Fail, FO activation - Config 2 selected 10_B , 2x WD Fail, FO activation - Config 1 / 3 / 4 selected 11_B , Reserved (never reached)
SPI_FAIL	1	rc	SPI Fail Information 0_B , No SPI fail 1_B , Invalid SPI command detected
FAILURE	0	rc	Activation of Fail Output FO 0_B , No Failure 1_B , Failure occurred

Notes

1. *The bits DEV_STAT show the status of the device before exiting SBC Restart Mode. Either the device came from regular SBC Sleep Mode or a failure (SBC Restart or SBC Fail-Safe Mode) occurred. See also "Invalid SPI Commands" in Chapter 13.2. Coming from SBC Sleep Mode will also be shown if there was a trial to enter SBC Sleep Mode without having cleared all wake flags before.*
2. *The WD_FAIL bits are implemented as a counter and are the only status bits, which are cleared automatically by the SBC. See also Chapter 11.1.1.*
3. *The SPI_FAIL bit can only be cleared via SPI command*
4. *In case of Config 2/4 the WD_Fail counter is frozen in case of WD trigger failure until a successful WD trigger.*

BUS_STAT
Bus Communication Status (Address 100 0100_B)
POR / Soft Reset Value: 0000 0000_B; Restart Value: 000x $xxxx_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0274]Reserved	[Row:F=SPI_0275]Reserved		[Row:F=SPI_0276]CANTO	[Row:F=SPI_0277]SYSERR	[Row:F=SPI_0278]CAN_FAIL		[Row:F=SPI_0279]VCAN_UV
r	r		rc	rc	rc		rc

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
Reserved	6:5	r	Reserved, always reads as 0

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Field	Bits	Type	Description
CANTO	4	rc	**CAN Time Out Detection** 0_B , Normal operation 1_B , CAN Time Out detected
SYSERR	3	rc	**SWK System Error** 0_B , Selective Wake Mode is possible 1_B , System Error detected, SWK enabling not possible
CAN_FAIL	2:1	rc	**CAN Failure Status** 00_B , No error 01_B , CAN TSD shutdown 10_B , CAN_TXD_DOM: TXD dominant time out detected (P_9.3.39) 11_B , CAN_BUS_DOM: BUS dominant time out detected (P_9.3.40)
VCAN_UV	0	rc	**Under voltage CAN Bus Supply** 0_B , Normal operation 1_B , CAN Supply under voltage detected. Transmitter disabled

Notes

1. *CAN Recovery Conditions:*
   1.) TXD Time Out: TXD goes HIGH or transmitter is set to wake capable or switched off;
   2.). Bus dominant time out: Bus will become recessive or transceiver is set to wake capable or switched off.
   3.) Supply under voltage: as soon as the threshold is crossed again, i.e. VCAN > VCAN_UV for CAN
   4.)In all cases (also for TSD shutdown): to enable the Bus transmission again, TXD needs to be HIGH (recessive) for a certain time (transmitter enable time).
2. *The VCAN_UV comparator is enabled if the mode bit CAN_1 = '1', i.e. in CAN Normal or CAN Receive Only Mode.*
3. *CANTO will be set only if CAN2 = 1 (=SWK Mode enabled). It will be set as soon as CANSIL was set and will stay set even in CANSIL it is reset. An interrupt is issued in SBC Stop- and SBC Normal Mode as soon as CANTO is set and the interrupt is not masked out, i.e. CANTO_MASK must be set to 1.*
4. *The SYSERR Flag is set in case of a configuration error and in case of an error counter overflow (n>32). It is only updated if SWK is enabled (CAN_2 = '1'). See also Chapter 5.6.3.6.*
5. *CANTO is set asynchronously to the INTN pulse. In order to prevent undesired clearing of CANTO and thus possibly missing this interrupt, the bit will be prevented from clearing (i.e. cannot be cleared) until the next falling edge of INTN.*

WK_STAT_0
Wake-up Source and Information Status 0 (Address 100 0110$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 00xx x00x$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0285]Reserved		[Row:F=SPI_0286]CAN_WU	[Row:F=SPI_0287]TIMER_WU	[Row:F=SPI_0288]Reserved			[Row:F=SPI_0289]WK_WU
r		rc	rc	r			rc

Field	Bits	Type	Description
Reserved	7:6	r	Reserved, always reads as 0

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Field	Bits	Type	Description
CAN_WU	5	rc	**Wake up via CAN Bus** 0_B , No Wake up 1_B , Wake up
TIMER_WU	4	rc	**Wake up via TimerX** 0_B , No Wake up 1_B , Wake up
Reserved	3:1	r	**Reserved, always reads as 0**
WK_WU	0	rc	**Wake up via WK** 0_B , No Wake up 1_B , Wake up

Note: The respective wake source bit will also be set when the device is woken from SBC Fail-Safe Mode

WK_STAT_1
Wake-up Source and Information Status 1 (Address 100 0111$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0x00 0000$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0291]Reserved			[Row:F=SPI_0292]GPIO_WK_WU	[Row:F=SPI_0293]Reserved			
r			rc	r			

Field	Bits	Type	Description
Reserved	7:5	r	**Reserved, always reads as 0**
GPIO_WK_WU	4	rc	**Wake up via GPIO if configured as WK** 0_B , No Wake up 1_B , Wake up
Reserved	3:0	r	**Reserved, always reads as 0**

WK_LVL_STAT
WK Input Level (Address 100 1000$_B$)
POR / Soft Reset Value: xx0x 000x$_B$; Restart Value: xx0x 000x$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0294]SBC_DEV_LVL	[Row:F=SPI_0295]CFG0_STATE	[Row:F=SPI_0296]Reserved	[Row:F=SPI_0297]GPIO_LVL	[Row:F=SPI_0298]Reserved			[Row:F=SPI_0299]WK_LVL
r	r	r	r	r			r

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Field	Bits	Type	Description
SBC_DEV_LVL	7	r	**Status of SBC Operating Mode at TEST Pin** 0_B , User Mode activated 1_B , SBC Development Mode activated
CFG0_STATE	6	r	**Device Configuration Status on pin INTN** 0_B , No external pull-up resistor connected on INTN (Config 2/4) 1_B , External pull-up resistor connected on INTN (Config 1/3)
Reserved	5	r	**Reserved, always reads as 0**
GPIO_LVL	4	r	**Status of GPIO if configured as GPIO (WK, LS or HS function)** 0_B , Low Level (=0) 1_B , High Level (=1)
Reserved	3:1	r	**Reserved, always reads as 0**
WK_LVL	0	r	**Status of WK** 0_B , Low Level (=0) 1_B , High Level (=1)

Note: WK_LVL_STAT is updated in SBC Normal and Stop Mode and also in SBC Init and Restart Mode. See below for exceptions. In cyclic sense or wake mode, the registers contain the sampled level, i.e. the registers are updated after every sampling.

Note: GPIO_LVL is updated in SBC Normal and Stop Mode and also in SBC Init and Restart Mode if configured as wake input, low-side switch or high-side switch without cyclic sense (in case of FO configuration the status is flagged with the FAILURE bit). In case the respective feature is disabled then the WK_LVL_STAT bit will not be updated.

Note: In case the HV measurement function is enabled (WK_MEAS=1), then the bits WK_LVL and GPIO_LVL are not updated and reset.

GPIO_OC_STAT
GPIO Overcurrent Status (Address 101 0100$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0x00 0000$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0302]Reserved	[Row:F=SPI_0303]GPIO_OC	[Row:F=SPI_0304]Reserved					
r	rc	r					

Field	Bits	Type	Description
Reserved	7	r	**Reserved, always reads as 0**
GPIO_OC	6	rc	**Overcurrent Detection on GPIO (if configured as LS or HS)** 0_B , No OC 1_B , OC detected
Reserved	5:0	r	**Reserved, always reads as 0**

Confidential for ALRT Only

Note: The same status bit is used for the low-side and high-side configuration. The bit always applies for the actual configuration. In case the switch will be disabled or another configuration is used then a flagged bit will stay set until it is cleared by the microcontroller;

GPIO_OL_STAT
GPIO Open-Load Status (Address 101 0101$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0x00 0000$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0305]Reserved	[Row:F=SPI_0306]GPIO_OL	[Row:F=SPI_0307]Reserved					
r	rc	r					

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
GPIO_OL	6	rc	Open-Load Detection on GPIO (if configured as HS) 0_B , No OL 1_B , OL detected
Reserved	5:0	r	Reserved, always reads as 0

Confidential for ALRT Only

13.6.2 Selective Wake Status Registers

SWK_STAT
Selective Wake Status (Address 111 0000$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 0x00 xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0308]Reserved	[Row:F=SPI_0309]SYNC	[Row:F=SPI_0310]Reserved		[Row:F=SPI_0311]CANSIL	[Row:F=SPI_0312]SWK_SET	[Row:F=SPI_0313]WUP	[Row:F=SPI_0314]WUF
r	r	r		r	r	r	r

Field	Bits	Type	Description
Reserved	7	r	Reserved, always reads as 0
SYNC	6	r	Synchronisation (at least one CAN frame without fail must have been received) 0_B , SWK function not working or not synchronous to CAN bus 1_B , Valid CAN frame received, SWK function is synchronous to CAN bus
Reserved	5:4	r	Reserved, always reads as 0
CANSIL	3	r	CAN Silent Time during SWK operation 0_B , tsilence not exceeded 1_B , set if tsilence is exceeded.
SWK_SET	2	r	Selective Wake Activity 0_B , Selective Wake is not active 1_B , Selective Wake is activated
WUP	1	r	Wake-up Pattern Detection 0_B , No WUP 1_B , WUP detected
WUF	0	r	SWK Wake-up Frame Detection (acc. ISO 11898-6) 0_B , No WUF 1_B , WUF detected

Note: SWK_SET is set to flag that the selective wake functionality is activated (SYSERR = 0, CFG_VAL = 1, CAN_2 = 1). The selective wake function is activated via a CAN mode change, except if CAN = '100'.

SWK_ECNT_STAT
SWK Status (Address 111 0001$_B$)
POR / Soft Reset Value: 0000 0000$_B$; Restart Value: 00xx xxxx$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0316]Reserved		[Row:F=SPI_0317]ECNT					
r		r					

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b
Confidential for ALRT Only

Field	Bits	Type	Description
Reserved	7:6	r	**Reserved, always reads as 0**
ECNT	5:0	r	**SWK CAN Frame Error Counter** $00\ 0000_B$, No Frame Error $01\ 1111_B$, 31 Frame Errors have been counted $10\ 0000_B$, Error counter overflow - SWK function will be disabled

Note: If a frame has been received that is valid according to ISO 11898-1 and the counter is not zero, then the counter shall be decremented. If the counter has reached a value of 32, the following actions shall be performed: Selective Wake function shall be disabled, SYSERR shall be set and CAN wake capable function shall be enabled, which leads to a wake with the next WUP.

SWK_CDR_STAT1
CDR Status 1 Register (Address $111\ 0010_B$)
POR / Soft Reset Value: $1010\ 0000_B$; Restart Value: xxxx $xxxx_B$

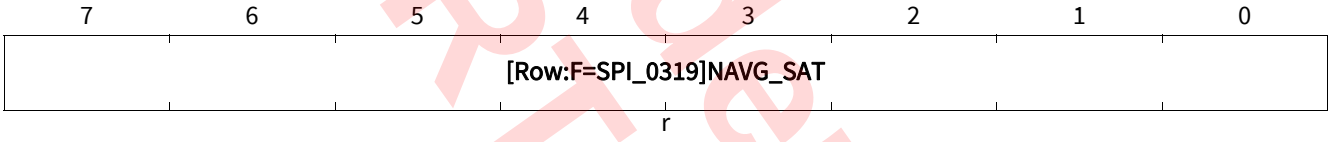

Field	Bits	Type	Description
NAVG_SAT	7:0	r	**Output Value from Filter Block** N_AVG is representing the integer part of the number of selected input clock frequency per CAN bus bit. N_AVG[11:4] e.g.160.75

SWK_CDR_STAT2
CDR Status 2 Register (Address $111\ 0011_B$)
POR / Soft Reset Value: $0000\ 0000_B$; Restart Value: xxxx $xxxx_B$

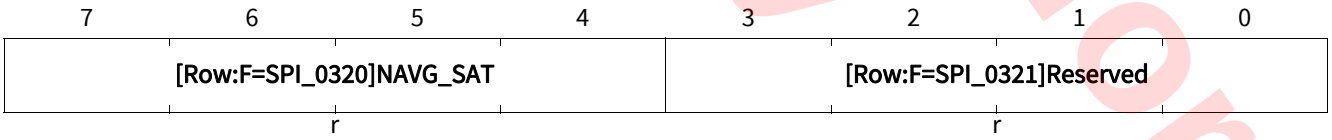

Field	Bits	Type	Description
NAVG_SAT	7:4	r	**Output Value from Filter Block** N_AVG is representing the fractional part of the number of selected input clock frequency per CAN bus bit. N_AVG[3:0] e.g.160.75
Reserved	3:0	r	**Reserved, always reads as 0**

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

13.6.3 Family and Product Information Register

FAM_PROD_STAT
Family and Product Identification Register (Address 111 1110$_B$)
POR / Soft Reset Value: 0101 yyyy $_B$; Restart Value: 0101 yyyy$_B$

7	6	5	4	3	2	1	0
[Row:F=SPI_0322]FAM				[Row:F=SPI_0323]PROD			
r				r			

Field	Bits	Type	Description
FAM	7:4	r	**SBC Family Identifier (bit4=LSB; bit7=MSB)** 0 0 01$_B$, Driver SBC Family 0 0 10$_B$, DC/DC-SBC Family 0 0 11$_B$, Mid-Range SBC Family 0 100$_B$, Multi-CAN SBC Family 0 101$_B$, LITE SBC Family 0 111$_B$, Mid-Range+ SBC Family x x x x$_B$, reserved for future products
PROD	3:0	r	**SBC Product Identifier (bit0=LSB; bit3=MSB)** 0 1 10$_B$, TLE9461ES (VCC1 = 5V, no SWK) 0 1 1 1$_B$, TLE9461ESV33 (VCC1 = 3.3V, no SWK) 0 1 1 0$_B$, TLE9461-3ES (VCC1 = 5V, SWK) 0 1 1 1$_B$, TLE9461-3ESV33 (VCC1 = 3.3V, SWK) 1 1 1 0$_B$, TLE9471ES (VCC1 = 5V, no SWK) 1 1 1 1$_B$, TLE9471ESV33 (VCC1 = 3.3V, no SWK) 1 1 1 0$_B$, TLE9471-3ES(VCC1 = 5V, SWK) 1 1 1 1$_B$, TLE9471-3ESV33 (VCC1 = 3.3V, SWK)

Notes

1. *The actual default register value after POR, Soft Reset or Restart of PROD will depend on the respective product. Therefore the value 'y' is specified.*
2. *SWK = Selective Wake feature in CAN Partial Networking standard*

Confidential for ALRT only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

13.7 Electrical Characteristics

Table 39 Electrical Characteristics

V_S = 5.5 V to 28 V, T_j = -40°C to +150°, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
SPI frequency							
Maximum SPI frequency	$f_{SPI,max}$	–	–	4.0	MHz	1)	P_16.7.1
SPI Interface; Logic Inputs SDI, CLK and CSN							
H-input Voltage Threshold	V_{IH}	–	–	0.7* V_{CC1}	V	–	P_16.7.2
L-input Voltage Threshold	V_{IL}	0.3* V_{CC1}	–	–	V	–	P_16.7.3
Hysteresis of input Voltage	V_{IHY}	–	0.12* V_{CC1}	–	V	1)	P_16.7.4
Pull-up Resistance at pin CSN	R_{ICSN}	25	40	55	kΩ	V_{CSN} = 0.7 x V_{CC1}	P_16.7.5
Pull-down Resistance at pin SDI and CLK	$R_{ICLK/SDI}$	25	40	55	kΩ	$V_{SDI/CLK}$ = 0.2 x V_{CC1}	P_16.7.6
Input Capacitance at pin CSN, SDI or CLK	C_I	–	10	–	pF	1)	P_16.7.7
Logic Output SDO							
H-output Voltage Level	V_{SDOH}	V_{CC1} - 0.4	V_{CC1} - 0.2	–	V	I_{DOH} = -1.6 mA	P_16.7.8
L-output Voltage Level	V_{SDOL}	–	0.2	0.4	V	I_{DOL} = 1.6 mA	P_16.7.9
Tristate Leakage Current	I_{SDOLK}	-10	–	10	µA	V_{CSN} = V_{CC1}; 0 V < V_{DO} < V_{CC1}	P_16.7.10
Tristate Input Capacitance	C_{SDO}	–	10	15	pF	1)	P_16.7.11
Data Input Timing[1)]							
Clock Period	t_{pCLK}	250	–	–	ns	–	P_16.7.12
Clock High Time	t_{CLKH}	125	–	–	ns	–	P_16.7.13
Clock Low Time	t_{CLKL}	125	–	–	ns	–	P_16.7.14
Clock Low before CSN Low	t_{bef}	125	–	–	ns	–	P_16.7.15
CSN Setup Time	t_{lead}	250	–	–	ns	–	P_16.7.16
CLK Setup Time	t_{lag}	250	–	–	ns	–	P_16.7.17
Clock Low after CSN High	t_{beh}	125	–	–	ns	–	P_16.7.18
SDI Set-up Time	t_{DISU}	100	–	–	ns	–	P_16.7.19
SDI Hold Time	t_{DIHO}	50	–	–	ns	–	P_16.7.20
Input Signal Rise Time at pin SDI, CLK and CSN	t_{rIN}	–	–	50	ns	–	P_16.7.21

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 39 Electrical Characteristics (cont'd)

V_S = 5.5 V to 28 V, T_j = -40°C to +150°, all voltages with respect to ground, positive current flowing into pin (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or Test Condition	Number
		Min.	Typ.	Max.			
Input Signal Fall Time at pin SDI, CLK and CSN	t_{fIN}	–	–	50	ns	–	P_16.7.22
Delay Time for Mode Changes[2)]	$t_{Del,Mode}$	–	–	6	µs	includes internal oscillator tolerance	P_16.7.23
CSN High Time	$t_{CSN(high)}$	3	–	–	µs	–	P_16.7.24
Data Output Timing[1)]							
SDO Rise Time	t_{rSDO}	–	30	80	ns	C_L = 100 pF	P_16.7.25
SDO Fall Time	t_{fSDO}	–	30	80	ns	C_L = 100 pF	P_16.7.26
SDO Enable Time	t_{ENSDO}	–	–	50	ns	low impedance	P_16.7.27
SDO Disable Time	t_{DISSDO}	–	–	50	ns	high impedance	P_16.7.28
SDO Valid Time	t_{VASDO}	–	–	50	ns	C_L = 100 pF	P_16.7.29

1) Not subject to production test; specified by design

2) Applies to all mode changes triggered via SPI commands

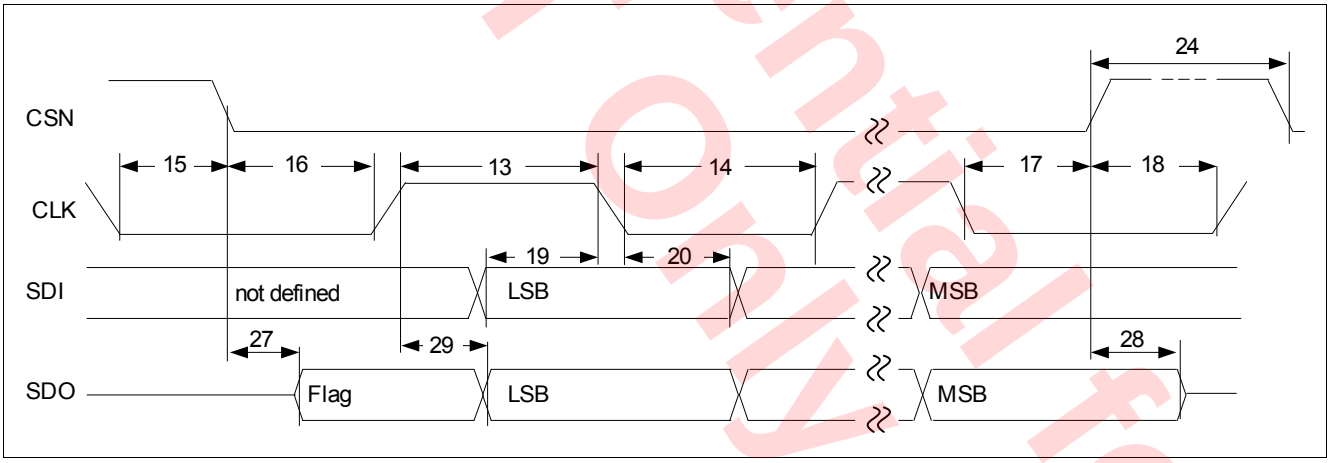

Figure 49 SPI Timing Diagram

Note: Numbers in drawing correlate to the last 2 digits of the Number field in the Electrical Characteristics table.

Confidential for ALRT Only

Confidential for ALRT Only

14 Application Information

Note: The following information is given as a hint for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

14.1 Application Diagrams

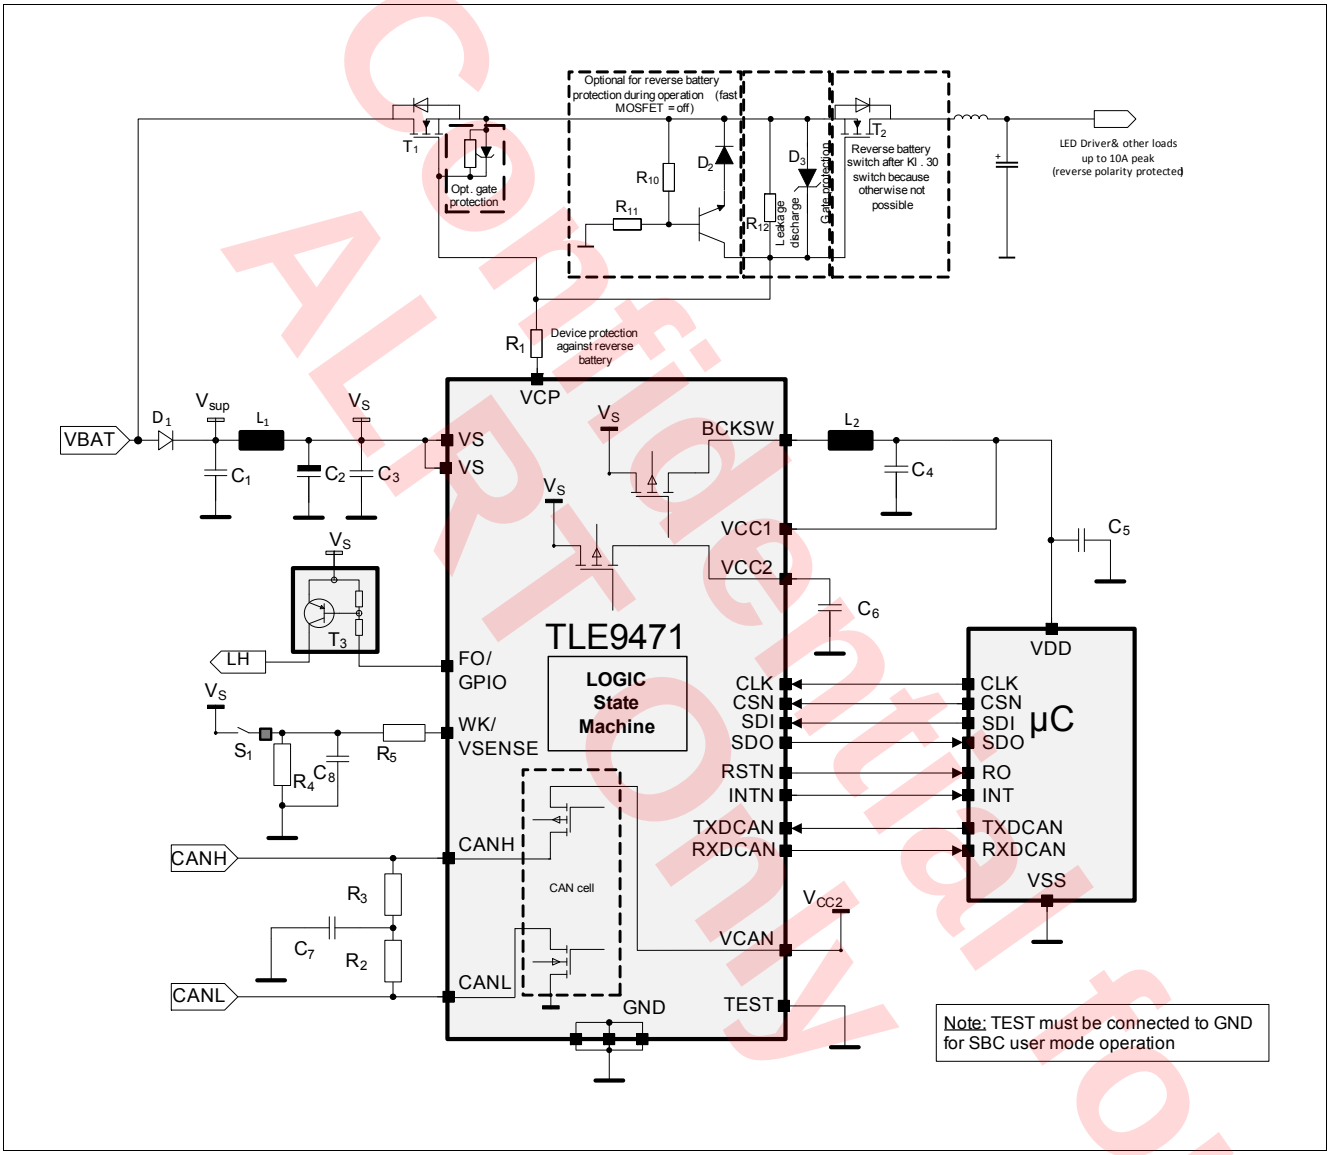

Figure 50 TLE9471-3ES Application Diagram

Note: This is a very simplified example of an application circuit. The function must be always verified in the real application.

Confidential for ALRT Only

Figure 51 shows the required circuitry for an off-board LED control using the GPIO pin with the high-side switch configuration.

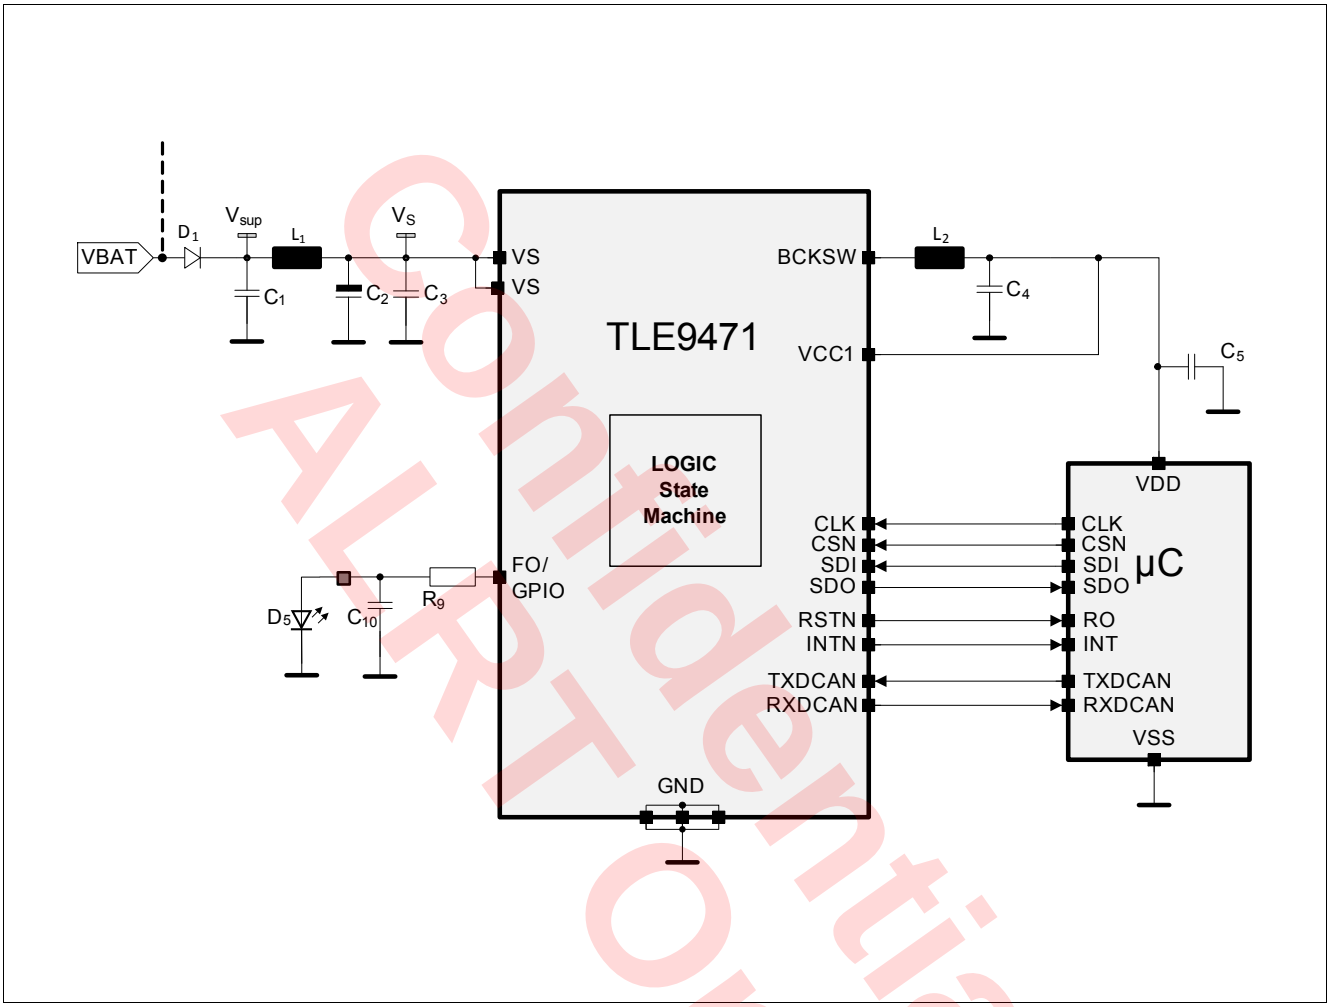

Figure 51 Simplified Application Diagram showing a off-board LED control with the GPIO pin

Note: This is a very simplified example of an application circuit. The off-board LED control function must be verified in the real application. The external circuitry is a minimum requirement and may vary depending on respective requirements.

Confidential for ALRT Only

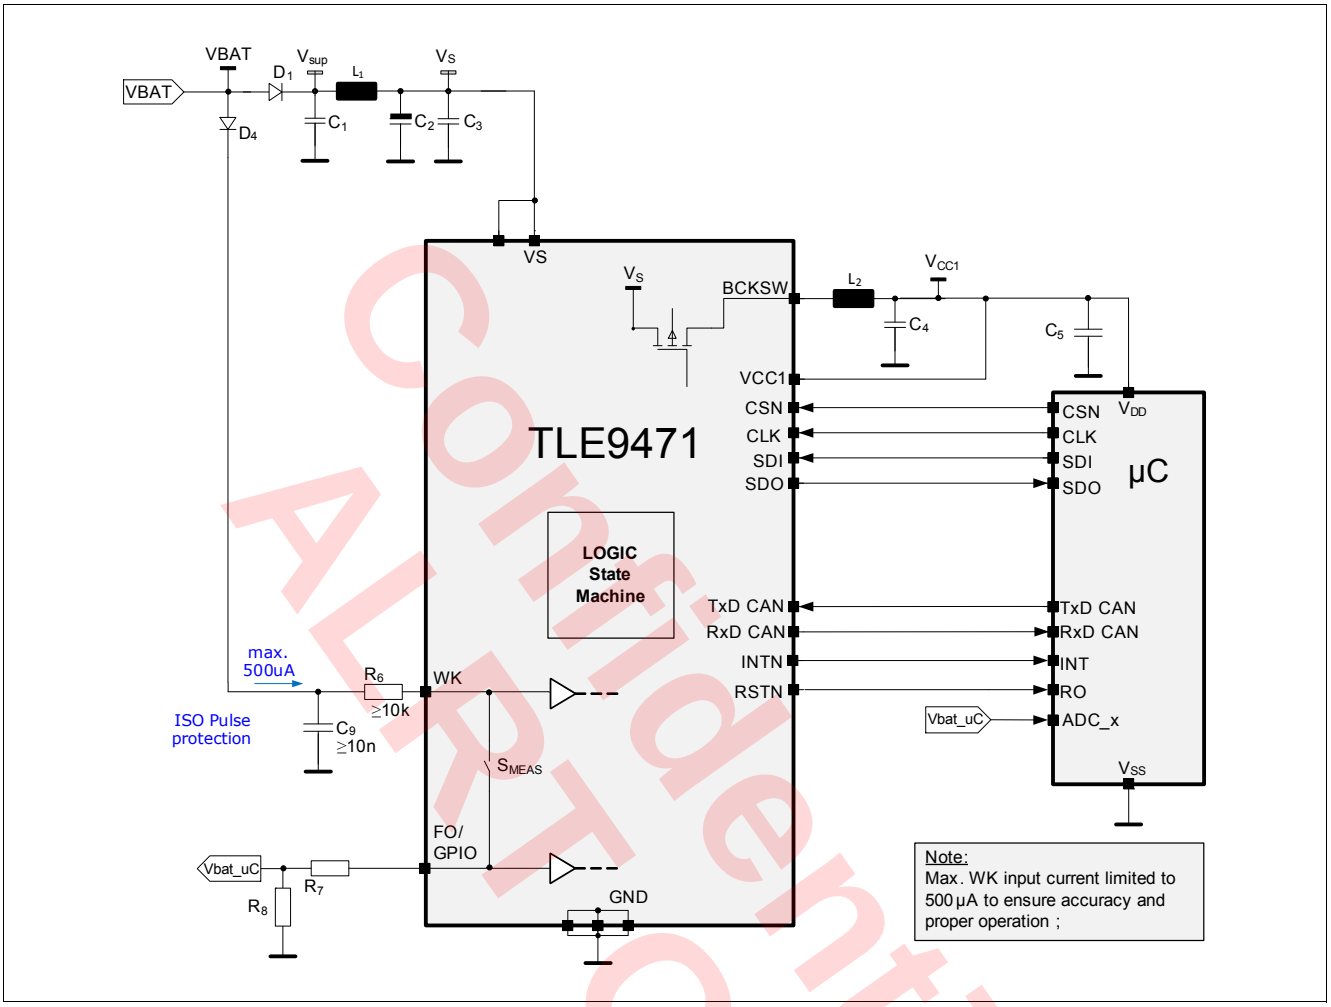

Figure 52 Simplified Application Diagram showing the Alternate High-Voltage Measurement Function via WK and FO/GPIO

Note: This is a simplified example of an application circuit. The function must be verified in the real application. WK must be connected to signal to be measured and FO/GPIO is the output to the microcontroller supervision function. The maximum current into WK must be <500uA. The minimum current into WK should be >5uA to ensure proper operation.

Confidential for ALRT Only

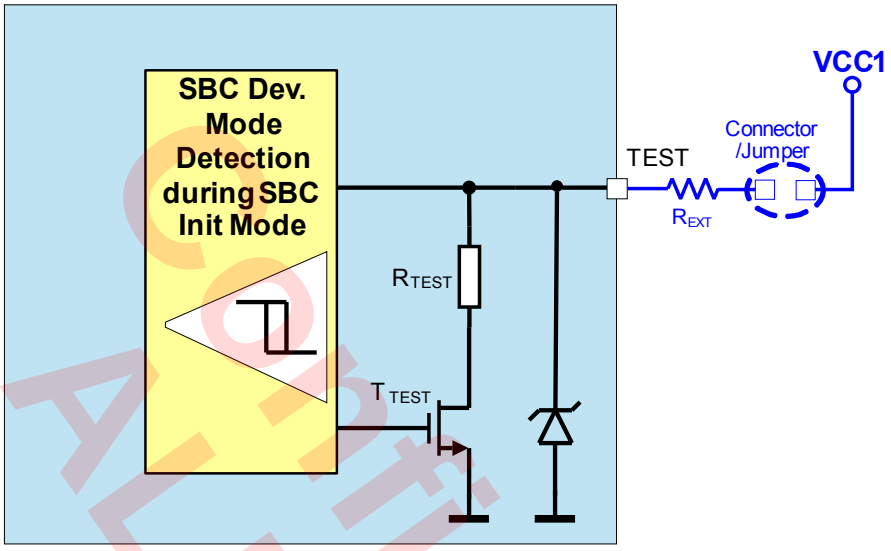

Figure 53 Hint for Increasing the Robustness of pin TEST during Debugging or Programming

Confidential for ALRT Only

Table 40 Bill of Material for Simplified Application Diagram

Ref.	Typical Value	Purpose / Comment
Capacitances		
C1	4.7µF	Optional input filter capacitor, recommended for suppression of EME
C2	68µF	Buffering capacitor to cut off battery spikes, value depending on application requirements
C3	100nF ceramic	EMC, blocking capacitor, ceramic X7R or equivalent, ESR < 50 mΩ
C4	22µF low ESR	Blocking capacitor, min. 10µF for stability (for a buck switching frequency of 2.2MHz)
C5	100nF ceramic	Spike filtering, ceramic X7R or equivalent, ESR < 50 mΩ to improve stability of supply for microcontroller; not needed for SBC
C6	2.2µF low ESR	Blocking capacitor, min. 470nF for stability; if used for CAN supply place a 100nF ceramic capacitor in addition very close to VCAN pin for optimum EMC behavior
C7	4.7nF / OEM dependent	Split termination stability
C8,9	10nF	Spike filtering, as required by application, mandatory protection for off-board connections, (see also Simplified Application Diagram with the Alternate Measurement Function)
C10	22nF	As required by application and GPIO current capability (see also Chapter 11.1.2), mandatory protection for off-board connections
Inductances		
L1	2.2µH	Optional input filter inductor, recommended for suppression of EME
L2	10µH	Output voltage inductor (for a buck switching frequency of 2.2MHz);
Resistances		
R1	1kΩ	Device protection against reverse battery
R2	60Ω / OEM dependent	CAN bus termination
R3	60Ω / OEM dependent	CAN bus termination
R4	10kΩ	Wetting current of the switch, as required by application
R5,6	10kΩ	WK pin current limitation, e.g. for ISO pulses (see also Simplified Application Diagram with the Alternate Measurement Function)
R7, 8	depending on application and microcontroller	Voltage Divider resistor to adjust measurement voltage to microcontroller ADC input range (see also Simplified Application Diagram with the Alternate Measurement Function)
R9	10Ω	As required by application, ESD protection, mandatory protection for off-board connections only
R10, 11	47kΩ	Reverse battery protection
R12	100kΩ	Leakage discharge resistor
Active Components		
D1	e.g. BAS 3010A, Infineon	Reverse polarity protection for VS supply pins
D2	e.g. BAS 21, Infineon	Reverse battery protection
D3	12V Zener Diode	Gate protection

Confidential for ALRT Only

Document ID: 8f8a0dd3-e334-4856-94fc-ed1f2500031b Confidential for ALRT Only

Table 40 Bill of Material for Simplified Application Diagram (cont'd)

Ref.	Typical Value	Purpose / Comment
D4	e.g. BAS 21, Infineon	Reverse battery protection for measurement circuitry
D5	e.g. LED	circuit example: Illumination LED
T1	e.g. IPB80N04S4-04	Terminal 30 (Kl. 30) Switch, N-MOSFET
T2	e.g. IPB80N04S4-04	Reverse battery protection, N-MOSFET
T3	e.g. BCR191W	High active FO control
uC	e.g. TC2xxx	Microcontroller

Confidential for ALRT Only

14.2 ESD Tests

Tests for ESD robustness according to IEC61000-4-2 “GUN test” (150 pF, 330 Ω) will be performed.
The results and test condition will be available in a test report. The values for the test are listed below.

Table 41 ESD “GUN test”[1)2)]

Performed Test	Result	Unit	Remarks
ESD at pin CANH, CANL, VS, WK, VCC2 versus GND	> 6	kV	positive pulse
ESD at pin CANH, CANL, VS, WK, VCC2 versus GND	< -6	kV	negative pulse

1) ESD susceptibility “ESD GUN” according to EMC 1.3 Test specification, Section 4.3 (IEC 61000-4-2). Tested by external test house (IBEE Zwickau, EMC Test report Nr. 07-11-17).
2) ESD Test “Gun Test” is specified with external components for pins VS, WK, and VCC2. See the application diagram in Chapter 14.1 for more information

EMC and ESD susceptibility tests according to SAE J2962-2 (2010) have been performed. Tested by external test house (UL LLC, Test report Nr. 201x-xxxx)

Confidential for ALRT Only

14.3 Thermal Behavior of Package

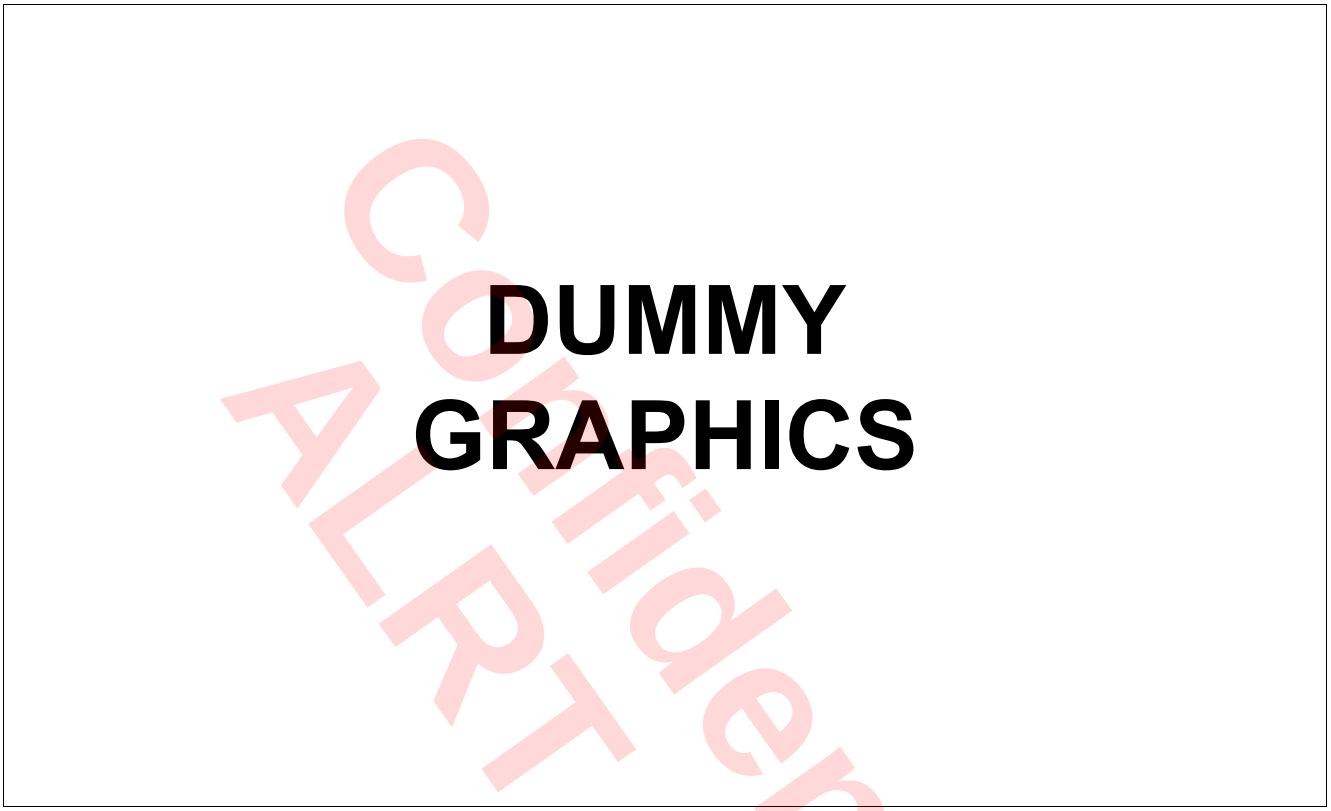

Figure 54 Thermal Resistance (R_{th_JA}) vs. Cooling Area

Confidential for ALRT Only

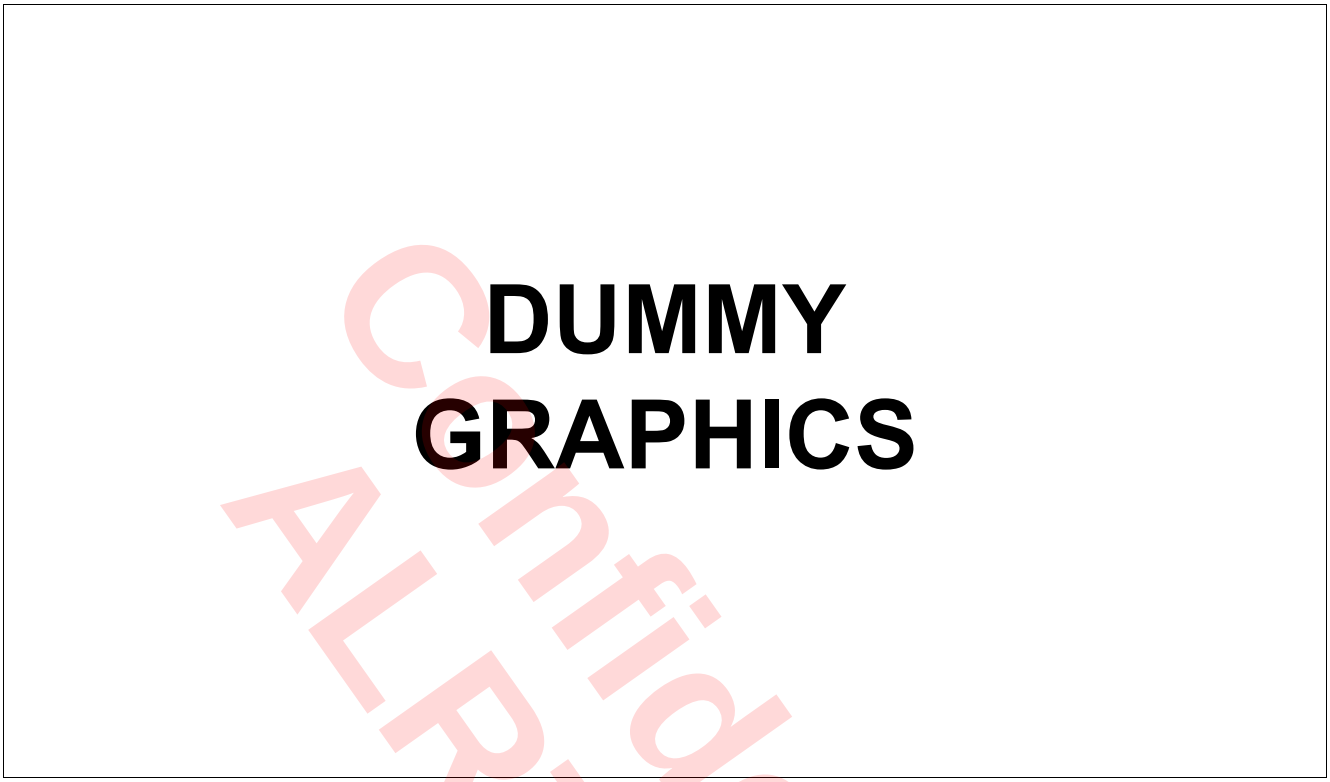

Figure 55 Board Setup

Board setup is defined according JESD 51-2, -5, -7.
Board: 76.2x114.3x1.5mm^3 with 2 inner copper layers (35µm thick), with thermal via array under the exposed pad contacting the first inner copper layer and 300mm^2 cooling area on the bottom layer (70µm).

14.4 Further Application Information

- Please contact us for information regarding the FMEA pin
- For further information you may contact http://www.infineon.com/

Confidential for ALRT Only

15 Package Outlines

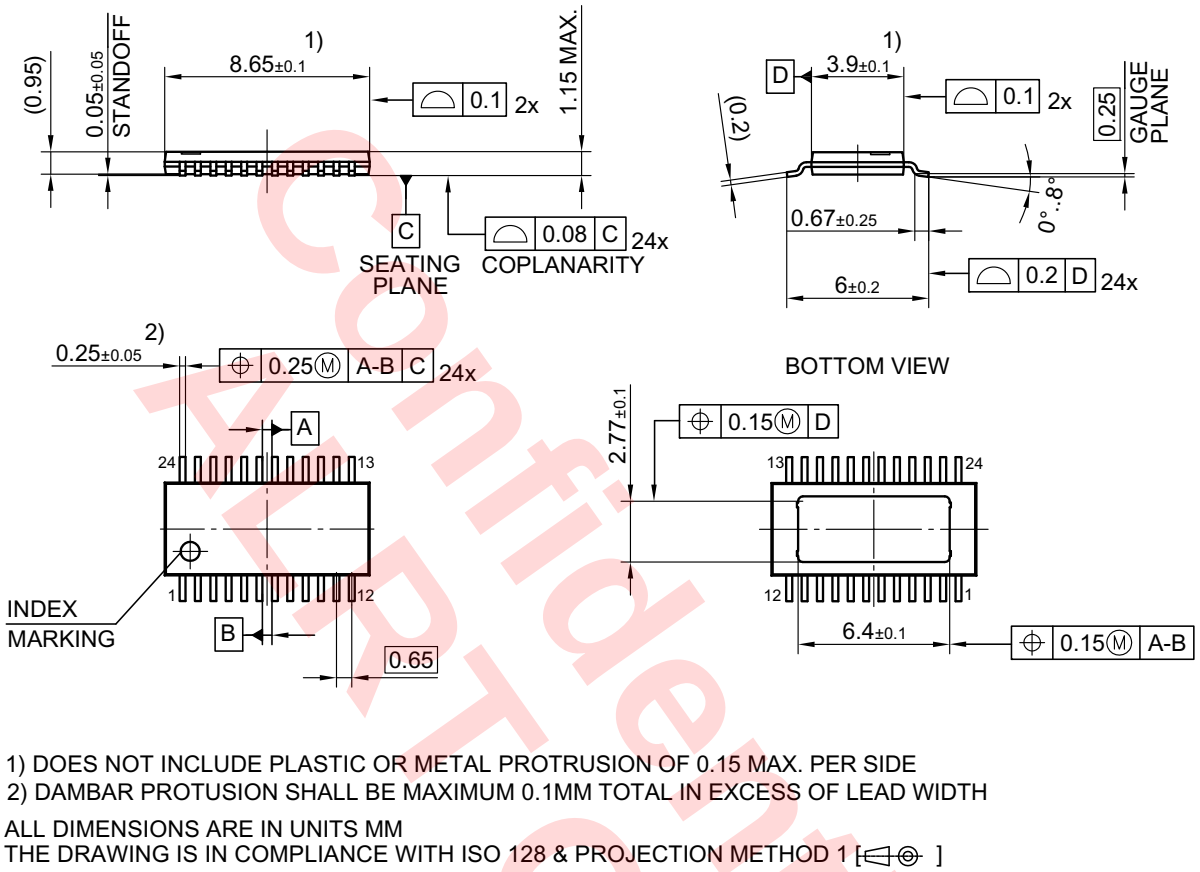

Figure 56 PG-TSDSO-24-1 Dimensions(target dimensions)

Note: The dimensions are subject to minor modifications during the product development. The dimensions will be final latest at start of product qualification.

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a green product. Green products are RoHS-Compliant (i.e Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

For further information on alternative packages, please visit our website:
http://www.infineon.com/packages.

Dimensions in mm

Confidential for ALRT Only

16 Revision History

Revision	Date	Changes
Changes vs. 0.50 (0.60 not released)		
0.60	2017-11-09	**General:** - updated CAN ISO standard reference to ISO11898-2:2016; - changed recommendation for n.c. pins to “leave open”; **General Product Characteristics:** -added new parameter P_4.1.20; -changed upper spec limit for P_4.4.2; -changed upper spec limit for P_4.4.3; -changed upper spec limit for P_4.4.4; -changed upper spec limit for P_4.4.5; -changed condition for P_4.4.8 - supply for VCAN is VCC2; **System Features:** -changed lower and upper spec limits for P_5.3.1; -changed lower spec limit for P_5.3.2 from 10V to 9.5V; -changed upper spec limit for P_5.3.4; -added new parameter P_5.13.5; -added new parameter P_5.13.6; -added new parameter P_5.13.7; -added new parameter P_5.13.8; **DCDC Chapter:** -updated test condition for P_6.3.14; -updated test condition for P_6.3.21; -updated test condition for P_6.3.22; -updated test condition for P_6.3.23; **Voltage Regulator 1:** -changed lower and upper spec limits for P_7.3.10; -changed lower and upper spec limits for P_7.3.11; -changed lower and upper spec limits for P_7.3.12; -updated test condition for P_7.3.13; -updated test condition for P_7.3.19; -updated test condition for P_7.3.20; -updated test condition for P_7.3.21;

Confidential for ALRT Only

Revision History

Revision	Date	Changes
0.60	2017-11-09	**Voltage Regulator 2:** -changed test condition for P_8.3.1; -inreased load current in test condition for P_8.3.2 from 40mA to 45mA; -changed lower, typ. and upper spec limits for P_8.3.3; -added lower spec limit P_8.3.6 and upper spec limit for P_8.3.7; -reduced upper spec limits for P_8.3.8 from 700mA to 450mA; **High-Speed CAN Transceiver:** - corrected physical symbol for $V_{CAN_UV,r}$; - changed upper spec limit for P_9.3.5; - changed upper spec limit for P_9.3.6; - changed upper spec limit for P_9.3.28; - added CAN differential range for P_9.3.2, P_9.3.3 P_9.3.10 and P_9.3.11; - removed P_9.3.30 and added P_9.3.53 instead to fulfill both CAN wake-up filter times acc. to ISO11898-2:2016; - changed typical value for P_9.3.34 and P_9.3.35; - reduced typical and upper spec limit for P_9.3.22; **Supervision:** - changed lower spec limit for P_13.9.3; - reduced lower spec limit for P_13.9.46 from 5us to 4.2us; - added parameter P_13.9.69; - added parameter P_13.9.67; - added parameter P_13.9.62; - added parameter P_13.9.64; - added parameter P_13.9.60; - added parameter P_13.9.61; - added parameter P_13.9.59;
0.60	2017-11-09	**Serial Peripheral Interface:** - corrected ON definition in PWM_CTRL; - added not for '11' settings for ICC1_LIM_ADJ; - corrected Mid-Range+ SBC Identifier in FAM Field; - updated PROD Identifiers for different product variants;
Changes vs. 0.60		

Confidential for ALRT Only

Revision History

Revision	Date	Changes
0.70	2017-11-17	**System Features:** - added upper spec limit for P_5.3.4 ; - removed P_5.3.8 and added frequency condition to P_5.3.1 -P_5.3.4, P_5.3.6, P_5.3.7; **DCDC Chapter:** - Updated current limitation in feature description; - clarified the feature overcurrent limitation - was partially called detection before; - The reference to the DCDC_OFFSET_EN was removed to only SBC Normal- and Restart Mode; - added the description current limitation configuration during power up of VCC1; - adapted footnote for P_6.3.14, P_7.3.19, P_7.3.20, P_7.3.21 to max. 20%; **Voltage Regulator 1:** - Updated current limitation in feature description; - clarified the feature overcurrent limitation - was partially called detection before; - removed internal note for DCDC_OFFSET_EN in LDO chapter; - adapted footnote for P_7.3.13, P_7.3.19, P_7.3.20, P_7.3.21 to max. 20%; - added the description current limitation configuration during power up of VCC1;
0.70	2017-11-17	**Voltage Regulator 2:** - removed temperature condition from P_8.3.3 because parameter can be fulfilled over whole temperature range; - updated test condition from 40 to 45mA for P_8.3.2; **High-Speed CAN Transceiver:** - added bus line voltage condition for P_9.3.7; - updated test condition for P_9.3.20 acc. to new ISO11898-2:2016; - changed lower spec limit from -500mV to -200mV for P_9.3.15; - updated footnote for P_9.3.19; - added lower and upper spec imit for P_9.3.27; - added new parameter P_9.3.51; - added new parameter P_9.3.52; - removed “-” from upper spec limit for P_9.3.34 and P_9.3.35 and updated typ. spec value; - added CAN FD timing parameters P_9.3.43 -P_9.3.47; - inserted new parameter P_9.3.49;

Confidential for ALRT Only

Confidential for ALRT Only

Confidential for ALRT Only

Trademarks of Infineon Technologies AG
AURIX™, C166™, CanPAK™, CIPOS™, CoolGaN™, CoolMOS™, CoolSET™, CoolSiC™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, DrBlade™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, Infineon™, ISOFACE™, IsoPACK™, i-Wafer™, MIPAQ™, ModSTACK™, my-d™, NovalithIC™, OmniTune™, OPTIGA™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, ReverSave™, SatRIC™, SIEGET™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, SPOC™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Trademarks updated August 2015

Other Trademarks
All referenced product or service names and trademarks are the property of their respective owners.

Edition 2017-12-14
Published by
Infineon Technologies AG
81726 Munich, Germany

© 2017 Infineon Technologies AG.
All Rights Reserved.

Do you have a question about any aspect of this document?
Email: erratum@infineon.com

Document reference
Z8F53477368

IMPORTANT NOTICE

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.